

CSCF VNF Lifecycle Management

Call Session Control Function

DESCRIPTION

Copyright

© Ericsson AB 2018. All rights reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

Disclaimer

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.

Trademark List

All trademarks mentioned herein are the property of their respective owners. These are shown in the document Trademark Information.



Contents

1	Understanding VNF Lifecycle Management	1
2	VNF Lifecycle Management Procedures	3





1 Understanding VNF Lifecycle Management

The Virtual Network Function Lifecycle Management (VNF-LCM) provides a workflow execution environment and a web-based application for managing VNF lifecycle procedures. The procedures are realized by executing ordered sequences of steps, called workflows, installed in the VNF-LCM. The workflows can be executed through the Or-Vnfm interface that is a REST API provided by VNF-LCM. Each workflow must be provided with VNF-specific input parameters during execution. For more information on the Or-Vnfm interface, see [ETSI GS NFV-IFA 007](#).

For small stack operation, the workflow manages virtual resources for the VNF by communicating with the Virtual Infrastructure Manager (VIM) API. For example, if Ericsson CEE is used, the HOT API is used at the Vi-Vnfm reference point.

The workflow calls LCM scripts to interact with the VNF for VNF-specific operations, such as configuration importing. The Lifecycle Manager (LCM) scripts access the VNF using the Secure Shell (SSH) or the NETCONF Northbound Interface (NBI).

For full stack operation, the workflow manages virtual resources for the VNF by communicating with the Network Functions Virtualization Orchestrator (NFVO).

Figure 1 shows an overview of a full Ericsson Stack and also the difference to a small stack.

Full Stack and Small Stack

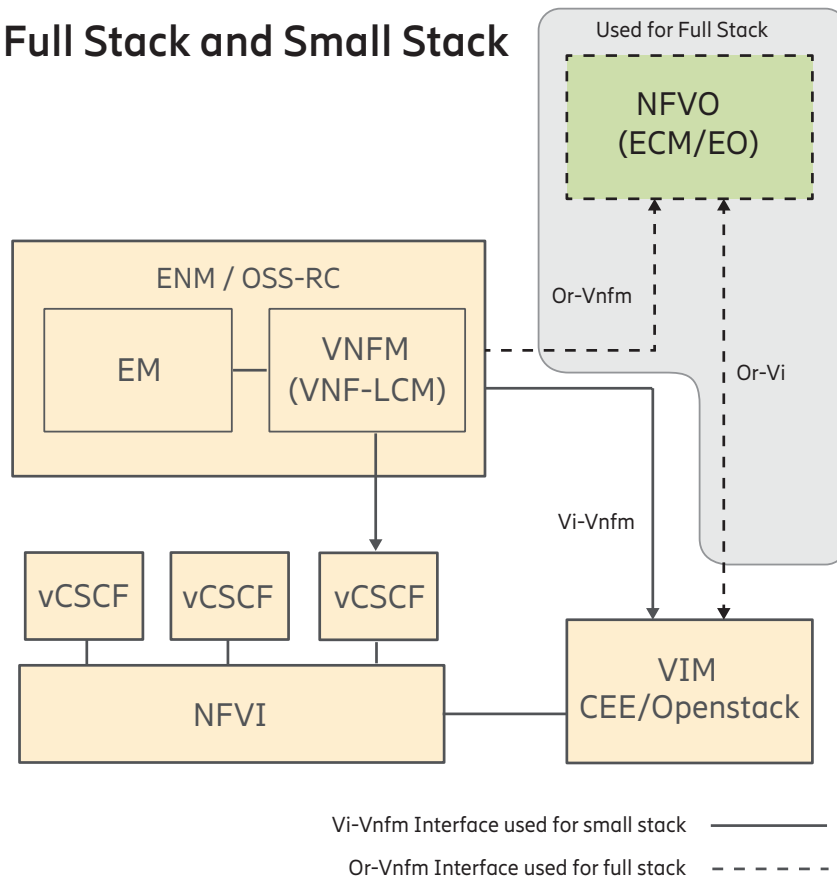


Figure 1 VNF-LCM Overview for Full and Small Stack Deployment Scenarios

The workflows can be executed through the following:

- Ericsson Orchestrator (EO)

For a Full Ericsson Stack, EO can be used to trigger workflows on VNF-LCM through the Or-Vnfm interface.

Note: EO is the only supported NFVO. It can be used only for instantiating and terminating VNFs on OpenStack VIM.

- VNF-LCM

For a Small Ericsson Stack, VNF-LCM is the only option.

To manage VNF lifecycle, it is required to install an Operations Support System for Radio and Core (OSS-RC) on the network. An OSS-RC is the Ericsson product acting as Element Management System (EMS) and specific Virtual Network Function Manager (VNFM) for the VNFs. VNF-LCM is the feature name in OSS-RC that fulfills specific VNFM functionality. For more information about EMS and VNFM, see Network Functions Virtualization (NFV); Architectural Framework, ETSI GS NFV 002, <http://www.etsi.org/standards>.



2 VNF Lifecycle Management Procedures

A VNF lifecycle is managed using VNF-LCM or EO.

The following procedures can be performed:

— Instantiate a VNF

A VNF is selected to be instantiated. The VNF starts handling traffic after the instantiation is finished and all manual post-installation steps are completed.

The procedure [Instantiate OpenStack VNF Using VNF-LCM](#) can be used for instantiating VNFs on OpenStack VIM and [Instantiate VMware VNF Using VNF-LCM](#) for VNFs on VMware VIM.

The procedure [Instantiate OpenStack VNF Using EO](#) can only be used for instantiating VNFs on OpenStack VIM.

— Scale out a VNF

Managed scaling adjusts the size of the VNF. The reason for this can be to adjust the size of the VNF according to the dimensioned virtual Call Session Control Function (vCSCF) cluster size. Scaling is also used after instantiation to scale out the node to the dimensioned size.

The procedure [Scale out OpenStack VNF Using VNF-LCM](#) can be used for scaling out VNFs on OpenStack VIM and [Scale out VMware VNF Using VNF-LCM](#) for VNFs on VMware VIM.

— Scale in a VNF

Managed scale-in reduces the size of the VNF. It is also possible to point out which Virtual Machine (VM) to scale in. The following is supported:

- Graceful scale-in is used for minimizing the traffic disturbance.
- Forceful scale-in is used when traffic disturbance is acceptable.

The procedure [Scale in OpenStack VNF Using VNF-LCM](#) can be used for scaling out VNFs on OpenStack VIM and [Scale in VMware VNF Using VNF-LCM](#) for VNFs on VMware VIM.

— Terminate a VNF

Terminating a VNF instance means that the VNF is taken out of service and the stack is deleted. The following is supported:

- Graceful termination means the VMs in the cluster are gracefully locked and the VNF instance gradually stops processing traffic. The VNF terminates after the expiration of a specified graceful termination period.



It is possible not to set a graceful termination period, in which case the VNF terminates only when all ongoing traffic stops.

- Forceful termination means that the VNF terminates immediately. All ongoing traffic is lost.

The procedure [Terminate OpenStack VNF Using VNF-LCM](#) can be used for scaling out VNFs on OpenStack VIM and [Terminate VMware VNF Using VNF-LCM](#) for VNFs on VMware VIM.

The procedure [Terminate OpenStack VNF Using EO](#) can only be used for terminating VNFs on OpenStack VIM.