

TK-370/378

SERVICE MANUAL

维修手册

KENWOOD

© 1996-3 PRINTED IN JAPAN
B51-8321-00 (B) 1412

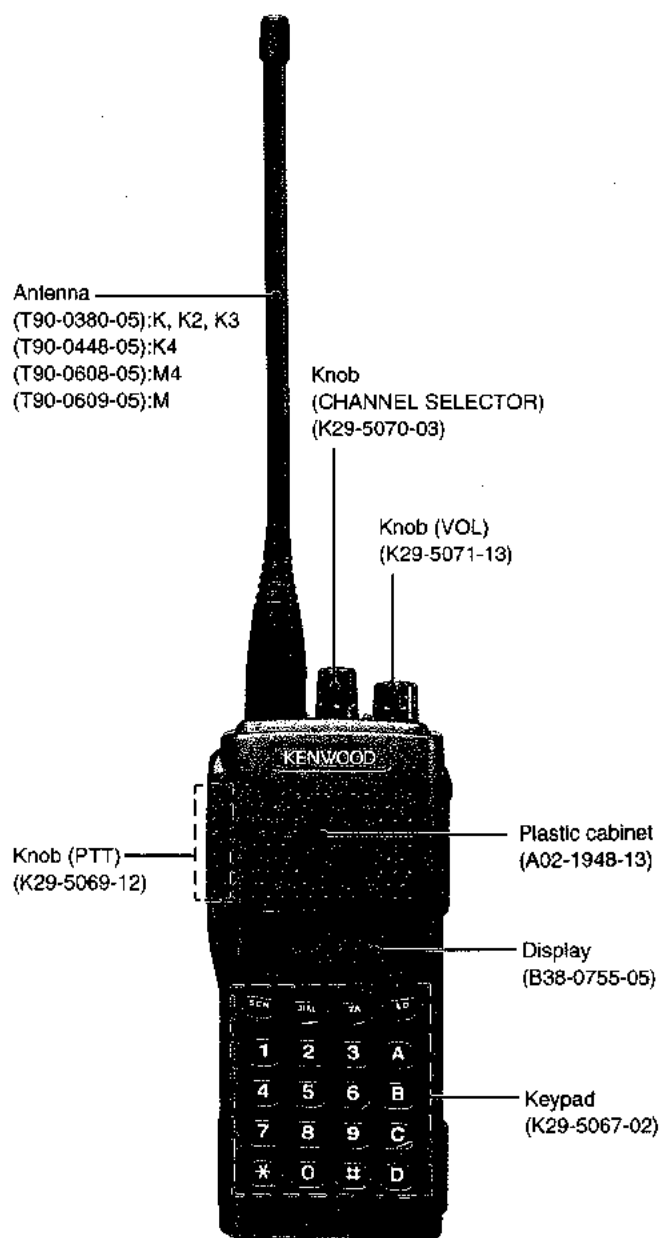


PHOTO is M, M4 TYPE

CONTENTS

GENERAL	2
REALIGNMENT	4
DISASSEMBLY FOR REPAIR	40
CIRCUIT DESCRIPTION	43
SEMICONDUCTOR DATA	53
DESCRIPTION OF COMPONENTS	58
PARTS LIST	62
EXPLODED VIEW	69
PACKING	70
ADJUSTMENT	71
PCBORD VIEW	
TX-RX UNIT (X57-4860-XX) Component side view	85
TX-RX UNIT (X57-4860-XX) Foil side view	87
TX-RX UNIT (X57-4860-XX) Component side view + Foil side view	89
SCHEMATIC DIAGRAM	91
BLOCK DIAGRAM	95
LEVEL DIAGRAM	97
KNB-14 / KNB-15A (NI-Cd BATTERY)	98
SPECIFICATIONS	BACKCOVER

目录

概要	3
模式组合	5
为维修的拆卸	40
电路说明	43
IC数据	54
元件的说明	60
零件目录	62
外观	69
包装	70
调整	72
印刷线路板图	
TX-RX UNIT (X57-4860-XX) Component side view	85
TX-RX UNIT (X57-4860-XX) Foil side view	87
TX-RX UNIT (X57-4860-XX) Component side view + Foil side view	89
原理图	91
方框图	95
电平图	97
KNB-14 / KNB-15A (Ni-Cd BATTERY)	98
规格	99

GENERAL

	Destination	Frequency range	Remarks	QT/DQT	2-TONE	DTMF	Charger	Battery
TK-370	K	450 ~ 470 MHz	IF 1 45.05 MHz LOC 44.595 MHz	○	○	○	OP	OP
	K2	470 ~ 490 MHz	IF 1 45.05 MHz LOC 44.595 MHz	○	○	○	OP	OP
	K3	490 ~ 512 MHz	IF 1 46.35 MHz LOC 46.805 MHz	○	○	○	OP	OP
	K4	406 ~ 430 MHz	IF 1 45.05 MHz LOC 44.595 MHz	○	○	○	OP	OP
TK-378	M	450 ~ 470 MHz	IF 1 45.05 MHz LOC 44.595 MHz	QT	—	○	OP	OP
	M4	400 ~ 420 MHz	IF 1 46.35 MHz LOC 46.805 MHz	QT	—	○	OP	OP

NOTE : The K2, K3, and K4 types described in the manual conform to the tentative specification.

2-TONE is used for decoding only.

注意：使用说明书上列出的K2、K3和K4型为暂定规格。

两音仅适用于译码。

GENERAL/ 概要

INTRODUCTION

SCOPE OF THIS MANUAL

This manual is intended for use by experienced technicians familiar with similar types of commercial grade communications equipment. It contains all required service information for the equipment and is current as of the publication data. Changes which may occur after publication are covered by either Service Bulletins or Manual Revisions. These are issued as required.

ORDERING REPLACEMENT PARTS

When ordering replacement parts or equipment information, the full part identification number should be included. This applies to all parts: components, kits, or chassis. If the part number is not known, include the chassis or kit number of which it is a part, and a sufficient description of the required component for proper identification.

PERSONNEL SAFETY

The following precautions are recommended for personnel safety:

- DO NOT transmit until all RF connectors are verified secure and any open connectors are properly terminated.
- SHUT OFF and DO NOT operate this equipment near electrical blasting caps or in an explosive atmosphere.
- This equipment should be serviced by a qualified technician only.

SERVICE

This radio is designed for easy servicing. Refer to the schematic diagrams, printed circuit board views, and alignment procedures contained within.

NOTE

WE CANNOT guarantee oscillator stability when using channel element manufactured by other than KENWOOD or its authorized agents.

引言

本手册的范围

本手册是提供给熟悉专业通信设备并且具有维修经验的技术人员使用的。它包括了维修该设备所需要的全部资料和现行公布的数据。在出版后有可能发生变动, 将用《服务通报》或《手册修订本》进行补充。

替换零件的订购

当订购替换零件或设备信息时, 应注明完整的零件识别号码。所有的零件(元件、组件以及机壳)都有识别号码。如果不知道零件号码, 为了正确地识别, 必须写上此元件所属的机壳或组件的号码, 并且应对元件进行充分的说明。

个人安全

为了个人的安全, 请注意下列事项:

- 在没有认真地核实所有射频插头之前或有任何一个打开的插头没有连接到相应端子上的情况下, 均不要发射。
- 在电爆管附近, 或者, 在易爆性气体环境中, 必须关掉电源, 不可操作本设备。
- 本设备只应该由有资格的技术人员来维修。

服务

为便于本设备的维修, 建立了完整的服务体系, 有包括原理图、印刷线路板图和调整步骤在内的资料供参考。

注意

当使用“建伍”或它的指定厂家之外的公司所制造的波道元件时, 我们不能保证振荡器的稳定性。

REALIGNMENT

CONTROLS AND KEYS

① CHANNEL selector

Selects operating channels. Also used for selecting squelch level. If so programmed by your dealer, used for selecting channels to be locked out, or for selecting the QT frequencies so they may be changed.

② POWER/VOL control

Switches the transceiver ON or OFF. Also increases or decreases the transceiver volume.

③ LED indicator

Lights red while transmitting. Flashes red when the battery voltage level is low. Lights green when receiving a station. Flashes orange when receiving the correct signaling for Code Squelch, Selective Call, or 2-Tone (2-Tone: TK-370 only).

④ Display

⑤ SCN key

Used for controlling the Scan function.

⑥ DIAL key

Used for dialing a number with the Store and Send function, or used for storing, confirming, transmitting, or erasing numbers with the Auto-dial function.

⑦ TA key

Toggles the Talk-around function or the Reverse function ON or OFF.

⑧ LO key

Used for setting the transmit power.


⑨ DTMF keypad

Used for storing or transmitting DTMF numbers.

⑩ PTT (Push-to-Talk) switch

Switches the transceiver between receive and transmit modes.

GETTING ACQUAINTED

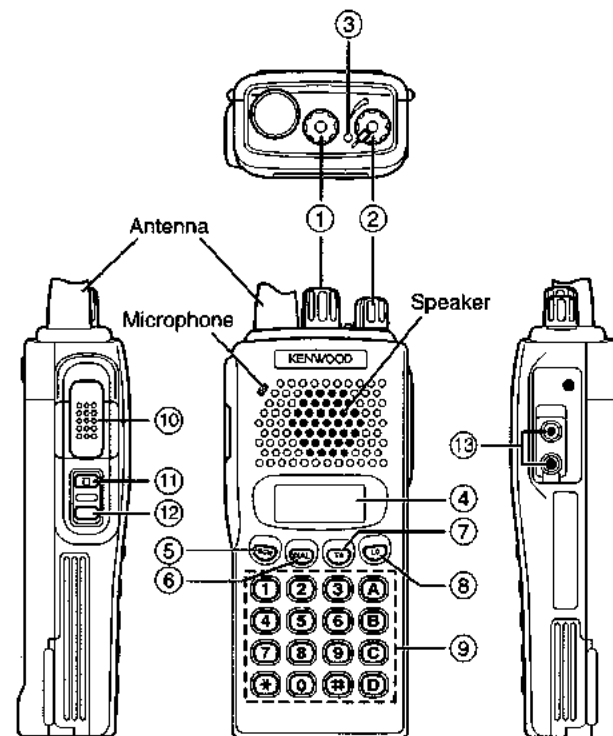

The transceiver is shown with the optional KNB-14 battery pack installed.

⑪ LAMP button

Toggles the Display illumination ON or OFF. The Display light goes OFF approximately 5 seconds after being switched ON.

Pressing any button or key except the LAMP button while the Display is illuminated restarts the 5 second timer. However, pressing the LAMP button switches OFF the light immediately.

⑫ MONI button

Press to monitor activity on your selected channel. Also used with QT, DQT, DTMF, or 2-Tone signaling to mute the speaker after these functions have opened squelch (DQT and 2-Tone: TK-370 only).

JACKS

⑬ Speaker-Microphone jacks

If desired, connect a speaker-microphone here.

模式组合

控制旋钮和功能键

① 信道选择旋钮 (CHANNEL)

选择工作信道，亦用于选择静噪电平。根据贵地经销店的编程设定，还可以用于选择要闭锁定的信道或选择 CTCSS (QT) 的频率。

② 电源/音量调节旋钮 (POWER/VOL)

接通或断开通信机的电源。也用于增大或减小通信机的接收音量。

③ 状态指示灯 (LED)

发射期间红色灯亮。电池电压变低到临界电平时红色灯闪烁。接收其它电台信号时绿色灯亮。在使用编码静噪、信息选呼或两音静噪的情况下，接收到正确信号而静噪打开时橙色灯闪烁。(两音信令：仅适用于TK-370型)

④ 显示屏

⑤ 扫描键 (SCN)

用以控制扫描功能。

⑥ 拨号键 (DIAL)

在使用存储-发送功能时，用以发出编码，或在使用编位拨号功能时，用以存储、确认、发射或清除编码。

⑦ 脱网通信键 (TA)

启动或退出脱网通信功能或倒频功能。

⑧ 低功率键 (LO)

用以选择发射功率。


⑨ 双音多频键盘 (DTMF)

用以存储输入或发出双音多频 (DTMF) 号码。

⑩ 按-讲键 (PTT)

用以转换通信机的发射和接收。

熟悉各部件

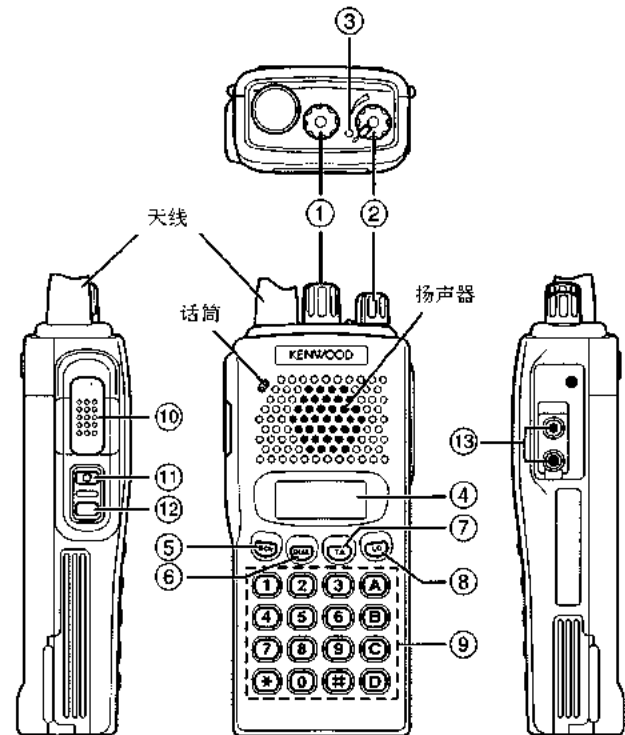

装有KNB-14电池(选件)的KNB-14的示意图

⑪ 照明键 (LAMP)

接通或关闭显示屏的照明。照明灯点亮约 5 秒钟后自动熄灭。

在显示屏被照明期间按下除 (LAMP) 键以外的任何键, 5 秒钟定时器便重新进行计时。但是一按 (LAMP) 键便会立即关掉照明灯。

⑫ 监听键 (MONI)

按此键可以监听所选择信道上的情况。在使用 CTCSS (QT)、亚音数码静噪 (DQT)、DTMF 或两音静噪功能的情况下，静噪打开后，也可以用此键立即关闭静噪 (DQT 和两音信令：仅适用于TK-370型)。


插孔

⑬ 扬声器-话筒插孔

如果需要，连接外部扬声器-话筒于此处。


REALIGNMENT/模式组合


DISPLAY 显示屏

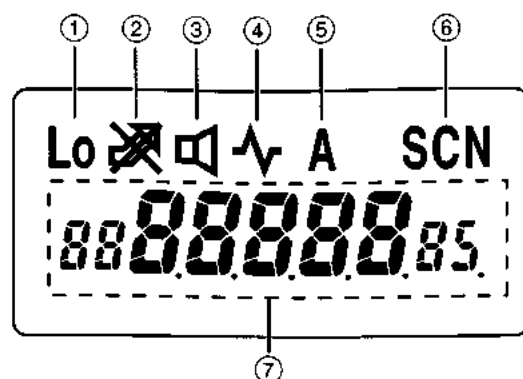

① **Lo**
Appears when the Low Power function is selected.

② 
Appears when the selected channel is busy.

③ 
Appears when QT, DQT, DTMF, or 2-Tone decoding is deactivated by pressing the MONI button (DQT and 2-Tone: TK-370 only)


④ 
Appears when the squelch is opened by pressing the MONI button.


⑤ **A**
Appears when the selected channel is assigned to the scan list. The Scan function only scans the channels on the scan list.


⑥ **SCN**
Visible while scanning.

⑦ **8888888.85**
Displays the selected channel or squelch level. Also displays DTMF digits as they are programmed, confirmed, or transmitted. Messages received via Selective Call also are displayed here.

① **Lo**
当选择了低功率状态时出现。

② 
当所选择的信道被占用(繁忙)时出现。

③ 
通过按 [MONI] 键使QT、DQT、DTMF或两音静噪无效时出现(DQT和两音信令: 仅适用于TK-370型)

④ 
通过按下 [MONI] 键使静噪打开时出现。

⑤ **A**
当所选择的信道是在可扫描信道序列中时出现。扫描功能只扫描可扫描信道序列中的信道。

⑥ **SCN**
扫描中出现。

⑦ **8888888.85**
显示所选择的信道号码或静噪电平代码。当编程、确认或发射时, 也显示DTMF数字。在信息选呼时, 所接收到的信息也显示在此处。


REALIGNMENT/模式组合

1. TRANSCEIVER MODES

Select the function you want from among the four modes and make the necessary settings.

1. 通信机的工作模式

通信机的工作参数和所需要的功能分别在以下的4个模式中
式中选择设定。

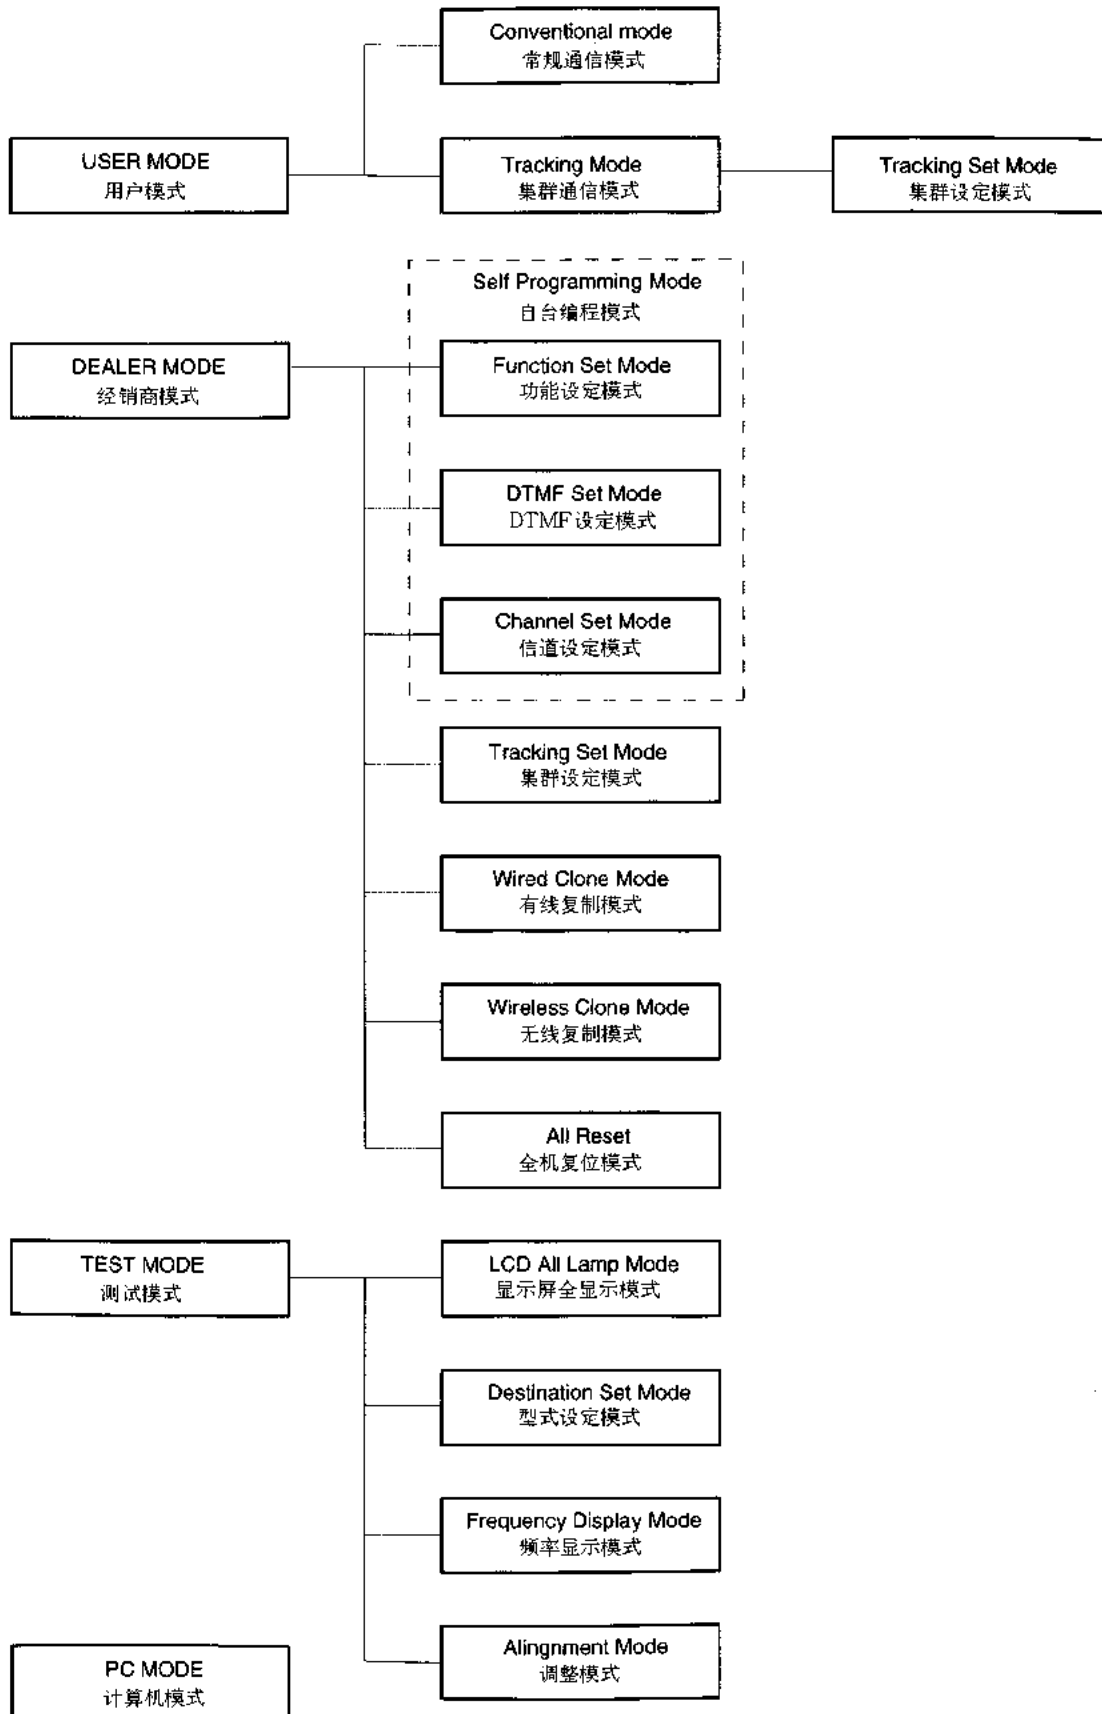

REALIGNMENT

2. DESCRIPTION OF MODE FUNCTIONS

Note : The SmarTrunk II™ call is a registered trademark of the Selectone Corporation.

MODE		FUNCTION
USER MODE		This mode is used for routine operation.
CONVENTIONAL MODE		This mode is for use as a transceiver.
TRUNKING MODE		This mode is used when a tracking board has been installed. (board model: board model ST-865KW2)
DEALER MODE		This mode is used by the dealer for making settings for the modes listed below. Function set mode, DTMF set mode, Channel set mode, Trunking set mode, Wired clone mode, Wireless clone mode, All Reset
Self Programming (FUNCTION SET MODE)		This mode is used by the dealer for making ON/OFF settings of each transceiver function according to the user operating needs. 1.Monitor 2.Scan 3.Disable 4.Talk Around 5.Low 6.Priority 7.Priority CH 8.Look Back A 9.Look Back B 10.Revert CH 11.TX Dwell Time 12.Dropout Delay Time 13.Time out Timer 14.Transmit Warning 15.TOT Rekey Time 16.TOT Reset Time 17.Squelch Level 18.Beep 19.Signalling 20.Battery Save 21. Selectable QT 22.DELETE/ADD 23.Dealer Mode - Test Mode ENABLE
Self Programming (DTMF SET MODE)		This mode is used by the dealer for making DTMF ON/OFF settings of each transceiver function according to the user operating needs. 24.Digit Time 25.Interdigit Time 26.First Digit Time 27.Rise Time 28.Rise Time With QT 29.PTT ID 30.Dial ID 31.connect ID 32. Disconnect ID 33.NO. of DTMF key 34.DTMF Hold Time 35.Store & Send 36.D key Assignment 37.DTMF Signalling 38.Intermediate Code 39.Group Code 40.Auto Reset Time 41.Call Alert/Transpond 42.Clrer to Transpond
Self Programming (CHANNEL SET MODE)		This mode is used by the dealer for setting channel frequencies and signaling according to the user operating needs without using the FPU. 1.Channel Selection 2.RX Frequency 3.RX Signaling 4.TX Frequency 5.TX Signaling 6.2-Tone/DTMF (TK-370) TK-378 is DTMF only 7.PTT ID Enable 8.Scan DEL/ADD 9.Busy Channel Lockout 10.Clock Frequency Shift 11.TX Power 12.ID Code (DTMF)
TRUNKING SET MODE		This mode sets operations involving the SmarTrunk II™.
WIRED CLONE MODE		This mode copies data settings from one transceiver to another by means of an interface cable.
WIRELESS CLONE MODE		This mode copies data settings from one transceiver to another without cables by means of the DTMF signal.
ALL RESET		This mode resets transmit/receive frequencies for each channel and the function settings.
TEST MODE	ALL LCD MODE	This mode lights up all the LCD segments to check them.
	DESTINATION SET MODE	This mode sets the transceiver destination.
	FREQUENCY DISPLAY MODE	This mode is for checking the frequencies and service work.
	ALIGNMENT MODE	This mode is for alignment of transceiver operation.
PC MODE		This mode is used for making settings by operating the FPU connected to the RS-232C port.

模式组合

2. 各模式的功能说明

注) Smar Trunk II™ 是 SELECTONE 公司注册的商标。

模 式	功能简要说明
用户模式	通常使用的模式
常规通信模式	作为普通通信机使用的模式
集群通信模式	安装集群逻辑板后使用的模式(逻辑板型号: ST 865KW2)
经销商模式	经销商进行各项设定的模式 (功能设定模式)(DTMF 设定模式)(信道设定模式)(集群设定模式) (有线复制模式)(无线复制模式)(全机复位模式)
自台编程 (功能设定模式)	经销商根据用户的使用条件, 设定通信机各项功能的有/无 1. 监听 2. 扫描 3. (DIAL) 键 4. 脱网 5. (LO) 键 6. 优先信道 7. 优先信道选择 8. 回扫周期 A 9. 回扫周期 B 10. 恢复信道选择 11. 发射扫描暂停时间 12. 停留时间 13. 发射定时 14. 发射警告 15. TOT 恢复时间 16. TOT 复位时间 17. 静音电平 18. “嘟嘟”音 19. 信令控制关系 20. 电池省电 21. 可变音频 CTCSS 22. 删除/追加 23. 经销商模式和测试模式开放
自台编程 (DTMF 设定模式)	经销商根据用户的使用条件设定通信机的各项 DTMF 功能的有/无 24. 号码宽度 25. 码间间隔 26. 首位号码宽度 27. 号码发射延迟时间 28. 有 CTCSS 功能时的号码发射延迟时间 29. ANI 号码发射时机 30. 电话密码 31. 上线码 32. 下线码 33. DTMF 键盘制式 34. 号码发射保留时间 35. 输入-发出 36. (D) 键空码设定 37. DTMF 功能选择 38. 中间号码选择 39. 组呼“无码”选择 40. 静音自动关闭时间 41. 被呼提示/自动应答 42. 加强自动应答
自台编程 (信道设定模式)	经销商根据用户的使用条件, 不用外部编程器而设定通信机的信道频率和删除/追加等参数。 1. 信道选择 2. 接收频率 3. 接收信令 4. 发射频率 5. 发射信令 6. 语音信令/DTMF 信令 (TK-370) TK-378 仅适用于 DTMF 7. ANI 功能 8. 删除/追加选择 9. 禁发功能 10. 时钟拍频频率偏移 11. 发射功率 12. 自台号码
集群设定模式	设定 SmarTrunk II™ 系统参数的模式
有线复制模式	用接口电缆把已设定的通信机中的数据传送到其它未设定的通信机中
无线复制模式	用 DTMF 信号以无线方式把已设定的通信机中的数据传送到其它未设定的通信机中
全机复位模式	把各个信道的发射/接收频率以及功能设定等参数全部初始化
测试模式	显示屏全显示模式: 显示屏上所有的字段和标志都显示出来以确认显示屏的模式
	型式设定模式: 设定通信机型式的模式
	频率显示模式: 用于确认频率和进行修理
	调整模式: 对通信机进行调整的模式
计算机模式	使用外部写频器(计算机)通过 RS-232C 接口对通信机进行各种设定的模式

模式组合

3. 进入各模式的键盘操作方法


模 式	键 操 作	备 注
用户模式	常规通信模式/ 集群通信模式	接通电源
	集群设定模式	按住〔#〕键, 同时接通电源
经销商模式	功能设定模式	同时按住〔LAMP〕和〔DIAL〕键, 接通电源(2秒钟后)
	DTMF 设定模式	同 上
	信道设定模式	同 上
	集群设定模式	同 上
	有线复制模式	同 上
	无线复制模式	同 上
	全机复位模式	同 上
测试模式	显示屏全显示模式	同时按住〔LAMP〕和〔TA〕键, 接通电源(2秒钟后)
	型式设定模式	同 上
	调整模式	同 上

4. 自台编程功能的封闭

●本机可以编程封闭经销商模式和测试模式, 以防止使用者利用自台编程功能以及外部写频器自行修改参数或由此产生的误动作。

●解除封闭的方法: 暂时把经销商模式/测试模式进入控制点短路同时接通电源即可解除对经销商模式/测试模式的封闭。(请参看附图)

用外部写频器(计算机)也可以解除对经销商模式/测试模式的封闭。

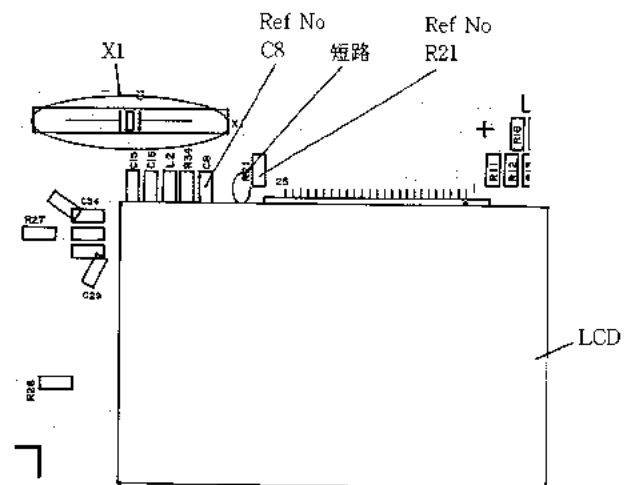


RX-TX单元 (焊接面)


REALIGNMENT

5. SELF PROGRAMMING FLOW CHART


FUNCTION SET MODE

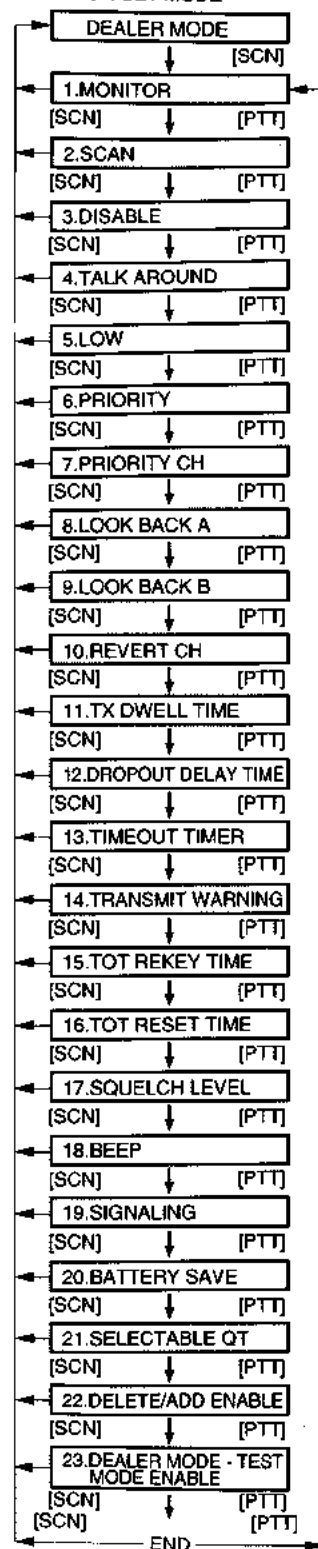

DTMF SET MODE

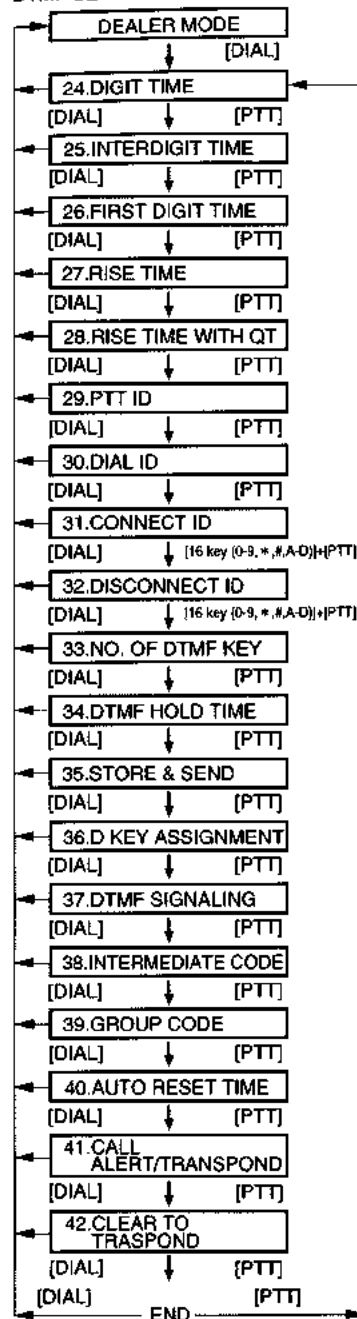


CHANNEL SET MODE

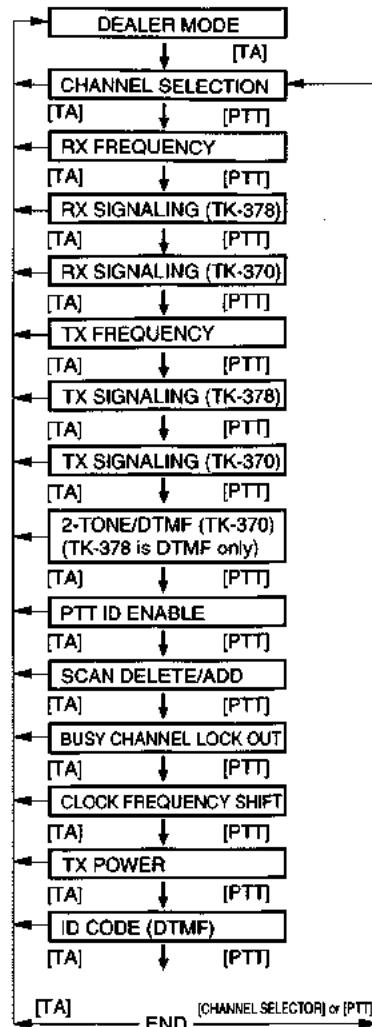

模式组合

5. 自台编程功能的流程图

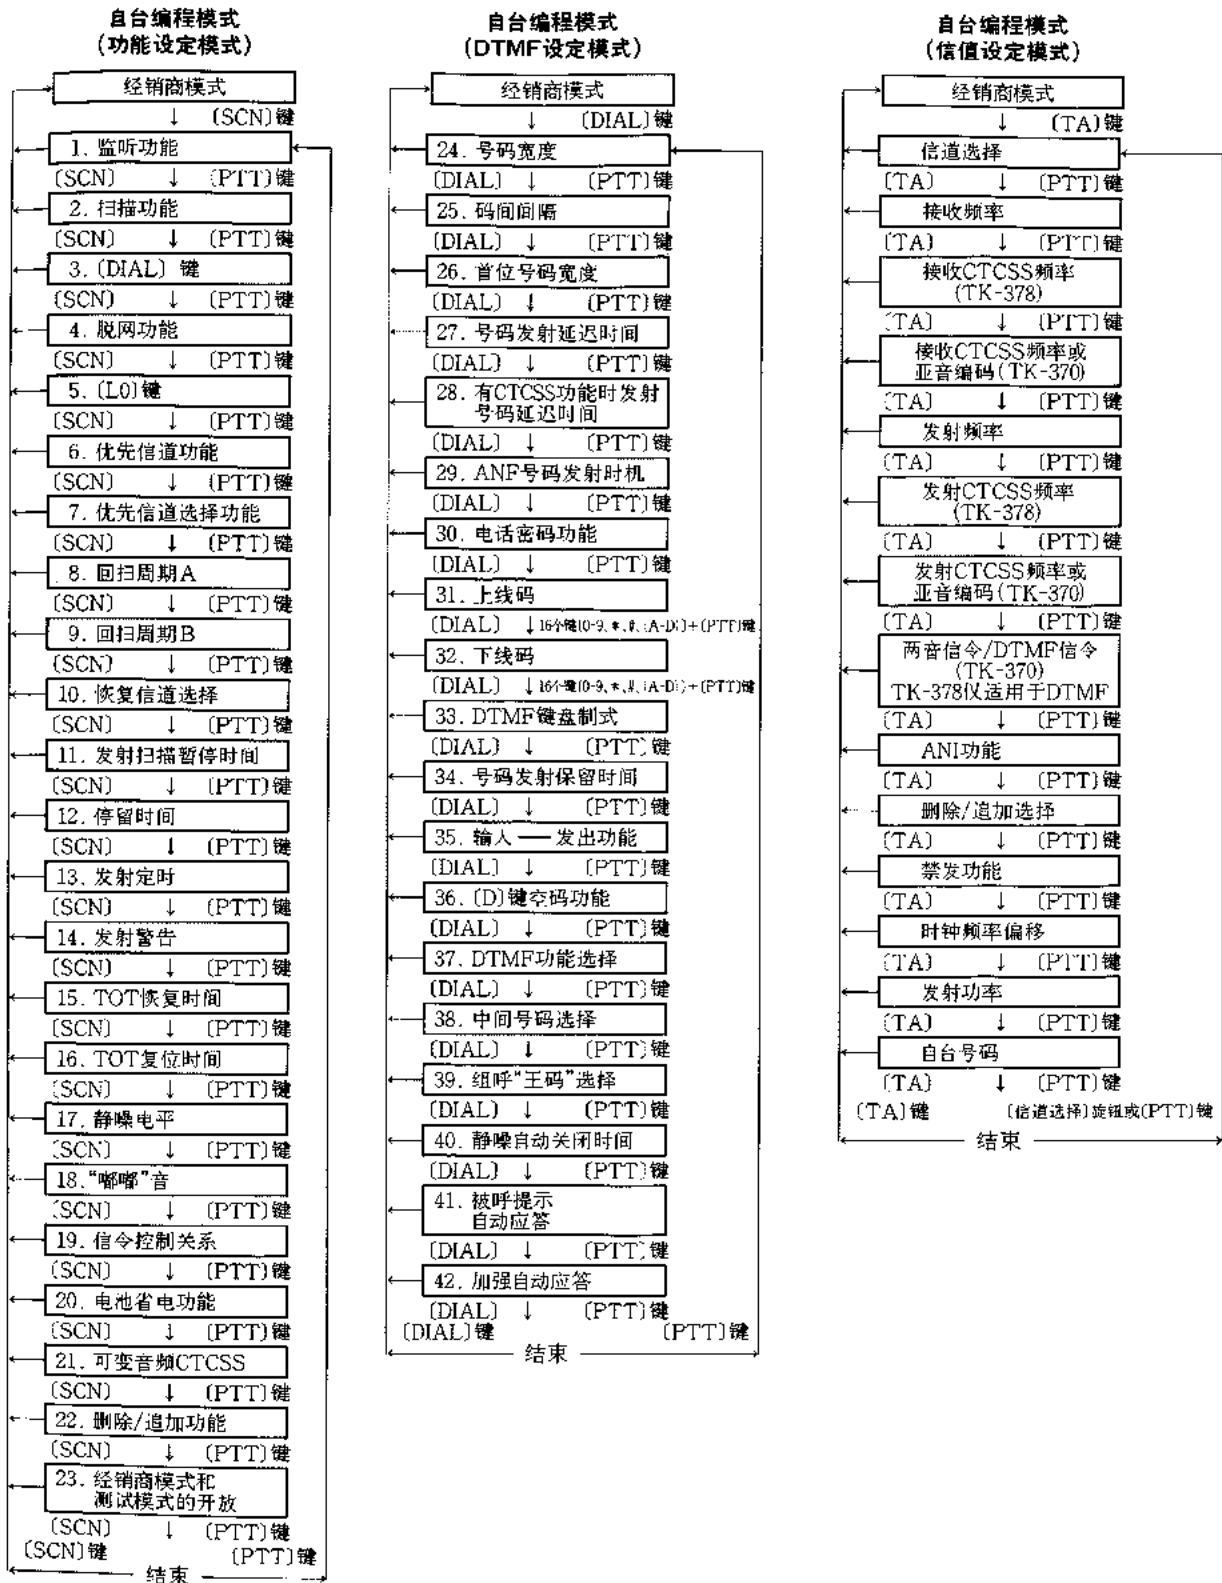

REALIGNMENT

6. DEALER MODE

6-1 Self Programming (Function Setting)

Operation

1. Set in Dealer Mode after first turning POWER ON by simultaneously pressing the [LAMP] and [DIAL] keys (takes about 2 seconds).

Note : Refer to the notice (on page 20) in the self-programming mode.



Dealer Mode

2. Press [SCN] while in Dealer Mode, to enter function Set Mode.
3. In "Channel Selector" turn functions ON and OFF or select settings.
4. Store the value by pressing [PTT] and move to the next function.
5. Press [SCN] to return to Dealer Mode. Data shown on the display at this point will not be stored in the memory.
6. During function setting a "Beep Op. Tone" sounds each time you store information on the display by pressing [PTT].
7. The message "END" is displayed when function setting is complete.

Function No.	Function Name	Setting (Defaults are underlined)	Display	Remarks
1	MONITOR	OFF	1 OFF	No operation
		Monitor Momentary	1 1	Temporarily cuts off Signaling. Works only when button held down.
		Monitor Lock	1 2	Temporarily cuts off Signaling. Switches each time button is pressed.
		SQ OFF Momentary	1 3	Squelch opens while button is held down.
2	SCAN	OFF	2 OFF	No operation
		<u>CO</u>	2 CO	"Carrier Operate" function
		TO	2 TO	"Time Operate" function
3	DISABLE	Disable	3 OFF	Disables the [DIAL] key.
		<u>Enable</u>	3 ON	Enables the [DIAL] key.
4	TALK AROUND	OFF	4 OFF	No operation
		<u>Talk Around</u>	4 tA	"Talk Around" function
		Reverse	4 rE	"Reverse" function
5	LOW	Disable	5 OFF	Disables the [LO] key.
		<u>Enable</u>	5 ON	Enables the [LO] key.
6	PRIORITY	OFF	6 OFF	No priority settings
		Fixed	6 1	Fixed priority channel
		Selected	6 2	Variable priority channel
7	PRIORITY CHANNEL	1 ~ 32 <u>1</u>	7 1	Priority channel
			7 32	Only "Fixed Priority" enabled
8	LOOK BACK A	0.3s ~ 1.5s <u>0.5s</u> (0.1s / 1STEP)	8 0.3	The period priority channel that checks priority channel is not busy while normal channel stops during priority scan.
			8 1.5	
9	LOOK BACK B	0.5s ~ 5.0s <u>2.0s</u> (0.5s / 1STEP)	9 0.5	The period priority channel that checks priority channel is busy for inconsistent signaling while normal channel stops during priority scan.
			9 5.0	
10	REVERT CHANNEL	<u>Selected</u>	10 1	Channel when scan starts.
		Last Call	10 2	Newest channel at pause in scan. Channel where scan is stopped. Channel at start of scan when not stopped at all.

模式组合

6. 经销商模式

6-1 自台编程(功能设定)

操作

1. 同时按住〔LAMP〕和〔DIAL〕键,接通电源,2秒钟后进入经销商模式。

注: 请参照自编程序模式时的注意事项(第21页)。



经销商模式

- 在经销商模式中, 按〔SCN〕键进入功能设定模式。
- 用信道选择旋钮选择功能的有效/无效或设定值。
- 选择设定之后, 按〔PTT〕键, 设定值存入存储器, 菜单转到下一项。
- 一按〔SCN〕键, 立即从当前项目返回到经销商模式, 当时所显示的项目内容也不被存储。
- 对于各功能的设定, 一按〔PTT〕键, 所显示的内容就被存储, 此时可以听到确认键操作有效的“嘟——”音。
- 所有的项目设定完成后, 显示“End”。

功能号码	功能名称	选择设定值(有底线的为初始值)	显示	备 注
1	监听功能	无	1 OFF	监听功能无效
		暂态无条件监听	1 1	按住〔MONI〕键期间打开信令静噪, 监听信道情况。
		稳态无条件监听	1 2	按一下〔MONI〕键, 信令静噪打开, 直到再按一下〔MONI〕键, 循环切换。
		暂态有条件监听	1 3	按住〔MONI〕键期间, 噪声静噪打开。
2	扫描功能	无	2 OFF	扫描功能无效
		CO	2 CO	载波控制扫描
		TO	2 tO	时间控制扫描
3	〔DIAL〕	无效	3 OFF	使〔DIAL〕键无效
		有效	3 ON	使〔DIAL〕键有效
4	脱网功能	无	4 OFF	此项功能无效
		脱网功能	4 tA	脱网功能有效
		倒频功能	4 rE	倒频功能有效
5	〔LO〕	无效	5 OFF	〔LO〕键无效
		有效	5 ON	〔LO〕键有效
6	优先信道	无	6 OFF	没有优先信道
		固定	6 1	固定优先信道
		可选择	6 2	可变优先信道
7	优先信道选择	1~32 <u>1</u>	7 1	优先信道(只在固定优先信道时有效)
			7 32	
8★	回扫周期 A	0.3~1.5秒 <u>0.5秒</u> (步进值: 0.1秒)	8 0.3	在优先扫描时而标准信道停止期间, 检查优先信道的周期优先信道没有占线时
			8 1.5	
9	回扫周期 B	0.5~5.0秒 <u>2.0秒</u> (步进值: 0.5秒)	9 0.5	在优先扫描时面标准信道停止期间, 检查优先信道的周期优先信道占线而信号不一致
			9 5.0	
10	恢复信道选择	选择设定信道	10 1	扫描开始时的信道。
		最后接收呼叫信道	10 2	在扫描进行中, 为最近一次停留的信道。在扫描停留期间, 为正停留的信道。 如果一次也未停留过, 则为扫描开始的信道。

REALIGNMENT

Function No.	Function Name	Setting (Defaults are underlined)	Display	Remarks
10	REVERT CHANNEL	Last Used	10 3	Last channel transmitted during scan. Channel where scan is stopped. Channel at start of scan when not stopped at all.
		Selected + Talk Back	10 4	Channel where scan was started during scan. Channel where scan/channel is stopped.
		Priority	10 5	Priority channel
		Priority + Talk Back	10 6	Priority channel during scan. Channel where scan is stopped.
11	TX DWELL TIME	0.5s ~ 5.0s <u>3.0s</u>	11 0.5	Time until scan restarts when it stops by transmission.
		(0.5s / 1STEP)	11 5.0	
12	DROPOUT DELAY TIME	0.5s ~ 5.0s <u>3.0s</u>	12 0.5	Time until scan restarts when it stops by signal input.
		(0.5s / 1STEP)	12 5.0	
13	TIME OUT TIMER	OFF, 30s ~ 300s <u>60s</u>	13 OFF	Transmit halted for 10 minutes to save power module.
		(30s / 1STEP)	13 30	Time from transmit start until transmit stop.
			13 300	
14	TRANSMIT WARNING	OFF, 10s ~ 250s <u>OFF</u>	14 OFF	No warning tone
		(10s / 1STEP)	14 10	Time from transmit start until warning tone is issued.
			14 250	
15	TOT REKEY TIME	OFF 1s ~ 60s <u>OFF</u>	15 OFF	Time until transmit is allowed after returning to receive by TOT.
		(1s / 1STEP)	15 1	Transmit prohibited until preset time elapses.
			15 60	
16	TOT RESET TIME	OFF, 1s ~ 15s <u>OFF</u>	16 OFF	TOT is immediately reset after transmit stops.
		(1s / 1STEP)	16 1	TOT count won't reset until preset time elapses, even if transmit is stopped.
			16 15	
17	SQUELCH LEVEL	0 ~ 9 <u>5</u>	17 0	Squelch is set higher (tighter), as the figure increases.
		(1 / 1STEP)	17 9	
18	BEEP	NO	18 OFF	No beep tone
		<u>YES</u>	18 ON	Beep tone sounds
19	SIGNALING	<u>AND</u>	19 And	Squelch opens when both match.
		OR	19 Or	Squelch opens when either matches.
20	BATTERY SAVE	Disable	20 OFF	No Battery Save function.
		<u>Enable</u>	20 ON	Battery Save function.
21	SELECTABLE QT	Disable	21 OFF	Prohibit Selectable QT
		<u>Enable</u>	21 ON	Permit Selectable QT
22	DELETE / ADD ENABLE	Disable	22 OFF	Prohibit Delete/Add
		<u>Enable</u>	22 ON	Permit Delete/Add
23	DEALER MODE - TEST MODE ENABLE	Disable	23 OFF	Prohibit shift between modes
		<u>Enable</u>	23 ON	Permit shift between modes
END			End	

Press [PTT] to return again to Function Setting when "END" is displayed.

Note : While scanning, if a scan function stops at a non-priority channel, the status of the Priority channel will be checked periodically. The time interval for this checking is as follows:

A When there is no receive signal on the Priority channel.

B When there is a receive signal on the Priority channel, however the signaling is different.

模式组合

功能号码	功能名称	选择设定值(有底线的为初始值)	显 示	备 注
10	恢复信道选择	最后使用信道	10 3	在扫描进行中, 为最近一次发射的信道。在扫描停留期间, 为正停留的信道。
		选择设定信道 + 当前通信信道	10 4	如果一次也未发射过, 则为扫描开始的信道。
		优先信道	10 5	在扫描进行中, 为扫描开始的信道; 在扫描停留期间, 为正停留的信道。
		优先信道 + 当前通信信道	10 6	优先信道
11	扫描发射暂停时间	0.5~5.0秒 <u>3.0秒</u>	11 0.5	因发射而扫描停止时, 直至扫描重新启动为止的时间
		(步进值: 0.5秒)	11 5.0	
12	停留时间	0.5~5.0秒 <u>3.0秒</u>	12 0.5	因信号输入而扫描停止时, 直至扫描重新启动为止的时间
		(步进值: 0.5秒)	12 5.0	
13	发射定时(TOT)	OFF, 30~300秒 <u>60秒</u>	13 OFF	最大连续发射时间。 为保护功率放大器, OFF时, 为10分钟
		(步进值: 30秒)	13 30	
			13 300	
14	发射限时警告	OFF, 10~250秒 <u>OFF</u>	14 OFF	无警告音
		(步进值: 10秒)	14 10	发射开始后到发出警告音的时间
			14 250	
15	TOT恢复时间	OFF, 1~60秒 <u>OFF</u>	15 OFF	发射定时器强制通信机回到接收状态, 松开(PTT)键马上再按(PTT)键, 可以立即再进入发射状态。
		(步进值: 1秒)	15 1	发射定时器强制通信机回到接收状态, 在设定的时间内, 通信机无法进入发射状态
			15 60	
16	TOT复位时间	OFF, 1~15秒 <u>OFF</u>	16 OFF	一停止发射, 发射定时器立即复位, 准备重新计时。
		(步进值: 1秒)	16 1	即使停止发射, 未经过设定的时间, 发射定时器也不复位。
			16 15	
17	静噪电平	0~9 <u>5</u>	17 0	数值越大, 静噪越深
		(步进值: 1秒)	17 9	
18	“嘟嘟”音	无	18 OFF	没有“嘟嘟”音功能
		有	18 ON	有“嘟嘟”音功能
19	信令控制关系	AND(“与”逻辑)	19 And	当采用两个信令控制时, 双方都满足时静噪才打开
		OR(“或”逻辑)	19 Or	当采用两个信令控制时, 双方中有一方满足, 静噪就打开
20	电池省电功能	无效	20 OFF	电池省电功能无效
		有效	20 ON	电池省电功能有效
21	可变音频CTCSS功能	无效	21 OFF	可变音频CTCSS功能无效
		有效	21 ON	可变音频CTCSS功能有效
22	删除/追加功能	无效	22 OFF	不能对扫描信道序列进行删除/追加
		有效	22 ON	可以对扫描信道序列进行删除/追加
23	经销商模式和测试模式 开放	无效	23 OFF	封闭经销商模式和测试模式, 不能进入
		有效	23 ON	开放经销商模式和测试模式, 可以进入
结束			End	

显示“End”后, 一按(PTT)键就回到功能设定模式

★注: 回扫周期: 选择扫描在一个普通信道上停留时, 返回检测优先信道的时间间隔。

A 表示优先信道上无信号时的回扫周期。

B 表示优先信道上无信号但信令不符合时的回扫周期。

REALIGNMENT

6-2 Self Programming (setting DTMF)

Operation

1. Set in Dealer Mode after first turning Power ON by simultaneously pressing the [LAMP] and [DIAL] keys (takes about 2 seconds).



Dealer Mode

2. Press [DIAL] while in Dealer Mode, to enter DTMF Set Mode.
3. Make DTMF function ON/OFF or select settings with [Channel Selector] and the 16 keys (0 to 9, * # A to D).

4. Store the selected values or functions 31 and 32 with the 16 keys and other items with the [PTT] switch then move on to the next function.
5. Press [DIAL] key if you wish to return to Dealer Mode. Information shown on the display at this time will not be stored in the memory.
6. During each function setting a "Beep Op. Tone" sounds each time you store information from the display by pressing [PTT].
7. The message "END" is displayed when all DTMF function setting is complete.
8. You can check each setting of each item in sequence, by pressing [MONI] from [Channel Selector].

Function No.	Function Name	Setting (Defaults are underlined)	Display	Remarks
24	DIGIT TIME	50ms ~ 200ms <u>50ms</u> (10ms / 1STEP)	24 50	Code 1 digit time during DTMF auto transmit.
			24 200	
25	INTER DIGIT TIME	50ms ~ 200ms <u>50ms</u> (10ms / 1STEP)	25 50	Interval time between codes during DTMF auto transmit.
			25 200	
26	FIRST DIGIT TIME	50ms ~ 200ms <u>50ms</u> (10ms / 1STEP)	26 50	Digit time for 1 code during DTMF auto transmit.
			26 200	
27	RISE TIME	100ms ~ 1000ms <u>100ms</u> (50ms / 1STEP)	27 100	Set time
			27 1000	
28	RISE TIME WITH QT	100ms ~ 1000ms <u>100ms</u> (50ms / 1STEP)	28 100	Set time
			28 1000	
29	PTT ID	<u>OFF</u>	29 OFF	No sending of PTT ID.
		Connect	29 1	Send CONNECT ID when [PTT] switch is held down.
		Disconnect	29 2	Send CONNECT ID when [PTT] switch is released.
		Both	29 3	Send both CONNECT and DISCONNECT.
30	DIAL ID	<u>OFF</u>	30 OFF	Prohibit Dial ID
		ON	30 ON	Permit Dial ID
31	CONNECT ID	<u>Blank</u> 0 x 1 ~ # x 16	31 - - - -	CONNECT ID CODE not set
			31 0	CONNECT ID CODE
			31 F F F F	
32	DISCONNECT ID	<u>Blank</u> 0 x 1 ~ # x 16	32 - - - -	DISCONNECT ID CODE not set.
			32 0	DISCONNECT ID CODE
			32 F F F F	
33	NO. OF DTMF KEY	<u>12keys</u> (0 ~ 9, *, #) 16keys (0 ~ 9, *, #, A ~ D)	33 12	Disable [A] [B] [C] [D] keys.
			33 16	Enable [A] [B] [C] [D] keys.
34	DTMF HOLD TIME	Disable	34 OFF	Do not Hold
		<u>Enable</u>	34 ON	Hold
35	STORE & SEND	<u>OFF</u>	35 OFF	Prohibit Store & Send function.
		ON	35 ON	Permit Store & Send function.
36	D KEY ASSIGNMENT	<u>D Code</u>	36 d	Send the code for D.
		1s ~ 16s	36 1	Make unmodulated transmission for preset time.
		(1s / 1STEP)	36 16	

模式组合

6-2 自台编程(DTMF设定)

操作:

1. 同时按住〔LAMP〕和〔DIAL〕键,接通电源,2秒钟后进入经销商模式。



经销商模式

2. 在经销商模式中,按〔DIAL〕键,进入“DTMF设定模式”。
3. 使用信道选择旋钮以及16制式的键盘〔0~9、*、#、A~D〕选择DTMF功能的有效/无效或设定值。

4. 各项的选择设定,除了第31、32项是用16制式键盘输入设定外,其余的都是通过按〔PTT〕键存储设定内容,并且菜单转到下一项。
5. 一按〔DIAL〕键,立即从当前项目返回到“经销商设定模式”,当时所显示的内容也不会被存储。
6. 对于各功能的设定,一按〔PTT〕键,所显示的内容就被存储,此时可以听到确认键操作有效的“嘟—”音。
7. 所有的DTMF功能设定完成后,显示〔End〕。
8. 按〔MOND〕键,旋转信道选择旋钮可以依次确认各项的设定值。

功能号码	功能名称	选择设定值(有底线的为初始值)	显示	备 注
24	号码宽度	50~200毫秒	24 50	发射DTMF号码时,每一位号码的发射时间
		(步进值:10毫秒) <u>50毫秒</u>	24 200	
25	码间间隔	50~200毫秒	25 50	发射DTMF号码时,每一位号码之间的时间间隔
		(步进值:10毫秒) <u>50毫秒</u>	25 200	
26	首位号码宽度	50~200毫秒	26 50	发射DTMF号码时,首位号码的发射时间
		(步进值:10毫秒) <u>50毫秒</u>	26 200	
27	号码发射延迟时间	100~1000毫秒	27 100	设定时间 注:在使用电池省电功能以及有CTCSS功能时使用DTMF功能,发射延迟时间应设定300毫秒以上
		(步进值:50毫秒) <u>100毫秒</u>	27 1000	
28	有CTCSS功能时 号码发射延迟时间	100~1000毫秒	28 100	设定时间
		(步进值:50毫秒) <u>100毫秒</u>	28 1000	
29	ANI功能	无	29 OFF	不发ANI号码
		上线	29 1	一按〔PTT〕键,发出ANI号码
		下线	29 2	一松开〔PTT〕键,发出ANI号码
		双线	29 3	按下和松开〔PTT〕键时各发出一次ANI号码
30	电话密码功能	无	30 OFF	此功能无效
		有	30 ON	此功能有效
31	上线号码	空位	31 - - - - -	未设置上线号
		0×1位~#×16位	31 0	上线号码
			31 F F F F F	
32	下线号码	空位	32 - - - - -	未设置下线号码
		0×1位~#×16位	32 0	下线号码
			32 F F F F F	
33	DTMF键盘制式	12键(0~9、*、#)	33 12	〔A〕〔B〕〔C〕〔D〕键无效
		16键(0~9、*、#、A~D)	33 16	〔A〕〔B〕〔C〕〔D〕键有效
34	号码发射保留时间	无效	34 OFF	不保留 在手动拨号时,即使从按键放开手也
		有效	34 ON	保留 继续进行2秒钟发射的功能
35	输入-发出功能	无	35 OFF	输入-发出功能无效
		有	35 ON	输入-发出功能有效
36	〔D〕键空码功能	“D”号码	36 D	发出D音频
		1~16秒	36 1	在设定时间内发出无调制信号,起延迟时间的作用
		(步进值:1秒)	36 16	

REALIGNMENT

Function No.	Function Name	Setting (Defaults are underlined)	Display	Remarks	
37	DTMF SIGNALING	<u>OFF</u>	37 OFF	No DTMF signaling.	
		Code SQ	37 1	Code Squelch.	
		SEL CALL	37 2	Selective Call	
38	INTERMEDIATE CODE	0 ~ 9	38 0	Selected code is set as intermediate code.	
			38 9		
		A ~ D	38 A		
			38 d		
		*	38 E		
		#	38 F		
39	GROUP CODE	<u>OFF</u>	39 OFF	No group code	
		A ~ D	39 A	Selected code is set as group code.	
			39 d		
		*	39 E		
		#	39 F		
40	AUTO RESET TIME	OFF	40 OFF	Do not perform Auto Reset.	Time until coincidence state is canceled after DTMF signaling coincides.
		1s ~ 15s <u>10s</u>	40 1	Auto Reset is performed for preset time.	
		(1s / 1STEP)	40 15		
41	CALL ALERT / TRANSPOND	<u>OFF</u>	41 OFF	No operation	
		Call Alert	41 1	The Call Alert tone sounds.	
		TRANSPOND (Cali Alert)	41 2	Transpond of Call Alert.	
		TRANSPOND (ID Code)	41 3	Transpond of ID Code.	
		TRANSPOND (Transpond Code)	41 4	Transpond of code set in Auto Dial 0.	
42	CLEAR TO TRANSPOND	<u>NO</u>	42 OFF	Disable Clear to Transpond.	Function that waits for transpond until busy signal disappears.
		YES	42 ON	Enable Clear to Transpond.	
END			End		

Returns to setting of "24. DIGIT TIME" after "END" display, when [PTT] is pressed.

Note : When changing and storing the setting for "DTMF SIGNALING" of function No. 37, the ID CODE settings for all channels are reset to "000".

• Notice in self-programming mode

For the setting by self-programming, the basic function is set to OFF as combined in the table below. Therefore, the setting is possible, but the operation is disabled.

Function name	Setting	Disable conditions
2TONE/DTMF	DTMF	37. DTMF signaling is OFF.
2. [SCN]	TO	7. Priority is fixed or selected.
6. Priority	Fixed, Selected	2. [SCN] is OFF.
7. Priority CH		6. Priority is OFF or fixed.
8. Look Back A		6. Priority is OFF.
9. Look Back B		6. Priority is OFF.
10. Revert CH	Priority, Priority+Selected	6. Priority is OFF.
11. Dwell Time		2. [SCN] is OFF.
12. Dropout Delay Time		2. [SCN] is OFF.
14. TOT Pre-Alert		13. Time Out Timer is OFF.
15. TOT Rekey Time		13. Time Out Timer is OFF.
16. TOT Reset Time		13. Time Out Timer is OFF.
31. Connect ID		29. PTTID is OFF or disconnected and 30. Dial ID is OFF.
32. Disconnect ID		29. PTTID is OFF or connected and 30. Dial ID is OFF.
38. Intermediate Code		37. DTMF signaling is OFF or code SQ.
39. Group Code		37. DTMF signaling is OFF.
40. Unmute Time		37. DTMF signaling is OFF.
41. Call Alert/Transpond		37. DTMF signaling is OFF.

模式组合

功能号码	功能名称	选择设定值(有底线的为初始值)	显 示		备 注	
37	DTMF 功能选择	<u>无</u>	37	OFF	无DTMF 功能	
		编码静噪	37	1	编码静噪	
		选呼	37	2	选择呼叫	
38	中间号码	0~9	38	0	所选择的数字或字符成为中间号码	
			38	3		
		A~D	38	A		
			38	d		
		*	38	E		
		#	38	F		
39	组呼“王码”选择	<u>无</u>	39	OFF	没有组呼号码	
		A~D	39	A	设定组呼的“E” 码	
			39	d		
		*	39	E		
		#	39	F		
40	静噪自动关闭时间	<u>无</u>	40	OFF	无自动关闭功能	DTME 信号一致后,直至解除一致状态为止的时间
		1~15秒(初始值:10秒) (步进值:1秒)	40	1	编码静噪被打开后,经过	
			41	15	设定的时间,将自动关闭	
41	被呼提示/自动应答	<u>OFF</u>	41	OFF	无此类功能	
		被呼提示	41	1	被呼时,有振铃提示	
		自动应答(振铃信号)	41	2	以振铃信号作为应答信号	
		自动应答(自台号码)	41	3	以自台号码作为应答信号	
		自动应答(0存储器内容)	41	4	以缩位拨号的0存储器的内容作为应答信号	
42	加强自动应答	<u>无</u>	42	OFF	加强自动应答无效	直至没有占线为止等待应答的功能
		有	42	ON	加强自动应答有效	
结束			End			

显示“End”后,按(PTT)键,就返回第24项“号码宽度”设置。

注:如果变更第37项“DTMF功能选择”的设定,存储了新的设定值,则在信道模式中设定的自台号码被初始化,成为“000”。

●自编程模式时的注意事项:

以自编程模式进行设定时,如下表的组合所示,因为基本功能设定成为OFF,因此虽然可以进行设定,但动作变无效。


功能名称	设定内容	变无效的条件
2TONE/DTMF	DTMF	37.DTMF信令成为OFF时。
2.(SCN)	TO	7.优先成为被固定或被选择时。
6.优先	被固定,被选择	2.(SCN)成为OFF时。
7.优先CH		6.优先成为OFF或被固定时。
8.回送A		6.优先成为OFF时。
9.回送B		6.优先成为OFF时。
10.反向CH	优先, 优先+选择	6.优先成为OFF时。
11.停留时间		2.(SCN)成为OFF时。
12.失落延时		2.(SCN)成为OFF时。
14.TOT预报警		13.超时定时器成为OFF时。
15.TOT重按键时间		13.超时定时器成为OFF时。
16.TOT复位时间		13.超时定时器成为OFF时。
31.连接ID		29.PTT ID成为OFF或断开,且30.拨号ID成为OFF时。
32.断开ID		29.PTT ID成为OFF或连接,且30.拨号ID成为OFF时。
38.中间代码		37.DTMF信令成为OFF或代码SQ时。
39.群代码		37.DTMF信令成为OFF时。
40.无静噪时间		37.DTMF信令成为OFF时。
41.呼叫报警/转发		37.DTMF信令成为OFF时。

REALIGNMENT

6-3 Self Programming (setting the channels)

Operation

1. Set in Dealer Mode after first turning POWER ON by simultaneously pressing the [LAMP] and [DIAL] keys (takes about 2 seconds).

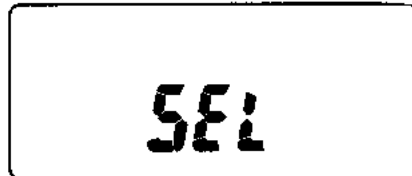

Dealer Mode

2. Press [TA] while in Dealer Mode and set Channel Set Mode.
3. Make DTMF function ON/OFF or select settings with "Channel Selector" and the 16 keys (0 to 9, * # A to D).
4. Store the selected values or functions by pressing the [PTT] switch and then move on to the next function.
5. Press [TA] key if you wish to return to Dealer Mode. Information shown on the display at this time will not be stored in the memory.
6. During each function setting a "Beep Op. Tone" sounds each time you store information from the display in the memory by pressing [PTT].
7. The message "END" is displayed when all DTMF function setting is complete.

Function Name	Setting (Defaults are underlined)	Display	Remarks
Channel Selection	1ch ~ 32CH <u>1CH</u>	CH 1	● Set to "RX FREQUENCY" after making selection.
		CH 32	
RX FREQUENCY	<u>Blank</u>	- - - - -	<ul style="list-style-type: none"> ● Change in 1 step increments → [Channel Selector] ● Switch between 6.25/5kHz steps → [SCN] ● Blank/frequency display selector → [LO] ● Change MHz digits → [LAMP] + [Channel Selector] ● The reset value when changing from blank to frequency display is the reset value for that version. ● The reset (initialization) steps are 6.25kHz. ● Set to "RX Signaling" after each frequency setting for the TK-370/378. (Set to channel selection when making blank settings.)
	100.000MHz or more	100.00000	
	Under 550.000MHz (5kHz steps)	549.99500	
	100.000MHz or more	100.00000.	
RX SIGNALING (TK-378)	Under 550.000MHz (6.25kHz steps)	549.99375.	<ul style="list-style-type: none"> ● Code selection → [Channel Selector] ● QT Change in 0.1 Hz step mode → [SCN] ● Blank/QT switching → [LO] ● Set to "TX FREQUENCY" after making settings.
	<u>OFF</u>	OFF	
	QT 67.0Hz ~ 250.3Hz	1 67.0	
	QT (0.1Hz step mode) 67.0Hz ~ 250.3Hz	38 250.3	
RX SIGNALING (TK-370)	QT 67.0Hz ~ 250.3Hz	67.0.	<ul style="list-style-type: none"> ● Code selection → [Channel Selector] ● Blank/QT/DQT switching → [LO] ● QT Change in 0.1 Hz step mode → [SCN] ● Switch between DQT standard table mode and 1 step mode → [SCN] ● Switch between DQT Normal and Inverse → [DIAL] ● Set to "TX FREQUENCY" after making settings.
	QT (0.1Hz step mode) 67.0Hz ~ 250.3Hz	250.3.	
	<u>OFF</u>	OFF	
	QT 67.0Hz ~ 250.3Hz	67.0	
	QT (0.1Hz step mode) 67.0Hz ~ 250.3Hz	250.3	
	DQT (Normal - standard table mode) 000 ~ 777	000	
	DQT (Normal - 1 step mode) 000 ~ 777	777	
	DQT (Inverse - standard table mode) -000 ~ -777	000.	
	DQT (Inverse - 1 step mode) -000 ~ -777	777.	
	DQT (Inverse - standard table mode) -000 ~ -777	-000	
	DQT (Inverse - 1 step mode) -000 ~ -777	-777	

模式组合

6-3 自台编程(信道设定)

操作:

1. 同时按住 [LAMP] 和 [DIAL] 键, 接通电源, 2 秒钟后进入“经销商模式”。

SEL

经销商模式

2. 在经销商模式中, 按 [TA] 键, 进入“信道设定模式”。
3. 用信道选择旋钮以及16制式键盘(0~9、*、#、A~D)选择信道各功能或设定值
4. 选择了设定值后, 按 [PTT] 键, 所选择的设定值被存储。菜单转到下一项目。
5. 一按 [TA] 键, 立即从当前的项目返回到“经销商模式”, 当时所显示的内容不被存储。6. 在设定各项目时, 按 [PTT] 键, 所选择的内容, 被存储, 就可以听到确认键操作有效的“嘟—”的声音。
7. 全部的信道功能, 参数设定完成后, 显示“End”。

功能名称	选择设定值(有底线的为初始值)	显示	备 注
信道选择	1CH~32CH <u>1CH</u>	CH 1 CH 32	●选定后, 移到“接收频率”设定
接收频率设定	<u>空位</u> 100.000MHz以上 550.000MHz以下(步进值: 5kHz) 100.000MHz以上 550.000MHz以下(步进值: 6.25kHz)	----- 100.00000 549.99500 100.00000 549.99375	●频率改变 → “信道选择”旋钮 ●切换步进值(6.25/5kHz) → [SCN] 键 ●切换空位/频率显示 → [LO] 键 ●变为1MHz步进 → [LAMP] 键 + [信道选择] 旋钮 ●从空位显示变更到频率显示时, 初期值是各频率型式的初始值 ●初始步进值: 6.25kHz ●接收频率设定后, TK-370/378 分别进入“接收信令”的设定(如果设定了空位, 回到“信道选择”项)
接收CTCSS频率 (TK-378)	<u>不使用</u> CTCSS亚音频(标准) 67.0~250.3Hz CTCSS亚音频(非标准) (步进值: 0.1Hz) 67.0~250.3Hz	OFF 1 67.0 38 250.3 67.0 250.3	●选择代码 → [信道选择] 旋钮 ●CTCSS功能, 变更到以0.1Hz为步进值自由选择亚音频 → [SCN] 键 ●切换空位显示和CTCSS频率显示 → [LO] 键 ●设定完成后移到“发射频率”的设定
接收CTCSS频率 或亚音数码 (TK-370)	<u>不使用</u> CTCSS(标准) 67.0~250.3Hz CTCSS(非标准) (步进值: 0.1Hz) 67.0~250.3Hz 亚音数码(正常·标准表模式) 000~777 亚音数码(正常·1步进模式) 000~777 亚音数码(反向·标准表模式) -000~-777 亚音数码(反向·1步进模式) -000~-777	OFF 67.0 250.3 67.0 250.3 000 777 000 777 -000 -777 -000 -777	●选择代码 → “信道选择”旋钮 ●切换显示内容(空位/CTCSS频率/亚音数码) → [LO] 键 ●CTCSS模式: 切换到0.1Hz步进的模式 → [SCN] 键 ●亚音数码的标准表模式和1步进模式的切换 → [SCN] 键 ●亚音数码的正常模式和反向模式的切换 → [DIAL] 键 ●设定完成后移到“发射频率”的设定

REALIGNMENT

Function Name	Setting (Defaults are underlined)	Display	Remarks	
TX FREQUENCY	<u>Blank</u>	- - - - -	● Change in 1 step increments → [Channel Selector]	
	100.000MHz or more	100.00000	● Switch between 6.25/5kHz steps → [SCN]	
	Under 550.000MHz (5kHz steps)	549.99500	● Blank/frequency display selector → [LO]	
	100.000MHz or more	100.00000.	● Change MHz digits → [LAMP] + [Channel Selector]	
	Under 550.000MHz (6.25kHz steps)	549.99375.	● The reset value the changing from blank to frequency display is the reset value set in RX FREQUENCY. ● Set to "TX Signaling" after each frequency setting for the TK-370/378. ● Set to "DTMF SIGNALING" when making blank settings.	
TX SIGNALING (TK-378)	<u>OFF</u>	OFF	● Change in 1 step increments → [Channel Selector]	
	QT 67.0Hz ~ 250.3Hz	1 67.0 38 250.3	● QT Change in 0.1 Hz step mode → [SCN]	
	QT (0.1Hz step mode) 67.0Hz ~ 250.3Hz	67.0. 250.3.	● Blank/QT switching → [LO]	
			● Set to "DTMF SIGNALING" after making settings	
TX SIGNALING (TK-370)	<u>OFF</u>	OFF	● Code selection → [Channel Selector]	
	QT 67.0Hz ~ 250.3Hz	67.0 250.3	● Blank/QT/DQT switching → [LO]	
	QT (0.1Hz step mode) 67.0Hz ~ 250.3Hz	67.0. 250.3.	● QT Change in 0.1 Hz step mode → [SCN]	
	DQT (Normal - standard table mode) 000 ~ 777	000 777	● Switch between DQT standard table mode and 1 step mode → [SCN]	
	DQT (Normal - 1 step mode) 000 ~ 777	000. 777.	● Switch between DQT Normal and inverse → [DIAL]	
	DQT (Inverse - standard table mode) -000~-777	-000 -777	● Set to "DTMF SIGNALING" after making settings	
	DQT (Inverse - 1 step mode) -000 ~ -777	-000. -777.		
DTMF SIGNALING ON / OFF (TK-378)	<u>OFF</u>	1 OFF	No DTMF Signaling	After setting, shift to PTT ID ENABLE setting
	ON	1 ON	Use DTMF Signaling	
2-TONE / DTMF (TK-370)	<u>OFF</u>	1 OFF	No Option signaling	After setting, shift to PTT ID ENABLE setting
	DTMF	1 1	Use DTMF Signaling	
	2-TONE	1 2	Use 2-Tone Signaling	
PTT ID ENABLE	<u>OFF</u>	2 OFF	Disable PTT ID	
	ON	2 ON	Enable PTT ID	
SCAN DELETE / ADD	<u>ADD</u>	3 Add	Set as scan item	
	DELETE	3 dEL	Not set as scan item	
BUSY CHANNEL LOCK OUT	<u>NO</u>	4 OFF	Disable Busy Channel Lockout	
	YES	4 ON	Enable Busy Channel Lockout	
CLOCK FRE- QUENCY SHIFT	<u>Disable</u>	5 OFF	Do not shift clock frequency	
	Enable	5 ON	Shift clock frequency	
TX POWER	<u>High</u>	6 H	Permit switching between High/Low Power	
	Low	6 L	Permit only Low Power	
ID CODE (DTMF)	<u>000</u>	7 000	ID Code	
	9999999999	7 99999		
				● Code input → 10 keys [0 to 9] ● Return to "Channel Selection" for other than the 32 channel settings. ● Move to End for 32 channel settings.
END		End	● Return to [Channel Selection] with [PTT] or the Channel Selector.	

模式组合

功能名称	选择设定值(有底线的为初始值)	显示		备 注	
发射频率	<u>空位</u>	-----		●频率改变 → “信道选择” 旋钮	
	100.000MHz 以上	100.00000		●切换步进值(6.25/5kHz) → [SCN] 键	
	550.000MHz 以下 (步进值: 5kHz)	549.99500		●切换空位/频率显示 → [LO] 键	
	100.000MHz 以上	100.00000		●变为 1MHz 步进 → [LAMP] 键 + (信道选择) 旋钮	
	550.000MHz 以下 (步进值: 6.25kHz)	549.99375		●从空位显示切换到频率显示时, 初期值是已设定的接收频率 ●发射频率设定后, TK-370/378 分别进入“发射信令”的设定 ●如果设定了空位, 进到“DTMF信令”项	
发射 CTCSS 频率 (TK-378)	<u>不使用</u>	OFF		●选择代码 → (信道选择) 旋钮	
	CTCSS 亚音频(标准) 67.0~250.3Hz	1	67.0	●CTCSS 功能, 变更到以 0.1Hz 为步进值自由选择亚音频 → [SCN] 键	
		38	250.3	●切换空位显示和 CTCSS 频率显示 → [LO] 键	
	CTCSS 亚音频(非标准) (步进值: 0.1Hz) 67.0~250.3Hz		67.0 250.3	●设定完成后移到“DTMF信令”的设定	
发射 CTCSS 频率 或亚音数码 (TK-370)	<u>不使用</u>	OFF		●选择代码 → “信道选择” 旋钮	
	CTCSS(标准) 67.0~250.3Hz	67.0 250.3		●切换显示内容(空位/CTCSS 频率/亚音数码) → [LO] 键	
	CTCSS(非标准) (步进值: 0.1Hz) 67.0~250.3Hz	67.0 250.3		●CTCSS 模式: 切换到 0.1Hz 步进的的模式 → [SCN] 键	
	亚音数码(正常·标准表模式) 000~777	000 777		●亚音数码的标准表模式和 1 步进模式的切换 → [SCN] 键	
	亚音数码(正常·1 步进模式) 000~777	000 777		●亚音数码的正常模式和反向模式的切换 → [DIAL] 键	
	亚音数码(反向·标准表模式) -000~-777	-000 -777		●设定完成后移到“DTMF信令”的设定	
	亚音数码(反向·1 步进模式) -000~-777	-000 -777			
DTMF 信令 (TK-378)	<u>无</u>	1	OFF	不使用 DTMF 信令	设定完成后移到 [ANI] 功能的设定
	有	1	ON	使用 DTMF 信令	
两音信令和 DTMF 信令 (TK-370)	<u>无</u>	1	OFF	不使用 DTMF 信令	设定完成后移到 [ANI] 功能的设定
	DTMF	1	1	使用 DTMF 信令	
	两音	1	2	使用两音信令	
ANI 功能	<u>无</u>	2	OFF	ANI 功能无效	
	有	2	ON	ANI 功能有效	
删除/追加选择	<u>追加</u>	3	Add	可以被扫描	
	删除	3	dEL	不能被扫描	
禁发功能	<u>无</u>	4	OFF	禁发功能无效	
	有	4	ON	禁发功能有效	
时钟拍频频率 偏移	<u>无</u>	5	OFF	不自动离开时钟拍频频率	
	有	5	ON	自动离开时钟拍频频率	
发射功率	<u>高</u>	6	H	可以切换高/低功率模式	
	低	6	L	只能在低功率模式	
自台号码 (DTMF)	<u>000</u>	7	000	自己的身份码	
	9999999999	7	99999		
				●输入号码 → [10个数字键(0~9)] ●未设定满32个信道时返回到“信道选择”项 ●设定满32个信道后, 显示结束(End)	
结束		End			

TK-370/378

REALIGNMENT/模式组合

Note : The "ID CODE" setting is skipped when setting "DTMF SIGNALING" to OFF on the TK-378, or setting "2-TONE / DTMF" to OFF on the TK-370 or when setting 2-Tone.

注：如果设定了不使用DTMF信令(TK-378)或不使用两音信令/DTMF信令(TK-370)，则自动跳过“白台号码”设定项。

QT Frequency / CTCSS 亚音频表

No.	Frequency [Hz]	No.	Frequency [Hz]	No.	Frequency [Hz]	No.	Frequency [Hz]
1	67.0	11	94.8	21	131.8	31	186.2
2	69.3	12	97.4	22	136.5	32	192.8
3	71.9	13	100.0	23	141.3	33	203.5
4	74.4	14	103.5	24	146.2	34	210.7
5	77.0	15	107.2	25	151.4	35	218.1
6	79.7	16	110.9	26	156.7	36	225.7
7	82.5	17	114.8	27	162.2	37	233.6
8	85.4	18	118.8	28	167.9	38	241.8
9	88.5	19	123.0	29	173.8	39	250.3
10	91.5	20	127.3	30	179.9		

DQT Standard Table / 亚音数码标准表

023	114	174	315	445	631
025	115	205	331	464	632
026	116	223	343	465	654
031	125	226	346	466	662
032	131	243	351	503	664
043	132	244	364	506	703
047	134	245	365	516	712
051	143	251	371	532	723
054	152	261	411	546	731
065	155	263	412	565	732
071	156	265	413	606	734
072	162	271	423	612	743
073	165	306	431	624	754
074	172	311	432	627	

REALIGNMENT/模式组合

6-4 Trunking Set Mode

1. Setting the SmarTrunk II™ Panel Programming Mode

■ There are two ways to enter this mode.

1. Select Trunking Mode while holding down the [MONI] key in Power ON.

- Set in SmarTrunk II™ Mode while connections are setup for ST-865KW2. (Scanning with the channel display shown on the LCD)

If SmarTrunk II™ Mode does not appear, turn off the power and then turn it back on while holding down the [MONI] key. (The display on the LCD starts to scan.)

- Turn the transceiver OFF.
 - Press and hold the [#] key on the front panel keypad.
 - Turn on the transceiver.
 - After the beep is heard, release the [#] key.
2. Hold down the [LAMP] and [DIAL] keys simultaneously, POWER ON is set after about 2 seconds. Then press the [LO] key on the "SEL" display.
- This applies to 1. and 2.
 - Enter the dealer programmed 5 digit access code, followed by the [#] key.
 - The ST-865KW2 will respond with a high beep. If a low beep is heard the access code was incorrect. Turn the transceiver OFF and try the procedure again.
- refer the ST-865KW2's manual for detail.

2. Outlines for Panel Programming Mode settings. Trunking (SmarTrunk II™)

- number of Trunking Channels
- Primary Code
- Secondary Code
- Priority Subscriber Enable
- Five digit Access Code
- Trunking System ID Number
- Automatic PTT Mode
- Emergency Call Override
- Conventional Mode Control
- Radio-Kill
- Clear channel alerting mode
- Memory Speed-Dialing Programming

Refer the ST-865KW2's manual for detail.

Note : The SmarTrunk II™ call is a registered trademark of the Selectone Corporation.

6-4 集群设定模式

1. 进入SmarTrunk II™面板编程模式的方法

■ 本模式的进入方法有两种

1) 按住 [MONI] 键, 接通电源, 选择集群通信模式

- 装有ST-865KW2逻辑板的通信机进入集群通信模式。(在显示屏上可以看到信道扫描)
当通信机没有处于集群通信模式时, 暂时关闭电源。然后, 按住 [MONI] 键, 接通电源, 通信机进入集群通信模式。(在显示屏上可以看到信道扫描)
- 关上通信机的电源。
- 按住前面板上的 [#] 键。
- 接通电源。
- 当听到“嘟—”的声音后, 松开 [#] 键。
- 输入经销商编程的5位接续号码, 然后按 [#] 键
初始接续号码(缺省值)是12345(初始值)。
- ST-865KW2将以高音调的“嘟—”音作为应答
如果听到是低音调的“嘟—”音, 则表示输入的接续号码错误。关闭通信机的电源, 按以上步骤再试一次。

2) 同时按住 [LAMP] 和 [DIAL] 键, 接通电源。2秒钟后显示屏上出现“SEL”字符, 然后, 按 [LO] 键

- 适用于1和2
- 输入经销商编程的5位接续号码, 然后按 [#] 键
- ST-865KW2将以高调的“嘟—”音作为应答
如果听到是低音调的“嘟—”音, 则表示输入的接续号码错误。关闭通信机的电源, 按以上步骤再试一次。

有关详细情况, 请参考ST-865KW2逻辑板的说明书。

2. 面板编程模式中的设定项目简介
集群(SmarTrunk II™)通信参数

- 集群信道数量
- 主身份号码(用于个别选呼)
- 副身份号码(用于小组呼叫)
- 优先用户功能启动
- 5位接续码
- 集群系统身份码
- PTT自动接续模式
- 紧急呼叫强插
- 常规模式控制
- 信道空闲提示模式
- “空中枪毙”功能
- 存储快速拨号编程


有关详细情况, 请参考ST-865KW2逻辑板的说明书。

注) Smar Trunk II™是SELECTONE公司注册的商标。

REALIGNMENT/模式组合

6-5 Wired Clone Mode

Connect the optional interface cable (KCT-8) so that the master side (source) and slave side (clone) are joined as shown in the drawing. (TK-370/378)

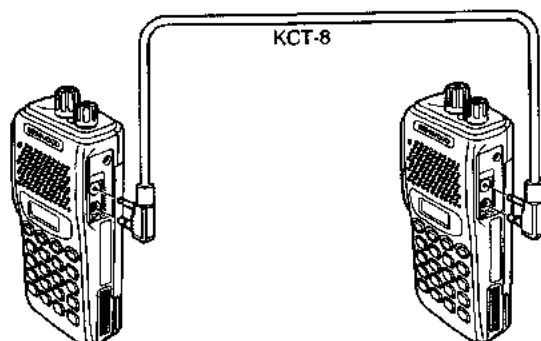


6-5 有线复制模式

把“母机”(复制方)和“子机”(被复制方)用KCT-8接口电缆(选件)按下图所示方法连接起来。

■ Master side



Operation

1. Set in Dealer Mode after first turning Power ON by simultaneously pressing the [LAMP] and [DIAL] keys (takes about 2 seconds).
2. Press [LAMP] while in dealer mode and set in [Clone Mode (chain line - transmit side)]

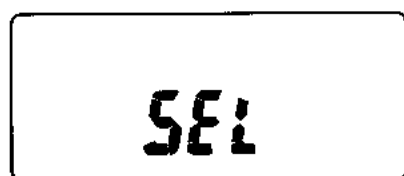


Dealer Mode 经销商模式

3. Send the clone data by pressing [MONI]. The LED lights up (red) during data transfer.
4. The message "END" is displayed when data transfer is complete and the LED turns off.
5. You can clone other transceivers by pressing [MONI] when "END" is displayed and returning to Clone Mode to start the clone process again. Press [LAMP] if you wish to return to Dealer Mode.

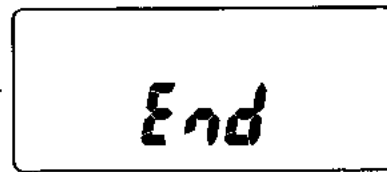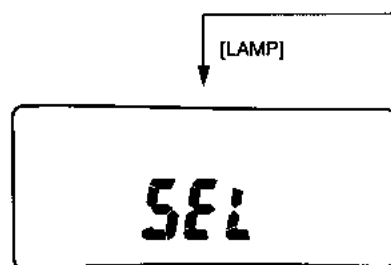Sending clone data
正在传送复制数据LED(red)lights up
红色指示灯亮Clone data transfer complete
传送数据结束LED turns off
指示灯熄灭

Dealer Mode 经销商模式

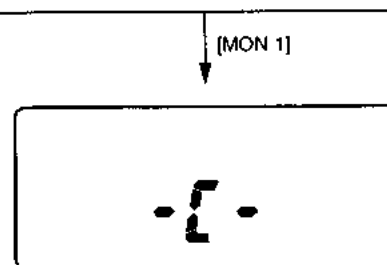

Clone Mode 复制模式

■ “母机”方面

操作:

1. 同时按住 [LAMP] 和 [DIAL] 键, 接通电源 2 秒钟后进入“经销商模式”。
2. 在经销商模式中按 [LAMP] 键, 进入“复制模式(有线·发射方)”。

3. 按 [MONI] 键, 开始传送数据。在数据传送中, 发射指示灯(红色)点亮。
4. 数据传送一结束, 显示“End”。发射指示灯熄灭。
5. 在显示 [End] 的状态下, 按 [MONI] 键, 返回到复制模式, 可以继续对下一台通信机进行复制, 或者, 按 [LAMP] 键, 返回经销商模式。

REALIGNMENT/模式组合


■ Slave side

Operation


1. Set Power On with the startup keys and standby.
2. When data is sent from the master, display "BUSY" and "-PC-" and shift to PC Mode.




Receiving data
接收数据

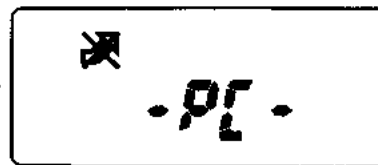

3. The message "END" appears when all data is received.

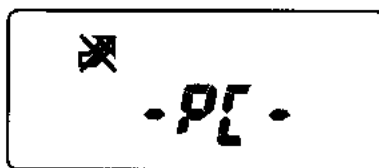

Data receiving complete
数据接收结束

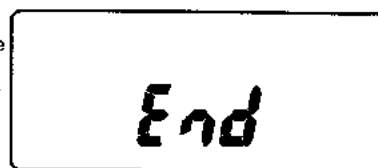

4. After the "END" display appears, operation is the same as for the Master side in 5. on the previous page.

■ “子机”方面

操作:

1. 接通电源, 等待。
2. “母机”一发出数据, 显示屏上就出现“繁忙”标志, 显示“-PC-”字符, 进入到计算机模式。

3. 接收完全部数据, 显示屏上出现“End”字符。

4. 在显示“End”的状态下, 按 [MONI] 键, 返回到复制模式, 可以继续对其它通信机进行复制。或者, 按 [LAMP] 键, 返回经销商模式。

Note : During cloning do not perform any action which might interrupt the cloning such as cutting off power to the transceiver.


注: 在复制过程中, 不要做诸如关闭通信机电源等使复制中断的操作。

6-6 Wireless Clone Mode

Setup the master side (source) and slave side (clone).

6-6 无线复制模式

准备好“母机”(复制方)和“子机”(被复制方)。



Master side
“母机”



Slave side
“子机”

■ Master Side

Operation

1. Set in Dealer Mode after first turning Power ON by simultaneously pressing the [LAMP] and [DIAL] keys (takes about 2 seconds).

■ “母机”方面


操作:

1. 同时按住 [LAMP] 和 [DIAL] 键, 接通电源 2 秒钟后进入“经销商模式”。

REALIGNMENT/模式组合


2. Press [MONI] in Dealer Mode and set "Wireless Clone Mode" (hereafter shown as Clone Mode). The frequency on the display is the reset frequency matching the destination.

2. 在经销商模式中, 按 [MONI] 键进入“无线复制模式”(以下简称复制模式)此时显示的频率是与各型式机相对应的初始频率。

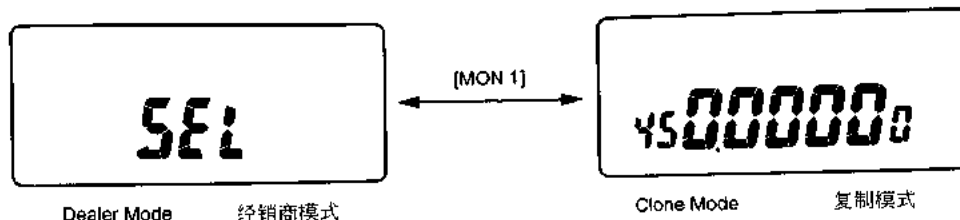


3. Rotate the [CHANNEL Selector] and select the frequency used for the wireless clone.

3. 旋转信道选择旋钮, 选择所想使用的无线复制频率。

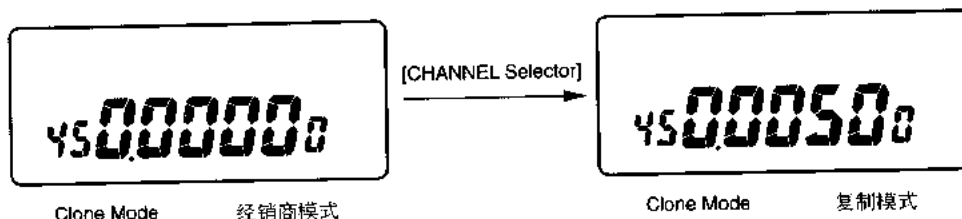


4. Press [PTT] to start data transmission. The display changes to "00 CLONE" and the LED (red) lights up. The leftmost digits (00) on the LCD immediately show the data transfer rate and as data transmission proceeds the digits count upwards in increments of 5 and transmission output sets to LO POWER.

4. 按 [PTT] 键, 开始发送数据, 显示屏显示 "00 CLONE", 发射指示灯(红色)点亮。显示屏左侧的00位表示数据复制的比率, 随着数据的不断发出, 以5为基本单位增长。

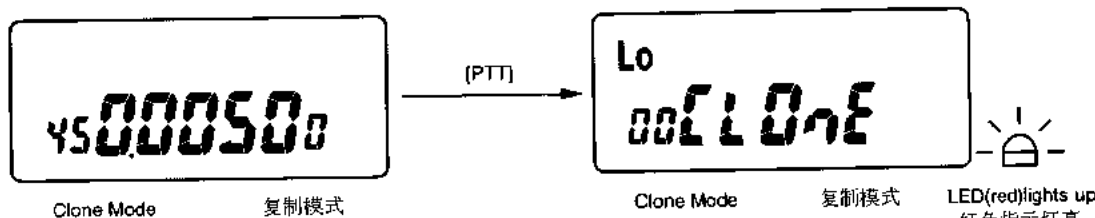

5. The message "END" appears when data transfer is complete and the LED turns off.

5. 数据传送一结束, 显示 "End". 发射指示灯熄灭。

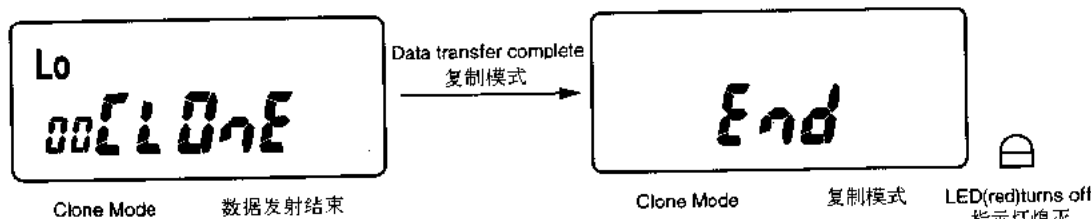


6. You can clone other transceivers by pressing [MONI] when "END" is displayed and returning to Clone Mode to start the clone process again. Press [LAMP] if you wish to return to Dealer Mode.

6. 在显示 "End" 的状态下, 按 [MONI] 键, 返回到复制模式, 可以继续对下一批通信机进行无线复制。或者, 按 [LAMP] 键, 返回经销商模式。


REALIGNMENT/模式组合

■ Slave Side Operation

1. Set in Dealer Mode after first turning Power ON by simultaneously pressing the [LAMP] and [DIAL] keys (takes about 2 seconds).
2. Press [MONI] in Reset Mode and set "Wireless Clone Mode" (hereafter shown as Clone Mode). The frequency on the display is the reset (initial) frequency matching the destination.
3. The display changes to "00 CLONE" when the data output from the master is received and the "BUSY" display lights up. The leftmost digits (00) on the LCD immediately show the data transfer rate and as data reception proceeds the digits count upwards in increments of 5.

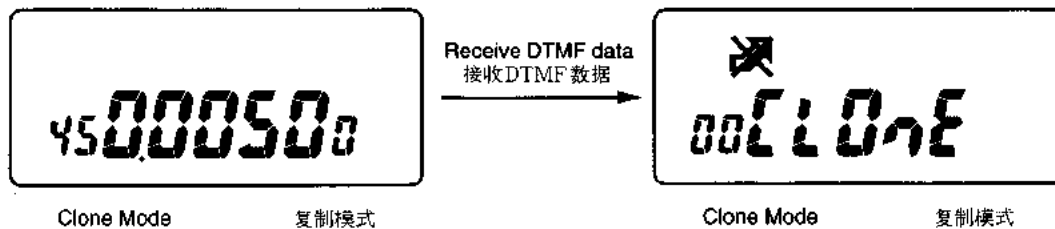

4. The message "END" is displayed when all of the data is received.

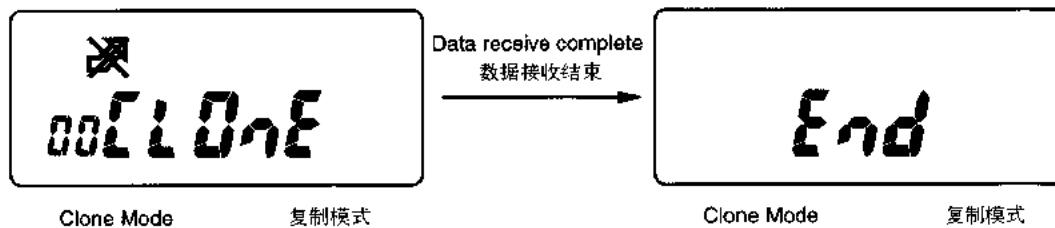

5. When the message "END" is displayed, operation is the same as for the master side in (6) on the previous page.

Please enforce absolutely

- (1) Attach the antenna to the transmitting wireless unit.
- (2) Remove the antenna from the receiving wireless unit.
- (3) Bring the transmitting and the receiving wireless units as close together as possible.

Note : During cloning do not perform any action which might interrupt the cloning such as cutting off power to the transceiver.

■ “子机”方面 操作:

1. 同时按住 [LAMP] 和 [DIAL] 键, 接通电源 2 秒钟后进入“经销商模式”。
2. 在经销商模式中, 按 [MONI] 键进入“无线复制模式”(以下简称复制模式) 此时显示的频率是与各型式机相对应的初始频率。
3. 收到“母机”发出的数据, 显示屏显示“00 CLOnE”, 并且出现“繁忙”标志。显示屏左侧的00位表示数据复制的比率, 随着不断收到数据, 以 5 为基本单位增长。

4. 收到了全部数据后, 显示“End”。

5. 在显示“End”的状态下, 按 [MONI] 键, 返回到复制模式, 可以继续对其它通信机进行无线复制。或者, 按 [LAMP] 键, 返回到经销商模式。

请确实加固

- (1) 将天线安装在发射无线装置。
- (2) 从接收无线装置卸下天线。
- (3) 使发射和接收无线装置尽可能靠近。


注: 在复制过程中, 不要做诸如关闭通信机电源等使复制中断的操作。

7. TEST MODE

7-1 LCD All Lamp Mode

Operation

1. Set in Test Mode after first turning Power ON by simultaneously pressing the [LAMP] and [TA] startup keys (takes about 2 seconds).
2. Set LCD All Lamp Mode by pressing [SCN] while in Test Mode.
3. Pressing [SCN] now switches alternately between Test Mode and LCD All Lamp Mode.

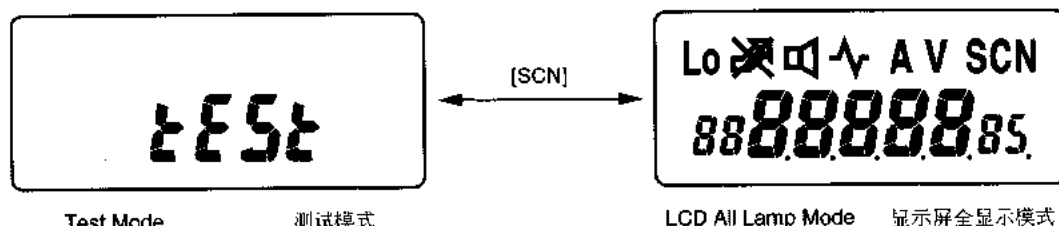

7. 测试模式

7-1 显示屏全显示模式

操作:

1. 同时按住 [LAMP] 和 [TA] 键, 接通电源, 2秒钟后进入“测试模式”。
2. 在测试模式中, 按 [SCN] 键, 进入“显示屏全显示模式”。
3. 之后, 每按一次 [SCN] 键, 测试模式和显示屏全显示模式就切换一次。

7-2 Destination Set Mode


Operation

1. Set in Test Mode after first turning Power ON by simultaneously pressing the [LAMP] and [TA] startup keys (takes about 2 seconds).
2. Set Destination Set Mode by pressing [LO] while in Test Mode.
3. Rotate the [CHANNEL Selector] to change the destinations. (Display numbers change)
4. Set the display number that you need as the destination by pressing [PTT].
5. Press [LO] to return to Test Mode.

7-2 型式设定模式

操作:

1. 同时按住 [LAMP] 和 [TA] 键, 接通电源, 2秒钟后进入“测试模式”。
2. 在测试模式中, 按 [LO] 键, 进入“型式设定模式”。
3. 旋转“信道选择”旋钮, 改变型式(变更显示代码)。
4. 按 [PTT] 键, 设定当前显示号码所代表的型式。
5. 按 [LO] 键, 返回“测试模式”。

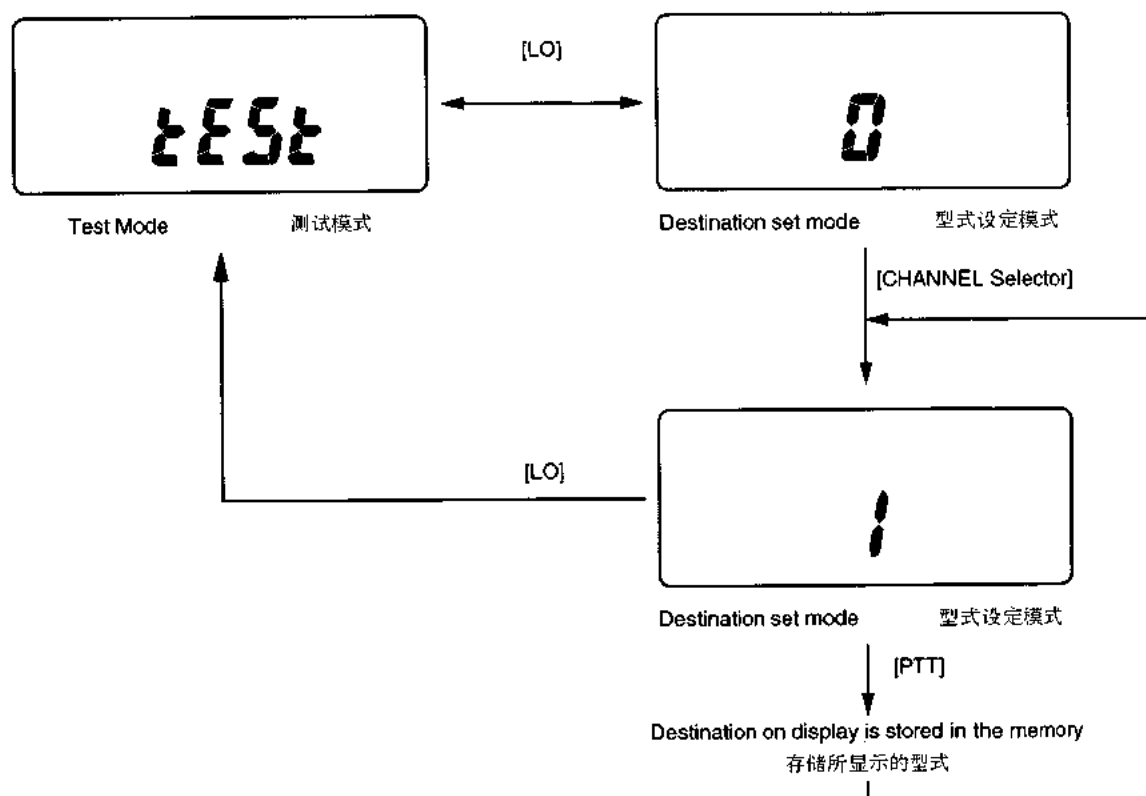

REALIGNMENT/模式组合

Note : Setting the destination with [PTT] clears channel data (frequencies, QT/DQT and channel functions) previously stored in the memory and also partially changes the functions so do not make settings except when made unavoidable due to EEPROM replacement or original settings etc.

注：一旦按 (PTT) 键设定了新型式，则以前存储的信道数据(频率、CTCSS亚音频/亚音数码、各信道的功能)就被清除了，一部分功能也会发生变化。因此，除了在更换EEPROM存储器等必须要设定新型式的情况下，不要进行此项操作。

■ Display Numbers for Destination Settings

Model	Destination	Display No.	Reset Freq.(MHz)	TX/RX Freq. (MHz)	IF Freq. (MHz)	1st Local
TK-278	M2	0	140	136 ~ 150	45.05	UPPER
	M	1	150	150 ~ 174	45.05	UPPER
TK-378	M4	2	410	400 ~ 420	46.35	LOWER
	M	4	450	450 ~ 470	45.05	LOWER
TK-270	K2	7	140	136 ~ 150	45.05	UPPER
	K	8	150	150 ~ 174	45.05	UPPER
TK-370	K4	10	410	406 ~ 430	45.05	LOWER
	K	11	450	450 ~ 470	45.05	LOWER
	K2	12	470	470 ~ 490	45.05	LOWER
	K3	13	490	490 ~ 512	46.35	LOWER


■ 型式设定的显示代码

机 型	型 式	显示代码	初始频率 (MHz)	发射/接收频率 (MHz)	第一中频频率 (MHz)	第一本振频率
TK-278	M2	0	140	136~150	45.05	较高
	M	1	150	150~174	45.05	较高
TK-378	M4	2	410	400~420	46.35	较低
	M	4	450	450~470	45.05	较低
TK-270	K2	7	140	136~150	45.05	较高
	K	8	150	150~174	45.05	较高
TK-370	K4	10	410	406~450	45.05	较低
	K	11	450	450~470	45.05	较低
	K2	12	470	470~490	45.05	较低
	K3	13	490	490~512	46.35	较低

7-3 Frequency Display Mode (for checking frequencies and for service work)

Operation

1. Set in Test Mode after first turning Power ON by simultaneously pressing the [LAMP] and [TA] startup keys (takes about 2 seconds).
2. Set Frequency Display Mode by pressing [TA] while in Test Mode.
3. Pressing [TA] now switches alternately between Test Mode and Frequency Display Mode.

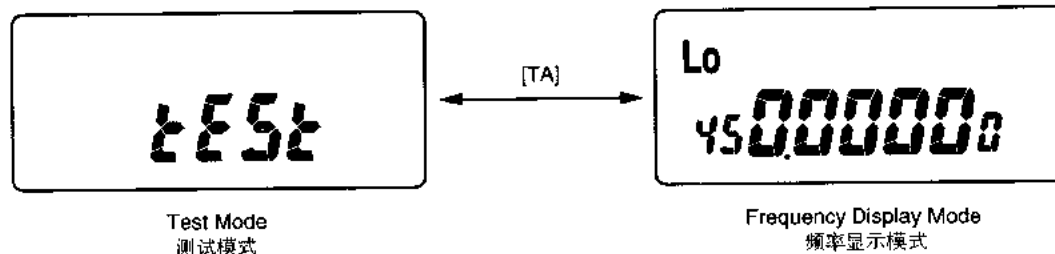

Note 1: The reset (initial) frequency varies according to the type of model.

Note 2: Set the initial transmit power to LO POWER.

7-3 频率显示模式(确认频率和维修通信机时使用)

操作:

1. 同时按住 [LAMP] 和 [TA] 键, 接通电源, 2秒钟后进入“测试模式”。
2. 在测试模式中, 按 [TA] 键, 进入“频率显示模式”。
3. 之后, 每按一次 [TA] 键, 测试模式和频率显示模式就切换一次。


注: 1. 初始频率根据机型和型式而定。

2. 初始发射功率为低功率。

7-3-1 Changing the Frequency

Operation

1. Rotating the [CHANNEL selector] to the right while in Frequency Test Mode raises the frequency, while turning it to the left lowers the frequency one step at a time.
2. Rotating the [CHANNEL selector] while holding down the [LAMP] key, changes the frequency in 1 MHz steps.
3. The steps are switched in the following order each time [DIAL] is pressed.



Note 1: The frequency display range is 100MHz or more and less than 550MHz.

Note 2: The value are not shown in steps on the display.

7-3-1 调整频率

操作:

1. 在频率显示模式中, 向右旋转 [信道选择] 旋钮, 频率增高; 向左旋转 [信道选择] 旋钮, 频率降低。频率按步进值变化。
2. 按住 [LAMP] 键, 再旋转 [信道选择] 旋钮, 则频率以 1 MHz 为步进值变化。
3. 每按一次 [DIAL] 键, 频率步进值按如下循环顺序变化一级。


注: 1. 频率显示范围在100MHz~550MHz之间。

2. 没有频率步进值显示。

REALIGNMENT/模式组合

7-3-2 QT
Operation

1. To enter QT Set Mode, press [DIAL] while holding down [LAMP] in Frequency Display Mode.
2. Rotate the [CHANNEL selector] and select the QT frequency count tone.
3. Press the key you want to set the tone, this returns to the frequency display. Key operation is not performed at that time.

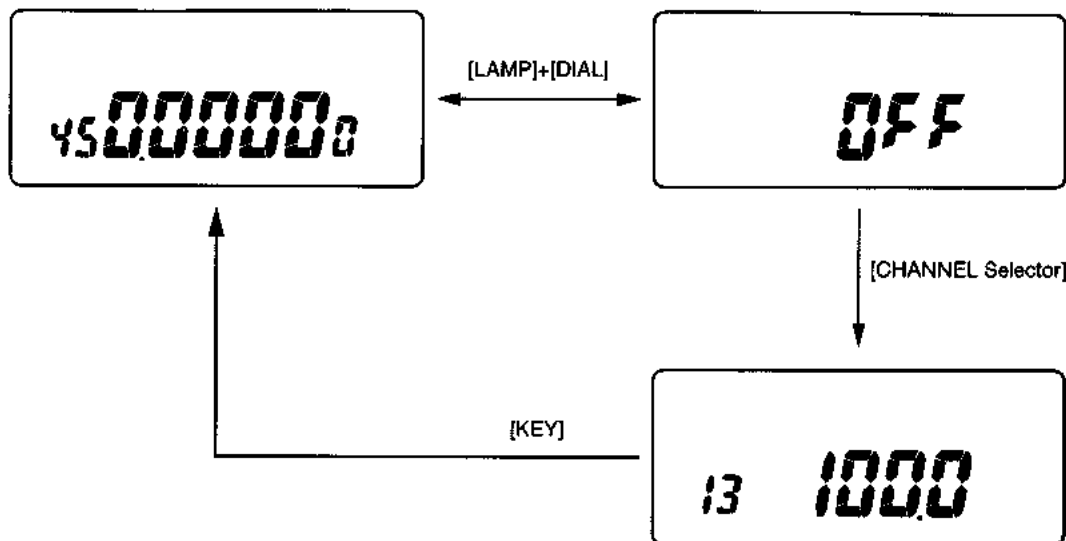

Note 1: The QT that was selected is used for both transmit and receive.

Note 2: The tone that was set is only for the QT frequency. This cannot be changed in 0.1Hz steps.

Note 3: Will not shift to QT Set Mode even if [DIAL] is pressed while [LAMP] is held down during test scan.

7-3-2 CTCSS亚音频
操作:

1. 在频率显示模式中, 同时按 [LAMP] 键和 [DIAL] 键, 进入 CTCSS 频率设定模式。
2. 旋转 [信道选择] 旋钮, 在标准亚音频序列中选择所需要的亚音频。
3. 按任意一个键, 所选择的亚音频就被设定了, 同时自动回到频率显示状态。

注: 1. 设定的亚音频既是接收亚音频又是发射亚音频。

2. 只能选择设定 CTCSS 标准亚音频, 不能以 0.1Hz 步进值变更亚音频。

3. 在测试扫描中, 即使同时按 [LAMP] 键和 [DIAL] 键, 也不会进入 CTCSS 频率设定模式。

REALIGNMENT


8. PC MODE

- Refer to the FPU (KPG-27D) operating specifications for details on setting the PC mode.

- Preface

The TK-370/378 transceiver is programmed by using a personal computer, programming interface (KPG-22) and programming software (KPG-27D).

The programming software can be used with an IBM PC or compatible. Figure 1 shows the setup of an IBM PC for programming.

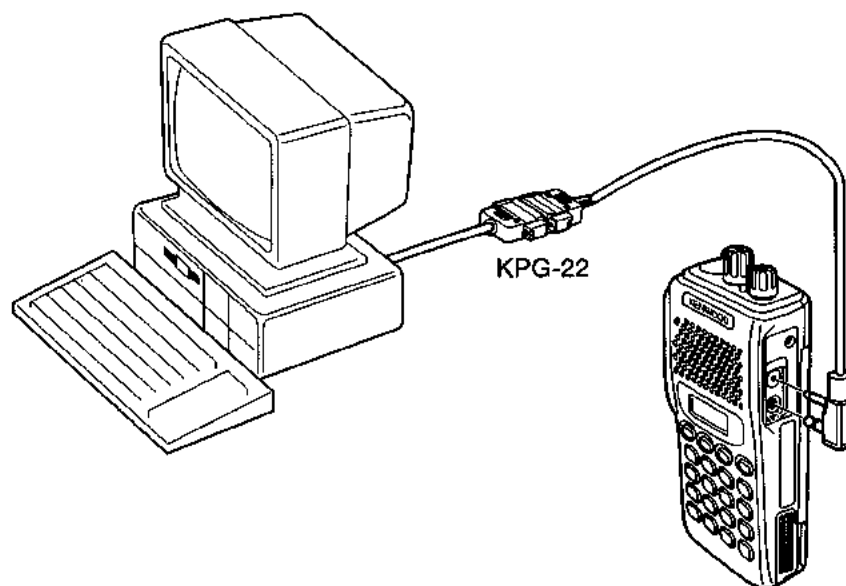

- KPG-22 description

(PC programming interface cable: Option)

The KPG-22 is required to interface the TK-370/378 to the computer. It has a circuit in its D-subconnector (25-pin) case that converts the RS-232C logic level to the TTL level.

The KPG-22 connects the side panel jacks of the TK-370/378 to the computer's RS-232C serial port.

- Programming software description

The KPG-27D Programming Disk is supplied in 5-1/4" and 3-1/2" disk format. The Software on this disk allows a user to program TK-370/378 radios via Programming Interface cable (KPG-22).

- Connection procedure

1. Connect the TK-370/378 to the personal computer with the interface cable.
2. Turn ON the POWER switch.
The green LED lights up when the transceiver is receiving data and the busy mark appears.

- Notes:

- Do not press the [PTT] key during data transmission or reception.

- Programming with IBM PC

If data is transferred to the transceiver from an IBM PC with the KPG-27D, the destination data (basic radio information) for each set can be modified. Normally, it is not necessary to modify the destination data because their values are determined automatically when the frequency range (frequency type) is set.

The values should be modified only if necessary.

Data can be programmed into the E²PROM in RS-232C format via the SP MIC plug.

In this mode the PTT lines operate as RXD data lines respectively.

(KPG-27D Instruction Manual Parts No : B62-0629-00)


模式组合

8. 计算机模式

■ 关于计算机模式的设定请参阅外部写频软件(KPG-27D)的操作说明书

● 序言

可以使用个人计算机、编程接口电缆(KPG-22)和编程软件(KPG-27D)从外部对TK-370/378通信机进行编程设定。编程软件可以在IBM PC及其兼容计算机上运行。编程时,按附图所示连接计算机和通信机。

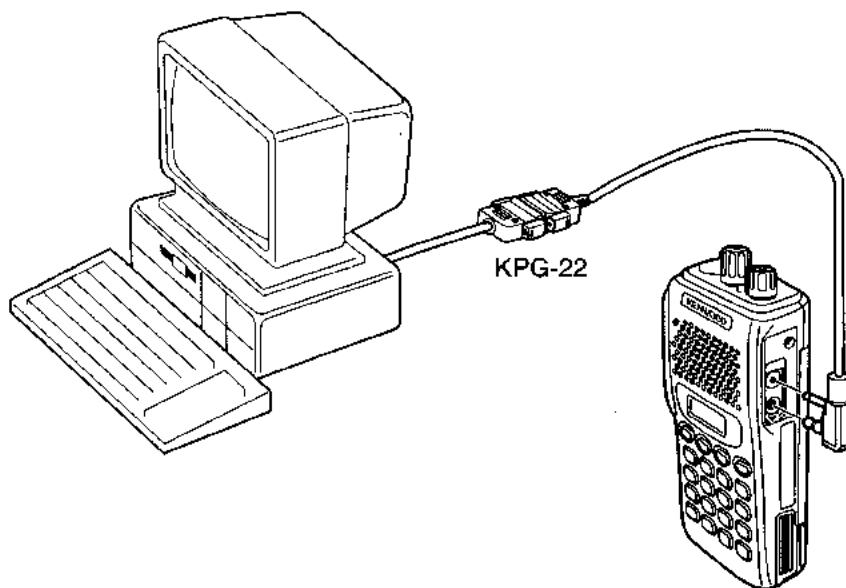

● KPG-22 说明

(计算机编程接口电缆; 选件)

KPG-22是TK-370/378与计算机连接时不可缺少的接口, 在其D型副插座(25芯)中有一个电平转换电路, 可以把RS-232C逻辑电平转换为TTL电平。

KPG-22一端连接到TK-370/378的外部扬声器/话筒插座上, 另一端和计算机的RS-232C串行接口相连接。

● 编程软件说明

KPG-27D编程软件磁盘有两种规格供选择, 一种是5-1/4英寸的磁盘, 另一种是3-1/2英寸的磁盘。有了此磁盘就可以通过编程接口电缆(KPG-22)对TK-370/378进行外部编程设定。

● 连接步骤

1. 用接口电缆连接TK-370/378和计算机。
2. 打开电源开关。

当通信机接收到数据时, 通信机的绿色指示灯点亮, 并且显示屏上出现“繁忙”标志。

注意:

- 在传送或接收数据的过程中, 不要按通信机的(PTT)键。

● 用IBM PC计算机编程

如果用装有KPG-27D磁盘的IBM PC计算机向通信机传送数据, 可以改变各项调整的目的数据(通信机的基本参数)。由于决定频率范围(频率型式)的时候, 目的数据就确定了, 因此, 在通常情况下, 不需要修改它们。

只有在必要的情况下, 才修改目的数据值。

RS-232C格式的数据通过通信机的外部扬声器/话筒插口编程设定到通信机内的EEPROM存储器中。

在此模式中, (PTT)线的作用相当于接收数据线。

(KPG-27D使用说明书零件号码: B62-0629-00)

REALIGNMENT/模式组合

■ Operation

1. PC → TRANSCEIVER (Storing)

■ 操作

1. 计算机 → 通信机

Transceiver status	Display	LED
Reset status (User Mode) 初始状态(用户模式)		
Receive data from PC 从计算机接收数据		Green lamp lights up 绿色灯亮
End of data reception 接收数据结束		Turns OFF 熄灭

2. TRANSCEIVER → PC (Loading)

2. 通信机 → 计算机

Transceiver status	Display	LED
Reset status (User Mode) 初始状态(用户模式)		
Transmit data from transceiver to PC 通信机向计算机发送数据	LED (red) lights up 红色指示灯亮 	Red lamp lights up 红色灯亮
End of data transmission 发送数据结束	LED turns off 指示灯熄灭 	Turns OFF 熄灭


DISASSEMBLY FOR REPAIR / 为维修的拆卸

Separating the case assembly from the chassis

1. Remove the two knobs ① and three round nuts ②, and remove the panel ③.
2. Remove the one screw ④.
3. Expand the right and left sides of the bottom of the case assembly, lift the chassis, and remove it from the case assembly ⑤.

外壳组件和底盘的分离

1. 卸下2个旋钮(①)和3个圆形螺母(②), 然后卸下面板(③)。
2. 取下1个螺丝(④)。
3. 边左右分别扩展外壳组件下侧, 边抬起底盘并从外壳组件拔出(⑤)。

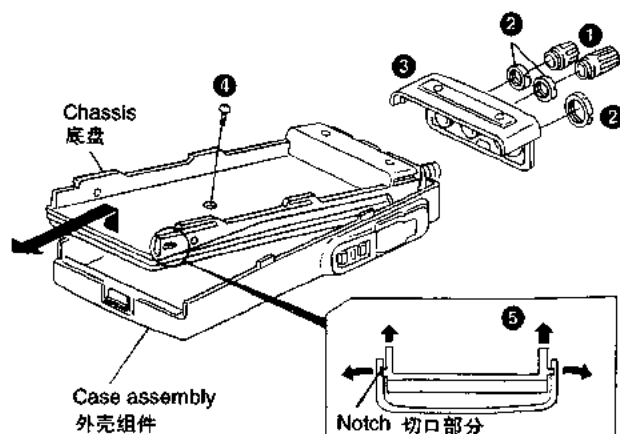

Separating the chassis from the unit


1. Remove the three screws ⑥.
2. Remove the one screw ⑦ and the fitting.
3. Remove the solder from the antenna terminal using a soldering iron and lift the unit off ⑧.
4. Remove the two screws ⑨ and remove the antenna connector.

Note: When reassembling the unit in the chassis, be sure to solder the antenna terminal.

底盘和装置的分离

1. 取下3个螺丝(⑥)。
2. 取下1个螺丝(⑦)并卸下安装配件。
3. 将钎焊烙铁贴到天线端子并边熔化焊锡边抬起装置(⑧)并卸下。
4. 取下2个螺丝(⑨)并卸下天线连接器。

注意: 将装置组装在底盘上时, 注意不要忘记锡焊天线端子。

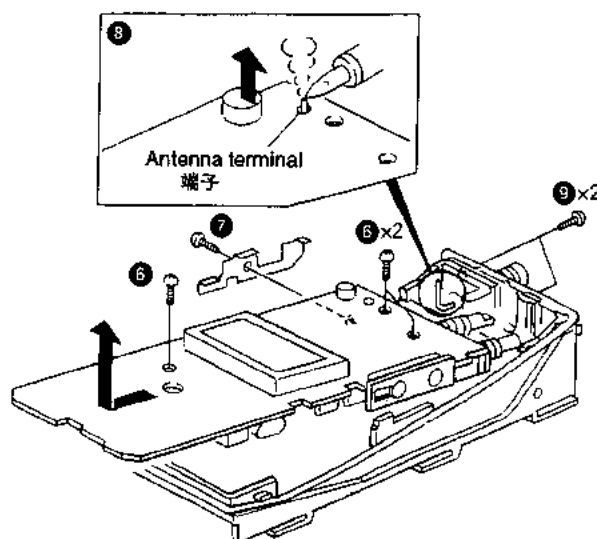

Removing the lever


1. Raise the lever on the lower case ⑩, insert a small normal screwdriver into the clearance between the case and lever, open the case carefully ⑪, and lift the lever off.

Note: Do not force to separate the case from the lever.

调节杆卸下方法

1. 用手指压下外壳下侧的调节杆(⑩)并在外壳与调节杆的间隙稍微插入小型-螺丝刀小心打开(⑪), 然后抬起调节杆并卸下。

注意: 请勿硬行撬开外壳与调节杆的间隙。

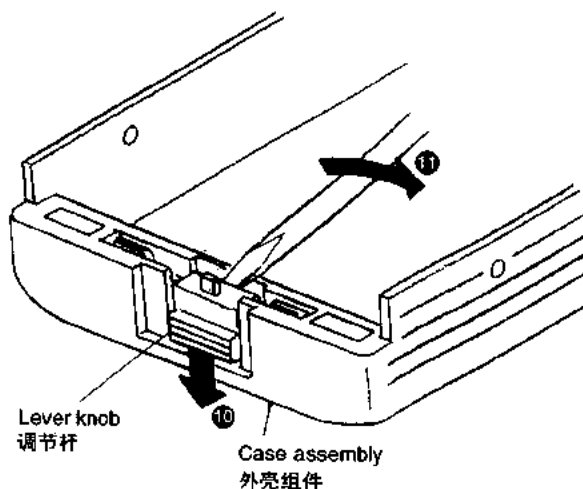

DISASSEMBLY FOR REPAIR / 为维修的拆卸

Protecting the ground terminal of the RF power amplifier


1. Take special care to prevent damage to the ground terminal of the RF power amplifier. Do not attach the silicon compound coated on the RF power amplifier to the ground terminal.

Note: If the silicon compound on the RF power amplifier attaches to other parts, wipe it off completely ⑫.

射频功率放大器周围的接地端子的保护

1. 由于射频功率放大器周围的接地端子易于变形，操作时需予以注意。另外，请注意不要让涂敷在射频功率放大器上的硅复合物附着在接地端子上。

注意：如果硅复合物附着在射频功率放大器上面以外的地方，请擦拭它(⑫)。

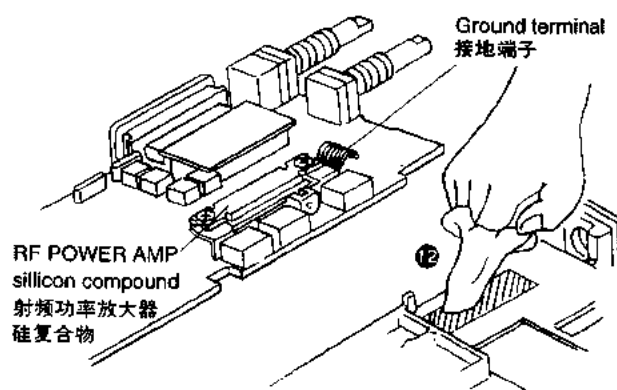


Assembling the case assembly and chassis

1. When assembling the chassis into the case assembly, insert the chassis claw into the hole in the case, and push in the chassis slowly ⑬.

2. Tighten the one screw ④.

Note: After assembling the chassis, check whether the claw shown in Fig. 15 fits into the notch in the case assembly. After installing the chassis, verify that the packing does not protrude to the outside ⑭.

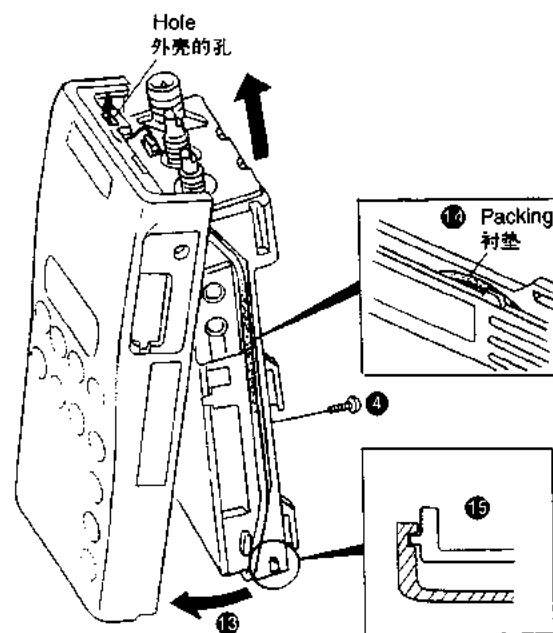

外壳组件和底盘的装配

1. 在将底盘组装在外壳组件时，要将底盘的卡爪对准外壳的孔，然后慢慢推入底盘(⑬)。


2. 紧固1个螺丝(④)。

注意：组装了底盘后，确认图(⑮)的卡爪有无确实进入切口部分。另外，还要确认组装了底盘后衬垫有无露出外面(⑭)。

Assembling the panel

1. When assembling the panel, push in the both sides of the case assembly with fingers ⑮, fit the claw on the panel into the notch in the case assembly, and tighten the round nut ⑰.

Note: If the claw does not fit into the notch in the case assembly, there will be a gap.

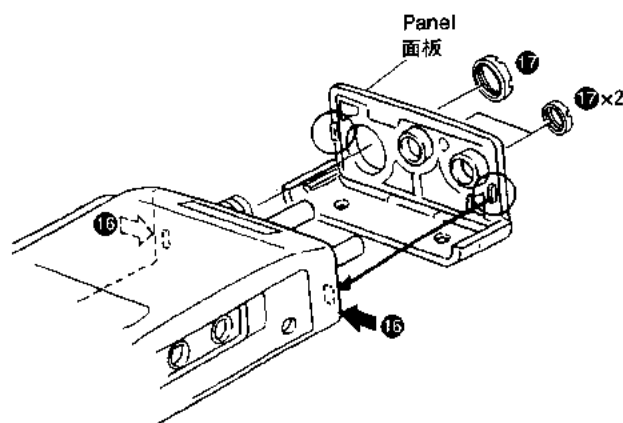

面板的组装

1. 组装面板时，边用手指将外壳组件的两侧(⑮)推向内侧，边对准外壳组件的凹孔和面板的卡爪并利用圆形螺母(⑰)加以紧固。

注意：如果面板的卡爪没有进入外壳组件的凹孔中，将会出现间隙。

TK-370/378


DISASSEMBLY FOR REPAIR / 为维修的拆卸

Speaker installation location

1. When installing the speaker, align the notch in the speaker with the line on the case assembly.
2. After determining the installation location, push in the speaker gently.

扬声器安装位置

1. 扬声器的安装位置通过将扬声器的切口部分对准外壳组件的线内的位置来决定。
2. 安装位置决定之后，轻轻推入扬声器。

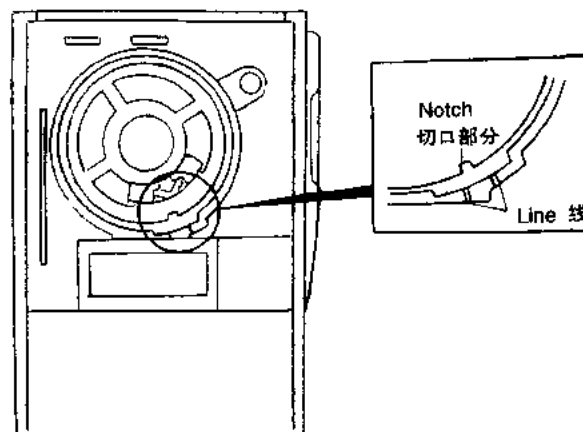


Do not lose the inter-connector.

Do not lose the inter-connector because it may fall when disassembling, reassembling, or adjusting the case assembly, chassis, or unit.

注意内部连接线的遗失

在进行外壳组件、底盘、装置的分离、组装、调整等时，由于有内部连接线掉下的可能性，需予以注意。

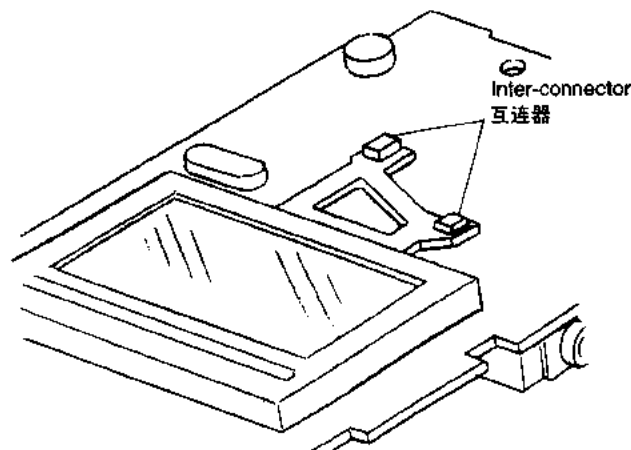

CIRCUIT DESCRIPTION/电路说明

1. FREQUENCY CONFIGURATION

The receiver utilizes double conversion. The first IF is 45.05 or 46.35 MHz and the second IF is 455 kHz. The first local oscillator signal is supplied from the PLL circuit.

The PLL circuit in the transmitter generates the necessary frequencies. Fig.1 shows the frequencies.

1. 电路构成

接收部采用二次变频超外差方式。第1中频为45.05MHz或46.35MHz，第2中频为455kHz，第1本振频率由锁相环(PLL)电路产生。

发射部由PLL电路直接产生所需要的频率。各频率如图1所示。

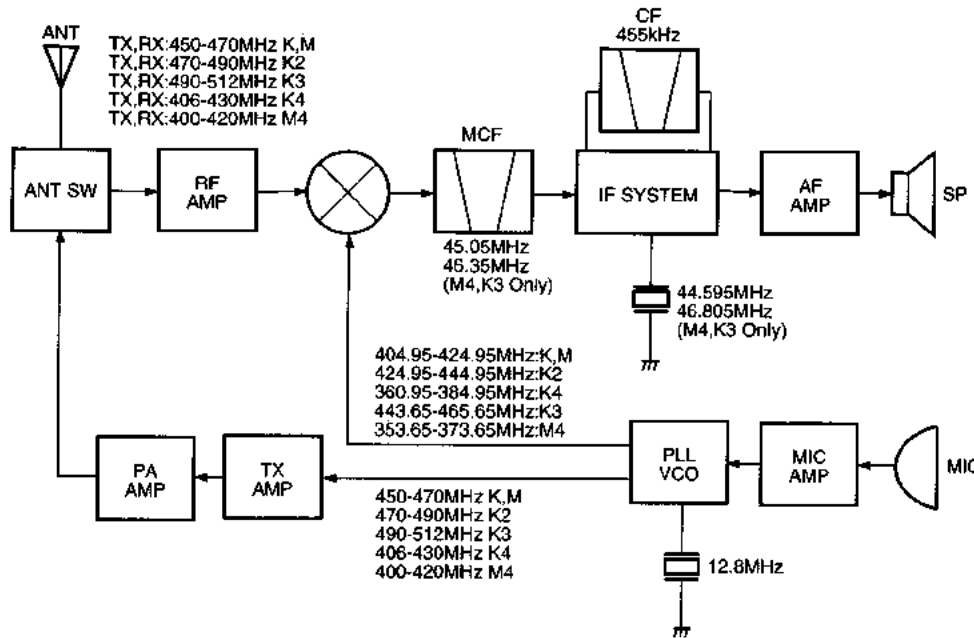


Fig. 1 Frequency configuration

2. RECEIVER SYSTEM

The frequency configuration of the receiver is shown in Fig. 2.

2. 接收部

接收部的简要构成如图2所示。

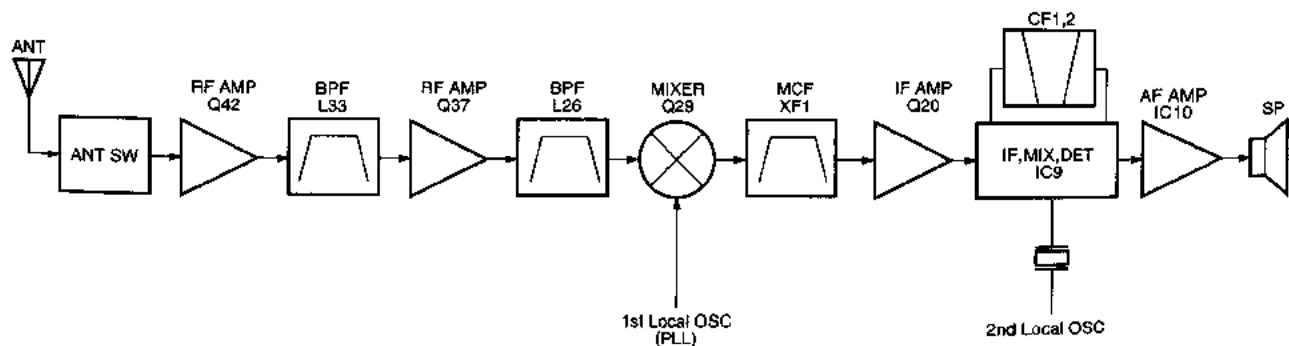


Fig. 2 Receiver section configuration

2-1 Front end (RF AMP)

The signal coming from the antenna passes through the transmit/receive switching diode circuit, is amplified by the RF amplifier (Q42), and passes through a BPF (L33). The resulting signal is further amplified by the RF amplifier (Q37), passes through a BPF (L26 and L24) and goes to the mixer.

The band-pass filters (L33 and L26) are two-pole helical resonators and are used together with the other low-pass filters to provide the necessary bandwidth and cut spurious.

2-2 First mixer

The signal from the front end is mixed with the first local oscillator signal generated in the PLL circuit by Q29 to produce a first IF frequency of 45.05 or 46.35 MHz.

The resulting signal passes through the XF1 MCF to cut the adjacent spurious and provide the optimum characteristics, such as adjacent frequency selectivity.

2-3 IF amplifier

The signal then passes through the first IF (Q20), and is amplified and goes to the IF IC (IC9). IC9 incorporates the functions of the second OSC, second mixer, second IF amplifier, detector, noise amplifier, and noise detector.

The signal input to the IC is mixed with the RF signal of the second OSC to produce a 455-kHz second IF signal. The signal is amplified by the IF amplifier. The signal passes through the ceramic filters (CF1 and CF2) to provide the necessary selectivity.

Finally, the signal is detected by the IC and output as an AF signal.

2-1 前级(射频放大器)

从天线输入的接收信号经过由二极管构成的收发转换电路, 在射频放大器(Q42)被放大。然后通过由L33构成的带通滤波器(BPF), 在Q37(射频放大器)被进一步放大, 再通过一个带通滤波器(L26)后进入混频器。

L33和L26带通滤波器是2级螺旋谐振器, 和其它的低通滤波器等电路配合共同保证必要的带宽和杂波抑制特性。

2-2 第1混频器

来自前级的信号在Q29与来自锁相环(PLL)电路的第1本振信号混频, 产生第1中频信号(45.05MHz或46.35MHz)。

产生的中频信号通过晶体滤波器(XF1)滤除邻近的杂波信号, 以确保邻道选择性等必要的技术指标。

2-3 中频放大器(IF AMP)

通过了晶体滤波器的信号被第1中频放大器(Q20)放大后进入中频集成电路(IC9)。IC9是集第2本振、第2混频器、第2中频放大器、鉴频器、噪声放大器、噪声整流电路为一体的集成电路芯片。

进入集成电路的信号与第2本振信号混频, 产生455kHz的第2中频信号, 第二中频信号经过中频放大器放大之后再通过陶瓷滤波器(CF1、CF2)滤波, 以保证必要的选择性。

最后, 通过滤波器的中频信号在集成电路内经鉴频产生音频信号输出。

CIRCUIT DESCRIPTION/电路说明

2-4 AF amplifier

The AF signal from the IF IC is amplified by IC8 (1/2) and passes through the high-pass filter (Q25 and Q28) to remove 300 Hz and lower frequencies to suppress the sub-audio signal.

The signal then passes through the de-emphasis circuit to restore the audio frequency characteristics. The signal passes through AF VOL and enters the IC12 audio power amplifier to drive the speaker. (See Fig. 3.)

2-5 Squelch

Part of the AF signal from the IC enters the FM IC again, and the noise component is amplified and rectified by a filter and an amplifier to produce a DC voltage corresponding to the noise level.

The DC signal from the FM IC goes to the analog port of the microprocessor (IC1). IC1 determines whether to output sounds from the speaker by checking whether the input voltage is higher or lower than the preset value.

To output sounds from the speaker, IC1 sends a high signal to the MUTE and AFCO lines and turns IC12 on through Q31, Q41, Q36, and Q35. (See Fig. 3.)

2-6 Receive signaling

1) QT/DQT (The TK-370 only DQT.)

300 Hz-and-higher audio frequencies of the signal output from IF IC are cut by a low-pass filter (IC14). The resulting signal enters the microprocessor (IC1). IC1 determines whether the QT or DQT matches the preset value, and controls the MUTE and AFCO and the speaker output sounds in line with the squelch results of that content.

2-4 音频放大器 (AF AMP)

从中频集成电路输出的音频信号经 IC8 (1/2) 放大, 再通过由 Q25 和 Q28 组成的高通滤波器 (HPF) 滤除 300Hz 以下的信号, 以防止听到亚音频信号。

通过高通滤波器的信号再经过去加重电路使音频信号恢复原来的频率特性。然后, 音频信号通过音量控制电路 (AF VOL), 再由音频功率放大器 (IC12) 放大后驱动扬声器。(见第 3 图)

2-5 静噪

从中频集成电路输出的音频信号的一部分再次进入调频集成电路, 通过滤波器和放大器对其噪声分量放大, 再对噪声分量进行整流, 产生一个和噪声分量相对应的直流电压。调频集成电路输出此直流信号到微处理器 (IC1) 的模拟端口。输入的直流电压和一个预先设置的电压值比较大小, IC1 根据比较结果控制开放或关闭扬声器的输出。

当扬声器发出声音时, MUTE 及 AFCO 线被置为 (HI) 高电平, 通过 Q31 和 Q41 以及 Q36、Q35 使 IC12 的电源成为接通 (ON) 状态, 扬声器发出声音。(见第 3 图)

2-6 接收信令

1) CTCSS 信令/亚音数码信令

(QT/DQT, DQT 仅适用于 TK-370 型)

中频集成电路输出的部分信号经过低通滤波器 IC14 (LPF) 使 300Hz 以上的音频信号被滤除, 然后输入到微处理器 (IC1), IC1 根据内部的各种处理判断接收的亚音频或亚音数码 (QT 或 DQT) 是否与被预先设定的值一致, 其判断结果和噪声静噪的判断结果一起控制 MUTE 及 AFCO, 由此控制扬声器的输出。

2) DTMF

The part of the received AF signal passes through a high-pass filter (Q25 and Q28) and goes to IC3.

IC3 detects a DTMF signal and sends received DTMF data to IC1. IC1 carries out various operations, such as sound output, according to the DTMF data.

3) 2-TONE (The TK-370 only 2-TONE.)

Part of the receive AF signal output from the AF amplifier (IC8 1/2) goes to the other IC8 (1/2), is compared, and goes to IC1. IC1 checks whether 2-TONE data is necessary. If it matches, IC1 carries out a specified operation, such as turning the speaker on. (See Fig. 3.)

2) 双音多频 (DTMF)

接收的音频信号通过由Q25、Q28组成的高通滤波器 (HPF) 后, 部分信号被输入到IC3。IC3是DTMF信号检测专用集成电路, 然后将所接收的DTMF的数据送到IC1, 而IC1将根据该数据决定是否释放扬声器输出的编码控制。

3) 双音信令 (2-TONE) (仅适用于TK-370型)

接收的音频信号经过音频放大器 (IC8 1/2) 后, 一部分信号输入到IC8 (1/2) 另一部分电路中, 经比较后被输入到IC1, 在IC1内判断是否是与本机设定一致的两音数据。当判断是一致时, IC1发出解除扬声器输出的两音编码控制的指令。(见第3图)

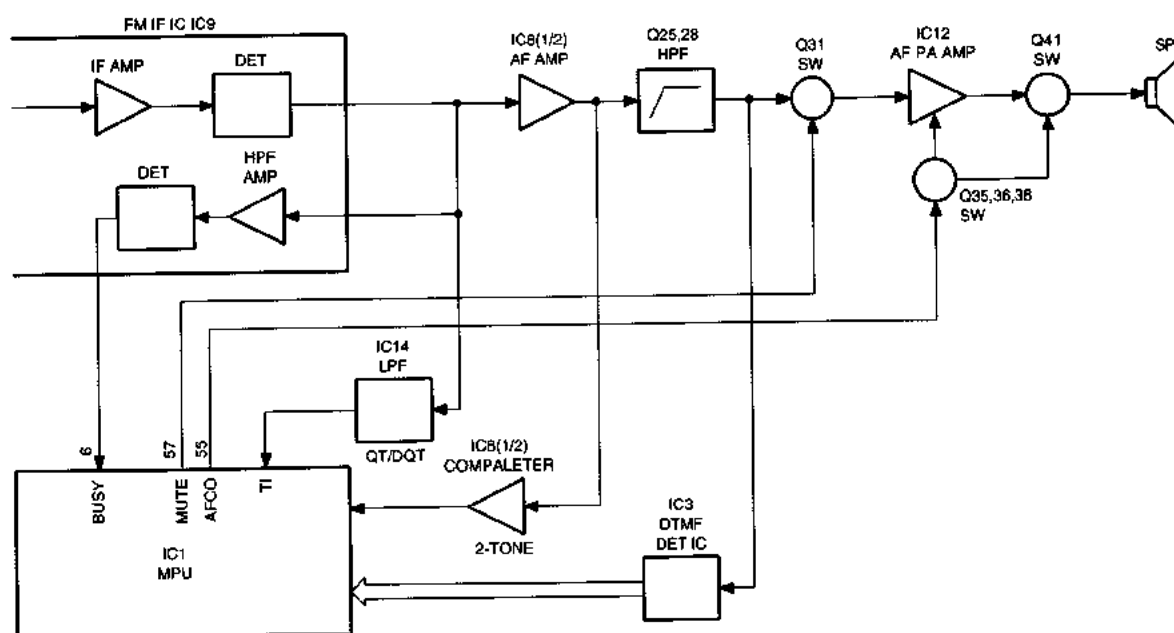


Fig.3 AF Amplifier and Squelch

CIRCUIT DESCRIPTION/电路说明

3. PLL

The PLL circuit generates the first local oscillator signal for reception and the RF signal for transmission.

3-1 PLL

The receiver has a VCO (Q15), and the transmitter has another VCO (Q18). Figure 2 shows the VCO frequencies.

The generated signal passes through the Q21 buffer and Q14 amplifier and enters the IC6 PLL IC. IC6 incorporates the reference oscillation divider and phase comparator functions. The input signal is divided into a 5- or 6.25-kHz signal according to the divide ratio data from the microcomputer (IC1). This signal and the 5- or 6.25-kHz signal divided from the reference signal enter the phase comparator to produce a differential signal. The frequency control signal is output from the charge pump.

This signal passes through the passive LPF and goes to the varicap to control the VCO frequency. (See Fig. 4.)

3. 锁相环(PLL)电路

PLL电路产生接收机的第1本振信号和发射机的射频载波信号。

3-1 PLL

接收和发射分别具有单独的压控振荡器(VCO)。接收用压控振荡器以Q15为中心构成,发射用压控振荡器以Q18为中心构成,振荡频率如第1图所示。

振荡信号通过Q21缓冲器,再通过Q14放大器进入IC6 PLL集成电路。

IC6是包括了基准振荡分频器、相位比较器的集成电路,输入的振荡信号经过按微处理器(IC1)指定的分频比分频,成为5kHz或6.25kHz信号,然后和对基准振荡器分频而产生的5kHz或6.25kHz信号一起加到相位比较器进行相位比较,从而产生一个相位差信号,此相位差信号经电荷泵产生一个频率控制信号。

该控制信号通过无源低通滤波器(LPF)后加到VCO的变容二极管上以控制其输出频率。(参见第4图)

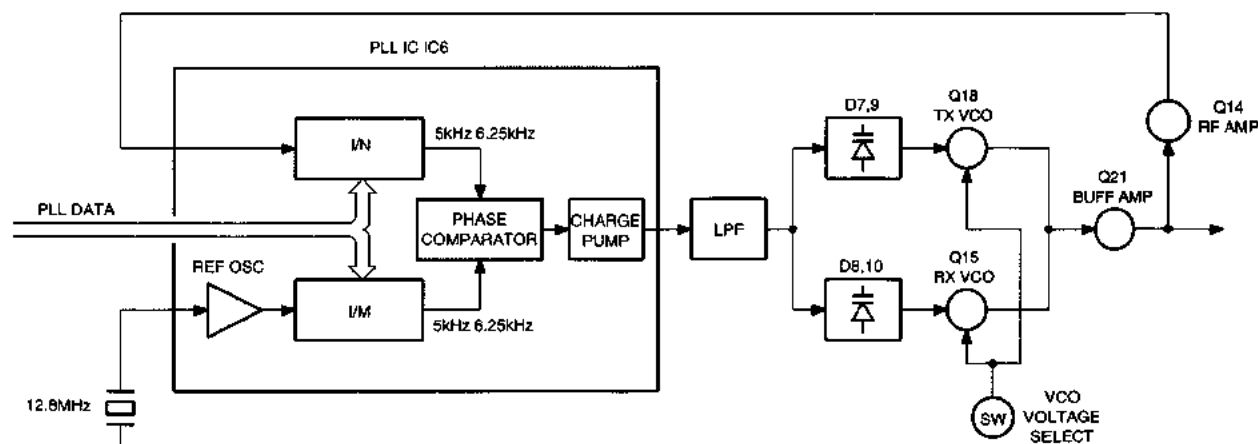


Fig.4 PLL circuit

3-2 Reference oscillator circuit

The reference oscillator circuit in the PLL IC produces the 12.8-MHz PLL reference frequency. To stabilize the frequency, the characteristics of the 12.8-MHz crystal oscillator are controlled and the frequency is temperature-compensated.

It is compensated for by changing the DC voltage applied to D4. Changes in the ambient temperature are input to the analog port of IC1 using the TH3 thermistor. IC1 judges the temperature and outputs a voltage to the TC1, TC2, or TC3 port.

The temperature compensation value is corrected according to the differences in the characteristics of the thermistors in the TC1, TC2, and TC3 circuits. The temperature compensation is carried out when the temperature is -10°C or less.

3-2 基准振荡器

锁相环的基准信号是PLL集成电路内部振荡电路产生的12.8MHz振荡信号。为了确保频率稳定度,采用经过特性选择的12.8MHz晶体,并且采取了如下的温度补偿措施。

频率的温度补偿是通过改变加到D4上的直流电压实现的。利用热敏电阻TH3的热敏特性感应周围温度的变化,感应的信号被加到IC1的模拟端口,IC1判断温度后对TC1、TC2、TC3中的某一点施加电压。

根据TC1、2、3所在的各个电路的热敏特性的不同产生相应的温度补偿值。补偿在约 -10°C 以下的低温进行。

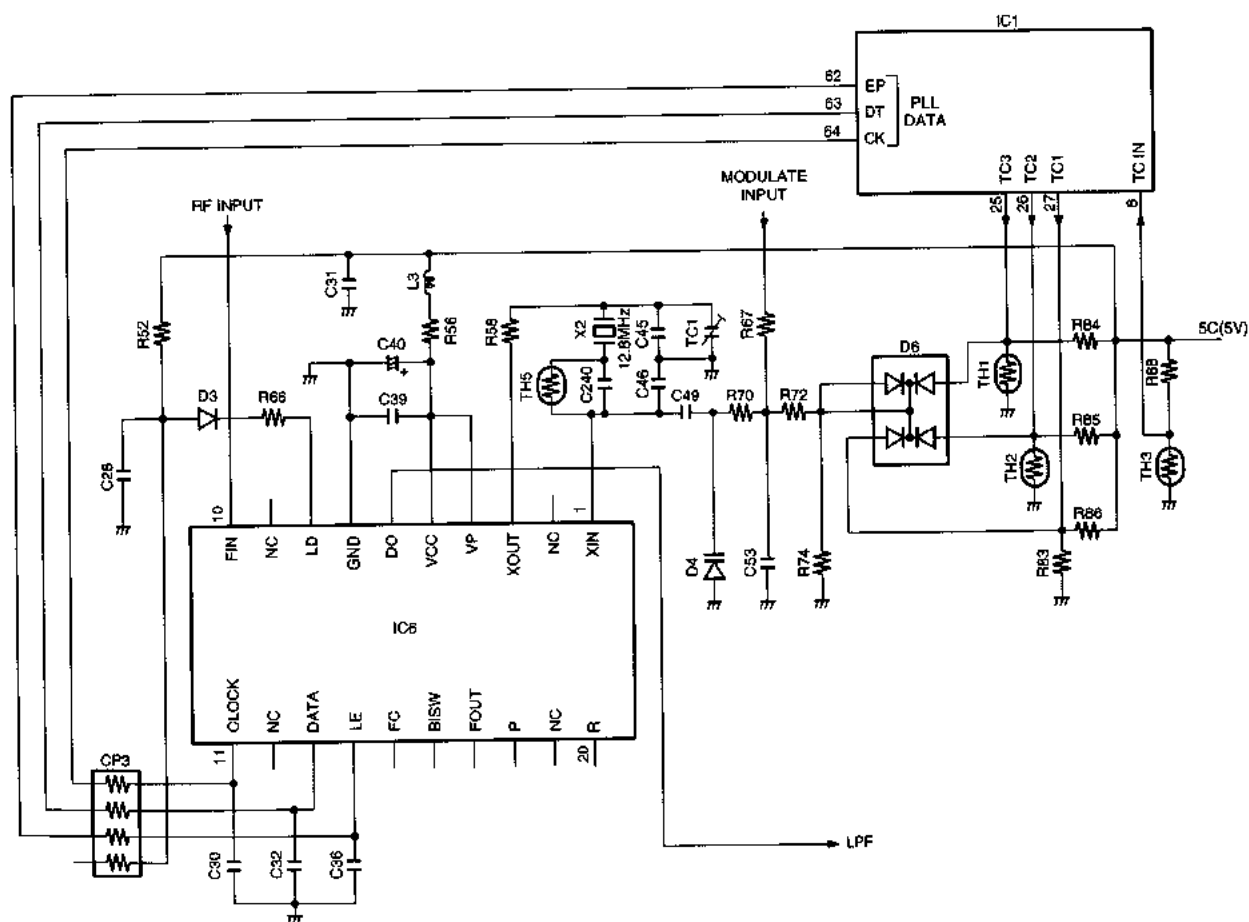


Fig.5 Referend Oscillator circuit

CIRCUIT DESCRIPTION/电路说明

4. TRANSMITTER

4-1 Transmit audio

The modulation signal from the microphone is amplified by IC10 (1/2), passes through a preemphasis circuit, and is amplified by the other IC10 (1/2) to perform IDC operation.

The signal then passes through a low-pass filter (splatter filter) (Q22 and Q16) and cuts 3 kHz and higher frequencies. The resulting signal goes to the VCO through the VCO modulation terminal for direct FM modulation.

4-2 QT/DQT encoder (The TK-370 only DQT.)

A necessary signal for QT/DQT encoding is generated by IC1 and is FM-modulated to the PLL reference signal. Since the reference OSC does not modulate the loop characteristic frequency or higher, modulation is performed at the VCO side by adjusting the balance.

4-3 DTMF

The DTMF encode signal is also generated by IC1. This signal goes to IC10, and follows the same route as for ordinary modulation.

Q39 mutes the microphone line when sending the DTMF to prevent a malfunction resulting from audio signals. (See Fig. 6.)

4. 发射部

4-1 发射音频

由话筒输入的调制信号在IC10 (1/2)的一部分电路中被放大并经过预加重处理, 然后在IC10 (1/2)的另一部分电路中再被放大限幅, 至此完成了对输入信号的瞬时频偏控制(IDC)。

然后, 通过由Q22、Q16组成的低通滤波器(邻道干扰滤波器)滤除信号中3 kHz频率以上的部分, 再从VCO的调制端子进入VCO进行直接频率调制(FM)。

4-2 CTCSS信令/亚音数码信令编码器

(QT/DQT编码, DQT仅适用于TK-370)

CTCSS/亚音数码的编码是由IC1产生所需要的信号, 该信号在PLL的基准振荡器被调频。因为在基准振荡器不能对频率环路特性以外的频率进行调制, 因此, 一部分频率较高的信号通过分配器在VCO进行频率调制。

4-3 DTMF

DTMF的编码信号也在IC1产生。IC1产生的信号进入IC10, 以后的过程与普通的调制过程相同。

在发射DTMF号码期间, 在Q39对话筒输入实行静音, 防止因拾取声频信号而造成的误动作。(见第6图)

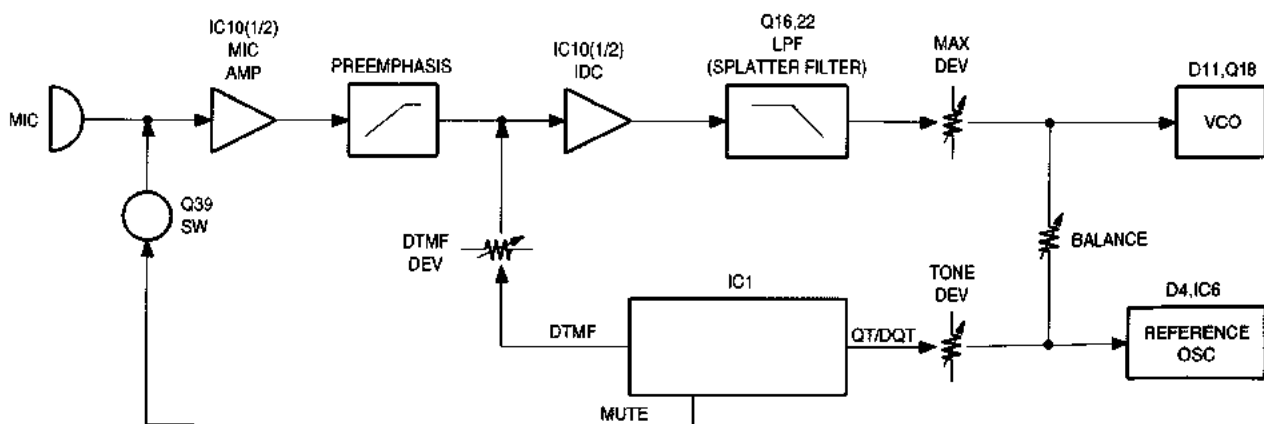


Fig.6 Transmit audio and QT/DQT

4-4 VCO and RF amplifier

The modulation signal is modulated to VCO by D11. The RF signal from the PLL is amplified by Q26, Q30, and Q32 to the sufficient level to drive the power module.

4-5 Final module

The MOS FET-type power module (IC11) is used to amplify the transmission power.

4-6 ANT switch and LPF

The signal from the module passes through the D19 SW and L40 LPF and is output from the ANT terminal. D19, D20, and D21 are used to switch between transmission and reception. The chip-type LPF is used to provide required attenuation.

4-7 APC

The APC keeps the current constant to the final module. The current to the final module is output as a voltage by detecting the potential difference between R218, R220, and R223 by IC13 (1/2). IC13 (1/2) compares the signal with the APC voltage from IC1 and controls the voltage so that they have the same value. The output becomes the IC11 power control voltage, and the current is kept constant in this loop.

The APC voltage from IC1 has the preset high or low power level. (See Fig. 7.)

4-4 VCO及射频放大器

调制信号在D11对VCO输出信号进行调制。PLL输出的射频信号在Q26、Q30、Q32被放大,以达到末级功率放大器所需要的激励电平。

4-5 末级功率放大器

功率放大采用MOS FET末级功率放大器(IC11)。

4-6 天线(ANT)转换及低通滤波器(LPF)

末级功率放大器输出的信号通过D19二极管一个和低通滤波器(L40)后从天线端子发射出去。Q19和D20与D21一起构成了收发转换电路。低通滤波器采用了片状元件,保证有足够的衰减量。

4-7 自动功率控制电路(APC电路)

自动功率控制电路的作用是使流入末级功率放大器的电流为恒定值。IC13(1/2)检测流入末级的电流在R218、220、223上产生电位差,输出一个电压信号。此电压信号在IC13(1/2)中与IC1提供的APC电压相比较,始终控制此信号的电压值和APC电压值相同,把控制输出电压作为IC11的功率控制电压,此闭合回路的作用使电流成为恒定值。

IC1提供的APC电压对应于预先设定的高(HI)/低(LOW)功率的电压。(见第7图)

CIRCUIT DESCRIPTION/电路说明

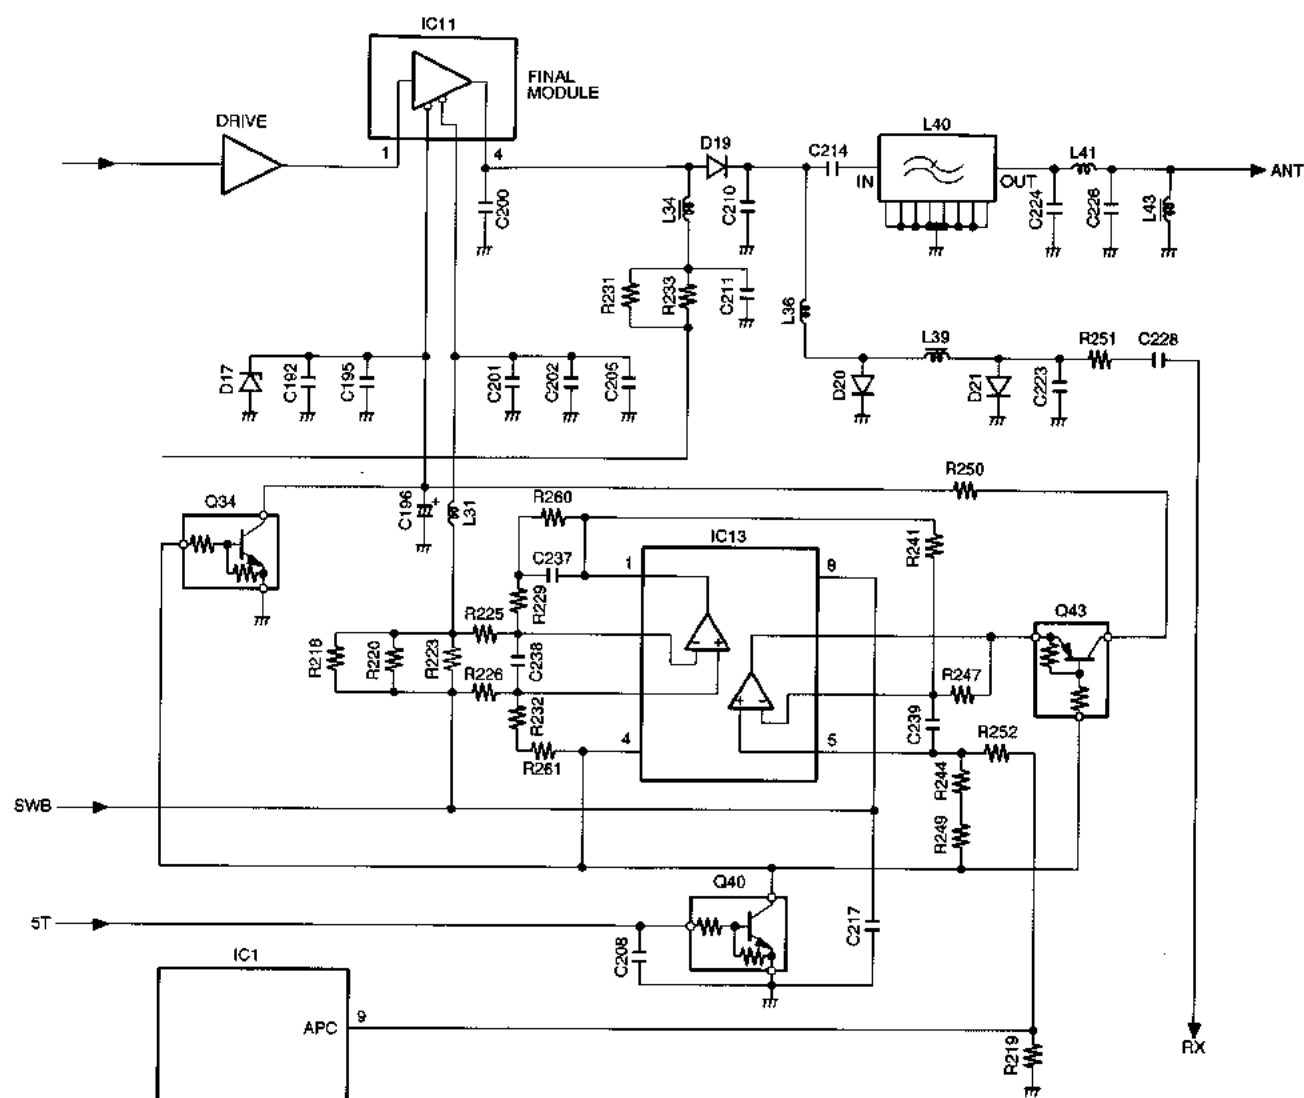


Fig.7 APC

5. POWER SUPPLY

There are five 5V power supplies for the microcomputer: 5V, 5M, 5C, 5R, and 5T. 5V for the microcomputer is always output while the power is on. 5M is always output, but turns off when the power is turned off to prevent a malfunction of the microcomputer.

5C is common 5V and is output when SAVE is not set at OFF.

5R is 5V for reception and is output during reception.

5T is 5V for transmission and is output during transmission.

6. CONTROL SYSTEM

The IC1 CPU operates at 8.38-MHz clocks. This oscillator has a circuit that shifts the frequency according to EEPROM data.

IC1 controls the LCD driver and keys.

• Keys and rotary encoder circuit

The signal from keys and rotary encoder input to microprocessor directly as shown in Figure 8.

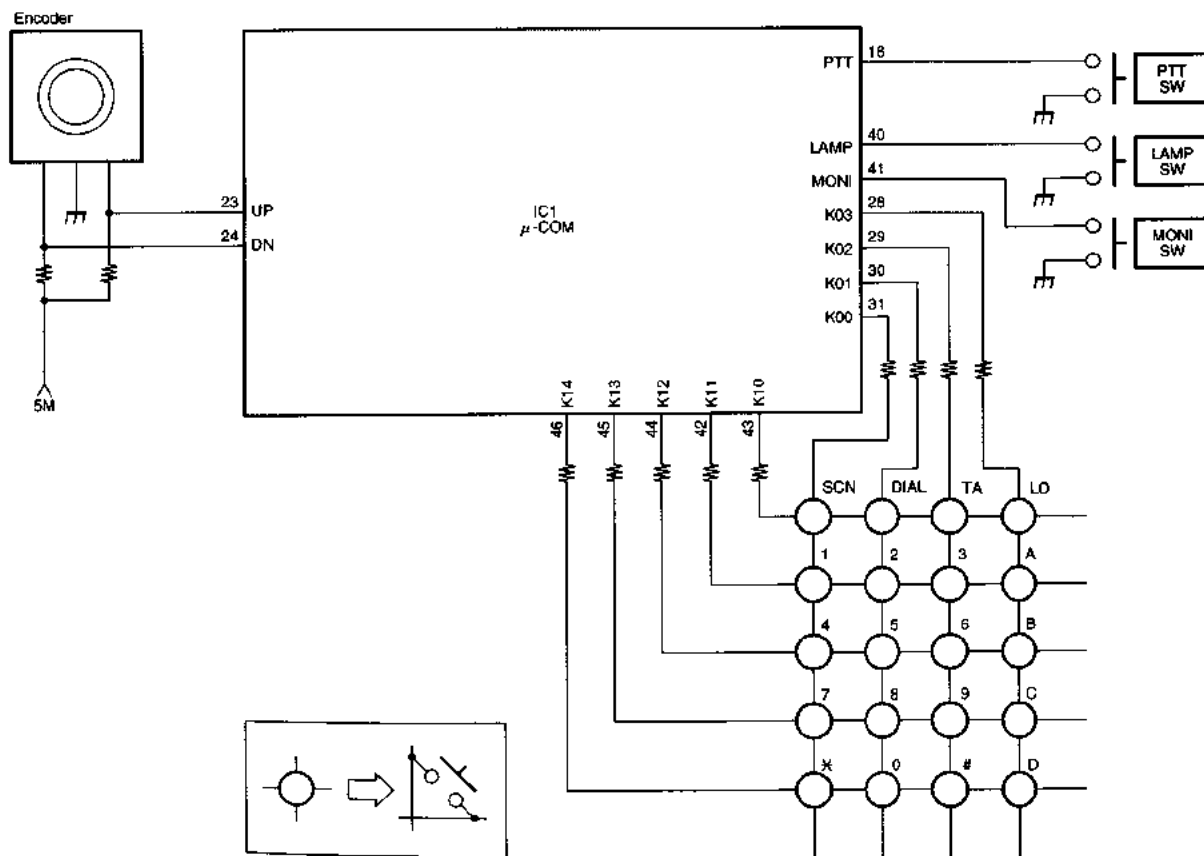


Fig.8 Keys and rotary encoder circuit

5. 电源

5V电源系统有微处理器用的5V、5M、5C、5R、5T共5种。微处理器用的5V—接通电源马上就产生输出。5M是普通输出，但一关闭电源开关，此输出同时关闭，以防止微处理器系统产生误动作。

5C为共用的5V电源，在电池省电功能中，除“休眠”状态以外输出。

5R为接收用5V电源，在接收时输出。

5T为发射用5V电源，在发射时输出。

6. 控制系统

IC1中央处理器(CPU)以8.38MHz的时钟工作，该振荡器具有根据EEPROM的数据使频率偏移的电路。

IC1独立进行LCD的驱动、键控制处理。


• 键和旋转编码器的电路

如图8所示，来自键和编码旋钮的信号直接被输入到微处理器。

SEMICONDUCTOR DATA

Microprocessor : M38267M8L150GP (IC1)

● Pin connection diagram

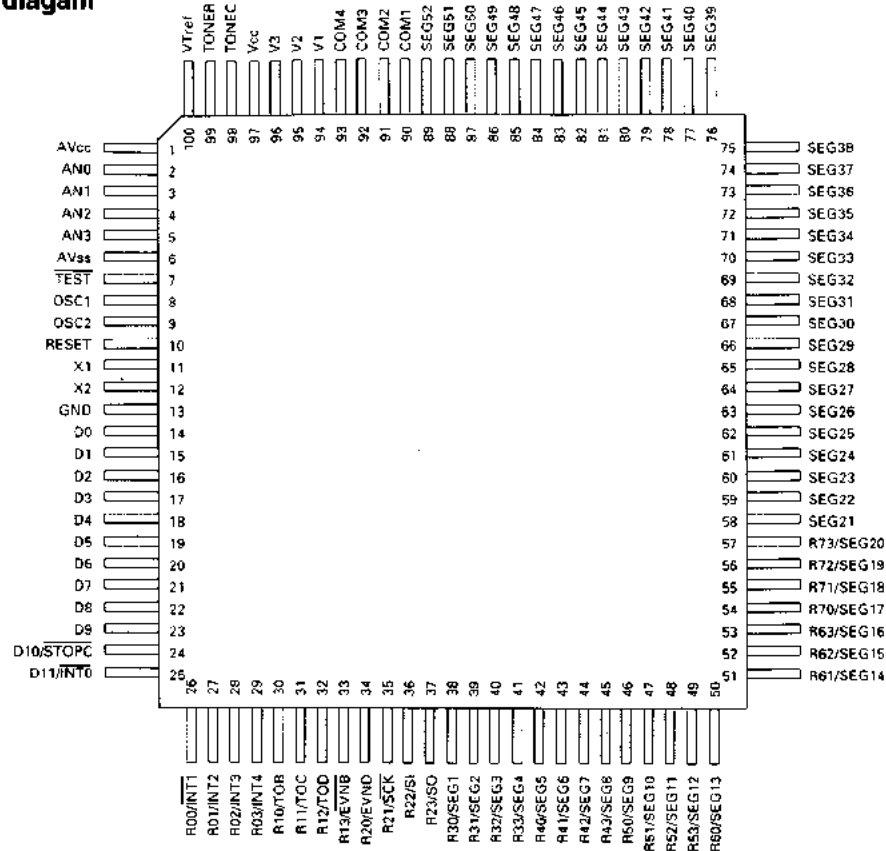


● Pin function

Pin No.	Port name	I/O	aFunction
1	UL	I	PLL unlock detection pin
2	SD	I	Serial data from DTMF IC
3	PD	O	DTMF IC power down pin H : Power down
4	TIB1	I	QT/DQT external circuit center point input
5	TI	I	QT/DQT signal input
6	BUSY	I	Busy input
7	BATT	I	Battery voltage detection
8	TCIN	I	TCXO voltage input
9	APC	O	Auto power control D/A output
10	DTMF	O	DTMF output
11	2TN	I	2-tone signal input pin
12	REQ	I	Data input from SmarTrunk II™ module
13	SDT	I	Acknowledge input from SmarTrunk II™ module
14	RDY	O	Ready signal output to SmarTrunk II™ module
15	EXTRA	O	AUX output
16	TO	O	QT/DQT output
17	L/K	I	[LAMP] + [key] enable judgment
18	PTT	I	[PTT] key input Connected to RXD
19	TXD	O	RS-232C output Connected to SP/mic test (REM)
20	RXD	I	RS-232C input Connected to [PTT] line
21	4.19	O	8.38/2=4.19 MHz output
22	STD	I	Signal input interrupt from DTMF IC
23	UP	I	Encoder input
24	DN	I	Encoder input
25	TC3	O	Switch port for temperature correction
26	TC2	O	Switch port for temperature correction

Microprocessor : M38267M8L150GP (IC1)

● Pin connection diagram

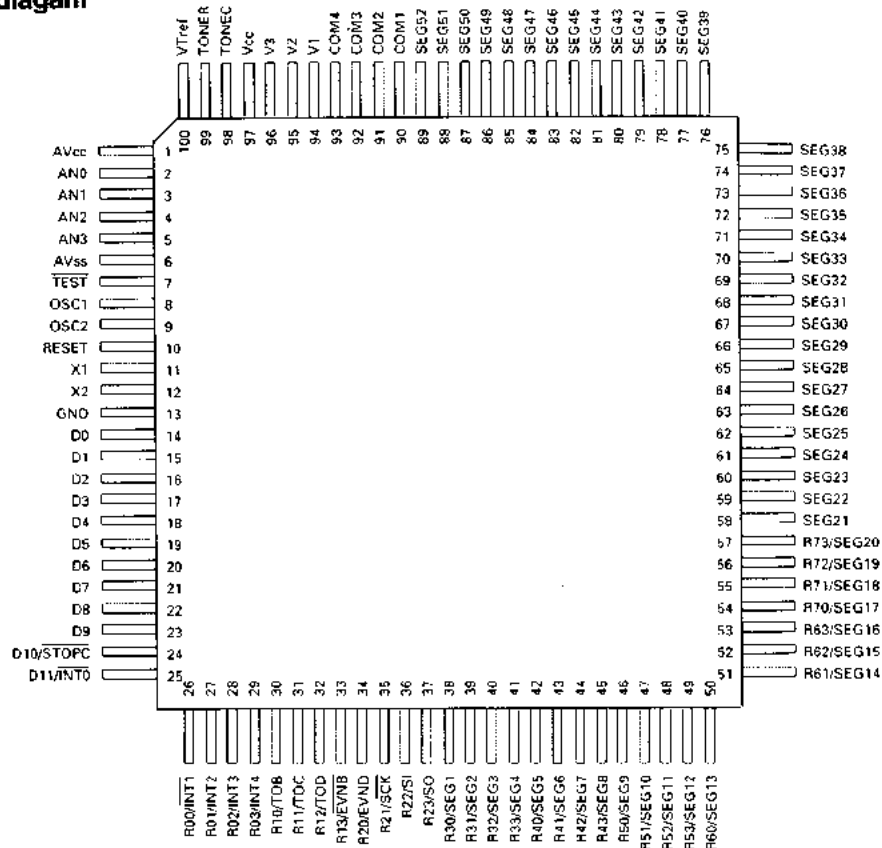

● 端子功能

引脚号	电路端子名称	输入/输出	功能
1	UL	I	PLL UNLOCK检测端子
2	SD	I	来自DTMF IC的串行数据
3	PD	O	DTMF IC的停电端子 H...停电
4	TIBI	I	QT/DQT外部电路中点输入
5	TI	I	QT/DQT信号输入
6	BUSY	I	BUSY输入
7	BATT	I	电池电压检测
8	TCIN	I	TCXO电压输入
9	APC	O	自动电源控制D/A输出
10	DTMF	O	DTMF输出
11	2TN	I	双音调信号输入端子
12	REQ	I	输入来自Smar Trunk II™模块的数据
13	SDT	I	输入来自Smar Trunk II™模块的确认
14	RDY	O	输出向Smar Trunk II™模块的READY信号
15	EXTRA	O	AUX输出
16	TO	O	QT/DQT输出
17	L/K	I	(LAMP)+(按键)的允许判定
18	PTT	I	(PTT)键输入与RXD连接
19	TXD	O	RS-232C输出连接到扬声器/传声器的TEST(REM)
20	RXD	I	RS-232C输入与(PTT)线路连接
21	4.19	O	8.38/4.19MHz输出
22	STD	I	来自DTMF IC的信号输入中断
23	UP	I	编码器输入
24	DN	I	编码器输入
25	TC3	O	温度补偿用SW端口
26	TC2	O	温度补偿用SW端口

SEMICONDUCTOR DATA


Pin No.	Port name	I/O	Function
27	TC1	O	Switch port for temperature correction
28	KO3	O	Key matrix output Nch open drain output
29	KO2	O	Key matrix output Nch open drain output
30	KO1	O	Key matrix output Nch open drain output
31	KO0	O	Key matrix output Nch open drain output
32	INT0	I	Microcomputer stop input
33	RESET	I	Microcomputer reset pin
34	NC	I	Not connected
35	NC	O	Not connected
36	XIN	I	8.388608 MHz oscillator
37	XOUT	O	8.388608 MHz oscillator
38	VSS	-	Ground
39	BS	O	Beet shift pin H : Shift
40	LAMP	I	[LAMP] key input
41	MONI	I	[MONI] key input
42	KI1	I	Key matrix input
43	KI0	I	Key matrix input
44	KI2	I	Key matrix input
45	KI3	I	Key matrix input
46	KI4	I	Key matrix input
47	S/F	I	Simple plate/multi-function plate judgment H : Multi-function plate
48	SDA	I/O	EEPROM data line
49	ECK	O	EEPROM clock line
50	SAVE	O	Battery save line (5C) control H : Save off L : Save on
51	5MC	O	Control of power supply (5M) for other than microcomputer and EEPROM L : Power supply on
52	5TC	O	Transmission power supply (5T) control H : Power supply on
53	RX	O	TX/RX VCO select H : RX L : TX
54	5RC	O	Reception power supply (5R) control H : Power supply on
55	AFC0	O	AF amp power supply H : Power supply on
56	NC	O	Not connected
57	MUTE	O	Reception audio mute and mic mute H : Mic mute L : Reception audio mute
58	RED	O	Red LED control H : Lit
59	GRN	O	Green LED control H : Lit
60	LAMP	O	LCD lamp control H : Lit
61	NC	O	Not connected
62	EP	O	PLL IC enabled PLL IC latches data when this signal high
63	DAT	O	Common data output
64	CLK	O	Common clock output
65 ~ 88	S23 ~ S0	O	LCD segment
89	VDD	-	Microcomputer power supply, 5V input
90	VREF	I	A/D conversion reference voltage, connected to Vcc
91	AVSS	I	A/D converter power supply; connected to Vss
92	NC	O	Not connected
93	COM2	O	LCD common
94	COM1	O	LCD common
95	COM0	O	LCD common
96	VL3	I	LCD drive power supply Vcc
97	VL2	I	2/3 VL3
98	NC	I	Not connected
99	NC	I	Not connected
100	VL1	I	1/3 VL3

引脚号	电路端子名称	输入/输出	功 能
27	TC1	O	温度补偿用SW端口
28	KO3	O	键矩阵输出 Nch开式漏漏输出
29	KO2	O	键矩阵输出 Nch开式漏漏输出
30	KO1	O	键矩阵输出 Nch开式漏漏输出
31	KO0	O	键矩阵输出 Nch开式漏漏输出
32	INT0	I	微计算机停止输入
33	RESET	I	微计算机复位端子
34	NC	I	NC
35	NC	O	NC
36	XIN	I	8.388608MHz振子
37	XOUT	O	8.388608MHz振子
38	VSS	—	GND
39	BS	O	BEET SHIFT 端子 H...SHIFT
40	LAMP	I	(LAMP) 键输入
41	MONI	I	(MONI) 键输入
42	KI1	I	键矩阵输入
43	KI0	I	键矩阵输入
44	KI2	I	键矩阵输入
45	KI3	I	键矩阵输入
46	KI4	I	键矩阵输入
47	S/F	I	简易版/多功能版的判定 H...多功能版
48	SDA	I/O	E ² PROM数据线路
49	ECK	O	E ² PROM时钟线路
50	SAVE	O	电池节约线路(5C)控制 H...节约OFF L...节约ON
51	5MC	O	微计算机、E ² PROM以外电源(5M)的控制 L...电源ON
52	5TC	O	发射系电源(5T)控制 H...电源ON
53	RX	O	TX/RX VCO转换 H...RX L...TX
54	5RC	O	接收系电源(5R)控制 L...电源ON
55	AFCO	O	AF放大器电源 H...电源ON
56	NC	O	NC
57	MUTE	O	接收音频的静音和传声器静音 H...传声器静音 L...接收音频静音
58	RED	O	红色LED控制 H...发亮
59	GRN	O	绿色LED控制 H...发亮
60	LAMP	O	LCD照明用灯的控制 H...发亮
61	NC	O	NC
62	EP	O	PLL IC允许 PLL IC在H锁存数据
63	DAT	O	共同数据输出
64	CLK	O	共同时钟输出
65~88	S23~S0	O	LCD字段
89	VDD	—	微计算机电源。5V输入
90	VREF	I	A/D转换基准电压。与Vcc连接
91	AVSS	I	A/D转换器电源。与Vss连接
92	NC	O	NC
93	COM2	O	LCD共同
94	COM1	O	LCD共同
95	COM0	O	LCD共同
96	VL3	I	LCD驱动电源 Vcc
97	VL2	I	2/3VL3
98	NC	I	NC
99	NC	I	NC
100	VL1	I	1/3VL3


IC数据

Power module : M68732H (K, M) (IC11)
: M68732L (K4, M4)
: M68732SH (K2)
: M68732UH (K3)

• **Equivalent circuit**

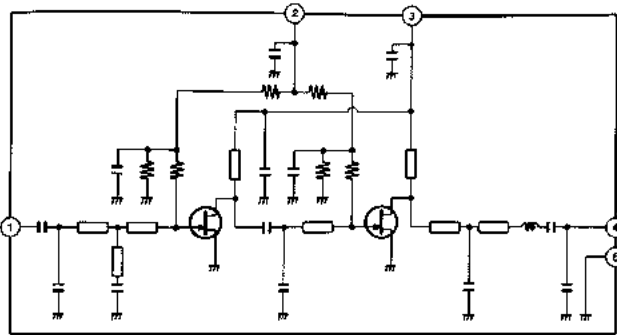

• **External view**

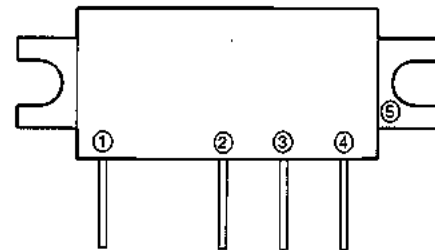


• **Electrode configuration**


1. Input pin
2. GATE, BIAS Power supply pin
3. Drain bias power pin
4. Output pin
5. Fin (earth)

APC : NJM2904V (IC13)


• **Pin connection diagram**

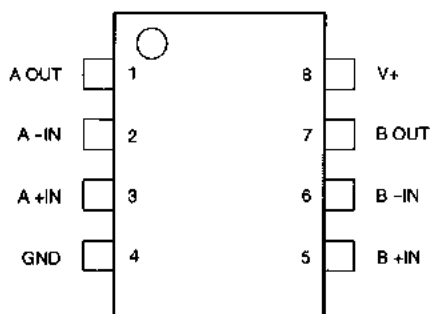

• **External view**

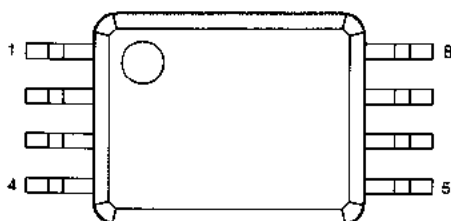

• **Equivalent circuit**

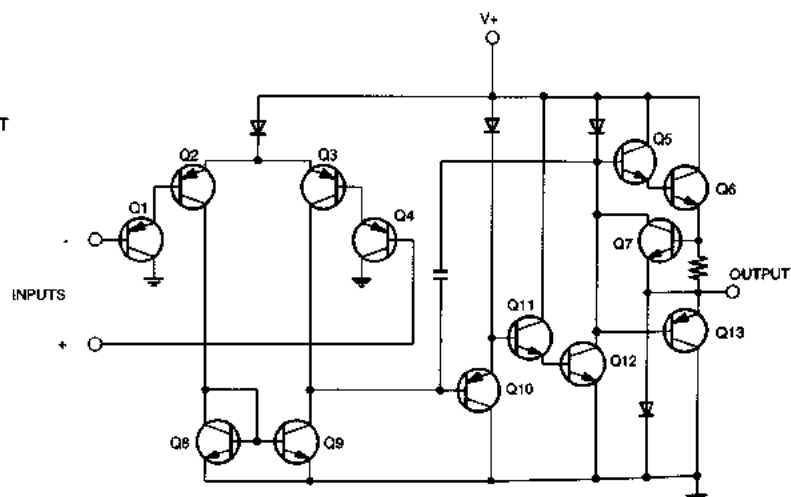

DESCRIPTION OF COMPONENTS

TX-RX UNIT (X57-4860-XX)

Ref. No.	Parts No.	Description
IC1	M38267M8L150GP	IC, MICRO PROCESSOR
IC2	PST9140NR	IC, RESET SWITCH
IC3	LC73881M	IC, DTMF DECODER
IC4	AT2408N10SI2.5	IC, EEPROM
IC5	RN5VL45C	IC, VOLTAGE DETECT
IC6	LMX1511TMX	IC, PHASE LOCKED LOOP SYSTEM
IC7	S-81350HG-KD	IC, VOLTAGE REGURATER
IC8	TA75W01FU	IC, AUDIO AMP ACTIVE FILTER
IC9	TA31136FN	IC, IF SYSTEM
IC10	NJM2100V	IC, AUDIO AMP
IC11	M68732H	IC, RF POWER AMP
IC11	M68732SH	IC, RF POWER AMP
IC11	M68732UH	IC, RF POWER AMP
IC11	M68732L	IC, RF POWER AMP
IC12	TA7368F	IC, AUDIO POWER AMP
IC13	NJM2904V	IC, APC
IC14	TA75W01FU	IC, ACTIVE FILTER
Q1 - Q3	DTC114EE	TRANSISTOR, DC SWITCH
Q4	DTC114YE	TRANSISTOR, CLOCK FREQUENCY SHIFT
Q5	UMG3N	TRANSISTOR, DC SWITCH
Q6	UPA572T	FET, DC SWITCH
Q7	DTA114YE	TRANSISTOR, DC SWITCH
Q8	MP5A02	TRANSISTOR, DC SWITCH
Q9	UMG3N	TRANSISTOR, DC SWITCH
Q12	DTA114YE	TRANSISTOR, DC SWITCH
Q14	2SC5108(Y)	TRANSISTOR, RF AMP
Q15	2SK508NV(K52)	FET, VCO RX
Q16	2SC4617(S)	TRANSISTOR, ACTIVE FILTER
Q17	DTA114EE	TRANSISTOR, AF MUTE SWITCH
Q18	2SC4226(R24)	TRANSISTOR, VCO TX
Q19	2SJ243	FET, DC SWITCH
Q20	2SC4619	TRANSISTOR, IF AMP
Q21	2SC5108(Y)	TRANSISTOR, RF BUFFER AMP
Q22	2SC4617(S)	TRANSISTOR, ACTIVE FILTER
Q23	UMC4	TRANSISTOR, DC SWITCH
Q24	2SC4617(S)	TRANSISTOR, RIPPLE FILTER
Q25	2SC4617(S)	TRANSISTOR, ACTIVE FILTER
Q26	2SC5108(Y)	TRANSISTOR, RF AMP
Q28	2SC4617(S)	TRANSISTOR, ACTIVE FILTER
Q29	SGM2014M	FET, MIXER
Q30	2SC5108(Y)	TRANSISTOR, RF AMP
Q31	2SK1824	FET, AUDIO MUTE SWITCH
Q32	2SC4988	TRANSISTOR, TX DRIVE
Q34	DTC144EE	TRANSISTOR, DC SWITCH
Q35	2SA1362(GR)	TRANSISTOR, DC SWITCH
Q36	DTC144EE	TRANSISTOR, DC SWITCH
Q37	2SK1215(E)	FET, RX RF AMP
Q38	DTC144EE	TRANSISTOR, DC SWITCH
Q39	2SK1824	TRANSISTOR, AUDIO MUTE SWITCH
Q40	DTC114EE	TRANSISTOR, DC SWITCH
Q41	2SK1588	FET, AUDIO MUTE SWITCH
Q42	3SK239A	FET, RX RF AMP
Q43	DTA144EE	TRANSISTOR, DC SWITCH
D1	B30-2143-05	LED, LCD BACK LIGHT
D2	B30-2019-05	LED, TX BUSY LED
D3	MA2S111	DIODE, UNLOCK DETECT

DESCRIPTION OF COMPONENTS

Ref. No.	Parts No.	Description
D4	1SV269	VARIABLE CAPACITANCE DIODE, FREQUENCY CON
D5	1SS373	DIODE, REVERSE-FLOW PREVENTION
D6	UMN1N	DIODE, DC CUT
D7 ~ D10	MA2S376	VARIABLE CAPACITANCE DIODE, FREQUENCY CON
D11	MA360	VARIABLE CAPACITANCE DIODE, TX MODULATION
D12	MA2S111	DIODE, CUEERNT STEERING
D13	DA221	DIODE, LIMITTER
D14, D15	MA2S077	DIODE, RF SWITCH
D17	MA8062	ZENER DIODE, VOLTAGE PROTECTION
D18	DAN222	DIODE, REVERCE PROTECTION
D19	HVU131	DIODE, ANT SWITCH
D20, D21	MA2S077	DIODE, ANT SWITCH
D22	1SR154-400	DIODE, REVERCE PROTECTION

元件的说明

TX-RX单元(X57-4860-XX)

参考编码	部 件 号	动作/条件/互换
IC1	M38267M8L150GP	集成电路, 微处理机
IC2	PST9140NR	集成电路, 复位开关
IC3	LC73881M	集成电路, DTMF 编码器
IC4	AT2408N10S12.5	集成电路, EEPROM
IC5	RN5VL45C	集成电路, 电压检测
IC6	LMX1511TMX	集成电路, 锁相环系统
IC7	S-81350HG-KD	集成电路, 稳压器
IC8	TA75W01FU	集成电路, 音频放大器有源滤波器
IC9	TA31136FN	集成电路, 中频系统
IC10	NJM2100V	集成电路, 音频放大器
IC11	M68732H	集成电路, 射频功率放大器
IC11	M68732SH	集成电路, 射频功率放大器
IC11	M68732UH	集成电路, 射频功率放大器
IC11	M68732L	集成电路, 射频功率放大器
IC12	TA7368F	集成电路, 音频功率放大器
IC13	NJM2904V	集成电路, APC
IC14	TA75W01FU	集成电路, 有源滤波器
Q1~Q3	DTCL14EE	晶体管, 直流开关
Q4	DTCL14YE	晶体管, 时钟频移
Q5	UMG3N	晶体管, 直流开关
Q6	LPA572T	场效应晶体管, 直流开关
Q7	DTA114YE	晶体管, 直流开关
Q8	MP5A02	晶体管, 直流开关
Q9	UMG3N	晶体管, 直流开关
Q12	DTA114YE	晶体管, 直流开关
Q14	2SC5108(Y)	晶体管, 射频放大器
Q15	2SK508NV(K52)	场效应晶体管, VCO接收
Q16	2SC4617(S)	晶体管, 有源滤波器
Q17	DTA114EE	音频静音开关
Q18	2SC4226(R24)	晶体管, VCO发射
Q19	2SJ243	场效应晶体管, 直流开关
Q20	2SC4619	晶体管, 中频放大器
Q21	2SC5108(Y)	晶体管, 射频缓冲放大器
Q22	2SC4617(S)	晶体管, 有源滤波器
Q23	UMC4	晶体管, 直流开关
Q24	2SC4617(S)	晶体管, 波纹滤波器
Q25	2SC4617(S)	晶体管, 有源滤波器
Q26	2SC5108(Y)	晶体管, 射频放大器
Q28	2SC4617(S)	晶体管, 有源滤波器
Q29	SGM2014M	场效应晶体管, 混频器
Q30	2SC5108(Y)	晶体管, 射频放大器
Q31	2SK1824	场效应晶体管, 音频静音开关
Q32	2SC4988	晶体管, 直流激励
Q34	DTC144EE	晶体管, 直流开关
Q35	2SA1362(GR)	晶体管, 直流开关
Q36	DTC144EE	晶体管, 直流开关
Q37	2SK1215(F)	场效应晶体管, 接收射频放大器
Q38	DTC144EE	晶体管, 直流开关
Q39	2SK1824	晶体管, 音频静音开关
Q40	DTC114EE	晶体管, 直流开关
Q41	2SK1688	场效应晶体管, 音频静音开关
Q42	3SK239A	场效应晶体管, 接收射频放大器
Q43	DTA144EE	晶体管, 直流开关
D1	B30-2143-05	LED, LCD背面照明
D2	B30-2019-05	LED, 接收占线LED
D3	MA2SI11	二极管, 解锁检测
D4	1SV269	可变电容二极管, 频率控制
D5	1SS373	逆流防止
D6	UMN1N	二极管, 直流截止

元件的说明

参考编码	部 件 号	动作/条件/互换
D7~D10	MA2S376	可变电容二极管, 频率控制
D11	MA360	可变电容二极管, 接收调制
D12	MA2S111	二极管, 电流导引
D13	DA221	二极管, 限幅器
D14, D15	MA2S077	二极管, 射频开关
D17	MA8062	齐纳二极管, 电压保护
D18	DAN222	二极管, 反向保护
D19	HVU131	二极管, 天线开关
D20, D21	MA2S077	二极管, 天线开关
D22	1SR154-400	二极管, 反向保护

TK-370/378

PARTS LIST/零件目录

* New Parts Δ indicates safety critical components.
Parts without Parts No. are not supplied.
Les articles non mentionnés dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

L: Scandinavia K: USA P: Canada
Y: PX (Far East, Hawaii) T: England E: Europe
Y: AAFES (Europe) X: Australia M: Other Areas

TK-370/378

TX-RX UNIT (X57-4860-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-370/378					
1	1B		A02-1948-23	PLASTIC CABINET (FRONT)	
2	3A		A10-1355-11	CHASSIS (REAR)	
3	2B		A62-0426-02	MAIN PANEL (TOP)	
4	1A		B01-0682-02	PANEL ESCUTCHEON (PTT)	
5	1B		B09-0351-03	CAP (S/M JACKS)	
6	3B		B11-1142-14	REFLECTOR (TX-RX)	K,K2
8	1B		B42-3394-14	FACE PLATE, LABEL (FCC)	K3,K4
8	1B		B42-3394-14	FACE PLATE, LABEL (FCC)	
9	3A		B42-5656-04	FACE PLATE, LABEL (CHASSIS)	
13			B46-0409-40	USER & WARRANTY CARD	K,K2
			B46-0409-40	USER & WARRANTY CARD	K3,K4
14			B62-0628-00	INSTRUCTION MANUAL	
15	3A	*	B72-1016-04	MODEL NAME PLATE	K
15	3A	*	B72-1017-04	MODEL NAME PLATE	K2
15	3A	*	B72-1018-04	MODEL NAME PLATE	K3
15	3A	*	B72-1019-04	MODEL NAME PLATE	K4
15	3A	*	B72-1022-04	MODEL NAME PLATE	M
15	3A	*	B72-1023-04	MODEL NAME PLATE	M4
16	3B		E04-0197-05	RF COAXIAL CONNECTOR ANT TNC	M,M4
16	3B		E04-0199-05	RF COAXIAL CONNECTOR ANT SCREW	K,K2
16	3B		E04-0199-05	RF COAXIAL CONNECTOR ANT SCREW	K3,K4
17	3A		E23-1008-04	TERMINAL (BATT -)	
18	2A		E29-1151-14	CONNECTOR&TERMINAL(SPI)	
19	2B	*	F20-1167-04	INSULATING BOARD	
20	2B	*	F20-1168-04	INSULATING BOARD (LCD)	
21	1A		G01-0881-04	LEAF SPRING, FLAT SPRING	
22	2B		G09-0418-05	SPRING (KNOB)	
23	3B	*	G11-0765-04	SHEET (CHASSIS)	
38	3B	*	G11-0769-04	SHEET (CHASSIS)	
24	2B		G13-1512-04	FORMED PLATE (SPI)	
25	1B	*	G13-1556-04	FORMED PLATE	
26	2B		G63-0790-03	PACKING (TOP)	
27	2B		G53-0791-03	PACKING (SP/MIC)	
28	2B		G53-0792-04	PACKING (BATT HOLDER)	
29	1B		G53-0794-03	PACKING (SPI)	
30			H12-1487-02	PACKING FIXTURE	
31			H25-0085-04	BAG	
32			H25-2012-04	BAG	
33			H52-0732-02	ITEM CARTON CASE	
34	1A		J19-1572-04	HOLDER (RELEASE)	
35	1B		J21-4493-04	HARDWARE FIXTURE (SP/MIC)	
36	3A	*	J21-8307-04	HARDWARE FIXTURE (CHASSIS)	
37	3B	*	J29-0824-03	HOOK	
		*	J30-1217-04	SPACERE (CABINET)	
39	2B		K29-5067-02	KNOB (DTMF)	
40	1A		K29-5068-03	KNOB (RELEASE)	
41	1A		K29-5069-12	KNOB (PTT)	
42	2B		K29-5070-03	KNOB (CH)	
43	2B		K29-5071-13	KNOB (VOL)	
A	2B		N14-0567-04	NUT (ANT-SCREW)	K,K2
A	2B		N14-0567-04	NUT (ANT-SCREW)	K3,K4
A	2B		N14-0568-04	NUT (ANT-TNC)	M,M4
B	2B		N14-0569-04	NUT (VR/CH)	
TX-RX UNIT (X57-4860-XX) -15:K, -16:K2, -17:K3, -18:K4, -20:M, -21:M4					
C	3B		N30-2604-46	SCREW (ANTI)	
D	2A		N32-2005-46	FLAT HEAD MACHIN SCREW	
E	3A		N35-2610-45	BINDING HEAD MACHINE SCREW	
F	3B		N78-2640-46	PAN HEAD TAPTITE SCREW	
G	2A,2B		N89-2005-46	BINDING HEAD TAPTITE SCREW	
H	3B		N99-0396-05	SCREW SET	
44	1B		T07-0326-05	LOUDSPEAKER(FULLRANGE)	
45			T90-0380-05	ANTENNA (450-520MHZ)SCREW	K,K2,K3
45			T90-0448-05	ANTENNA (400-450MHZ)SCREW	K4
45	*		T90-0609-05	ANTENNA (400-450MHZ)TNC	M4
45	*		T90-0609-05	ANTENNA (450-520MHZ)TNC	M
50	2A		B11-1143-03	FILTER (REFLECTOR)	
51	2A		B11-1169-04	FILTER (REFLECTOR)	
52	2A		B38-0755-05	DISPLAY ASSY	
			CK73GB1E183K	CHIP C 0.018UF	K
C1,2			CK73GB1C273K	CHIP C 0.027UF	K
C3			CK73GB1H471K	CHIP C 470PF	K
C4,5			CK73GB1H103K	CHIP C 0.010UF	K
C6			CK73GB1H471K	CHIP C 470PF	K
C7			CK73GB1C104K	CHIP C 0.10UF	K
C8			CC73GCH1H100D	CHIP C 10PF	D
C9			CC73GCH1H221J	CHIP C 220PF	J
C10			CK73GB1H103K	CHIP C 0.010UF	K
C11			CC73GCH1H221J	CHIP C 220PF	J
C12			CK73GB1H471K	CHIP C 470PF	K
C13,14			CC73GCH1H221J	CHIP C 220PF	J
C15			CC73GCH1H030C	CHIP C 3.0PF	C
C16			CC73GCH1H100D	CHIP C 10PF	D
C17			CC73GCH1H221J	CHIP C 220PF	J
C18			CK73GB1C104K	CHIP C 0.10UF	K
C19,20			CK73GB1H471K	CHIP C 470PF	K
C21-23			CC73GCH1H221J	CHIP C 220PF	J
C24			CK73GB1H102K	CHIP C 1000PF	K
C25			CK73GB1H471K	CHIP C 470PF	K
C26			CC73GCH1H221J	CHIP C 220PF	J
C27			CK73GB1H471K	CHIP C 470PF	K
C28			CK73GB1C104K	CHIP C 0.10UF	K
C29			CK73GB1H471K	CHIP C 470PF	K
C30			CC73GCH1H101J	CHIP C 100PF	J
C31			CK73GB1H471K	CHIP C 470PF	K
C32			CC73GCH1H101J	CHIP C 100PF	J
C33			CK73GB1H103K	CHIP C 0.010UF	K
C34			CK73GB1H471K	CHIP C 470PF	K
C35			CK73GB1H471K	CHIP C 470PF	K
C36			CC73GCH1H101J	CHIP C 100PF	J
C37	*		CK73FB0J105K	CHIP C 1.0UF	K
C38			C92-0650-05	CHIP-TAN 10UF	6.3WV
C39			CK73GB1C104K	CHIP C 0.10UF	K
C40			C92-0507-05	CHIP-TAN 4.7UF	6.3WV
C41	*		C92-0650-05	CHIP-TAN 10UF	6.3WV
C42-44			CK73GB1H471K	CHIP C 470PF	K
C45			CC73GCH1H130J	CHIP C 13PF	J

TK-370 : K, K2, K3, K4
TK-378 : M, M4

PARTS LIST/零件目录

TX-RX UNIT (X57-4860-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C46			CC73GCH1H200J	CHIP C 20PF J		C107			CK73FB1H822K	CHIP C 8200PF K	K4,M4
C47,48			CK73GB1H471K	CHIP C 470PF K		C107			CK73FB1H123K	CHIP C 0.012UF K	K
C49			CC73GCH1H101J	CHIP C 100PF J		C108			CC73GCH1H080D	CHIP C 8.0PF D	K,K2,K3,M
C50			C92-0576-05	CHIP-TAN 1.0UF 6.3WV		C108			CC73GCH1H120J	CHIP C 12PF J	K4,M4
C51			CK73GB1H471K	CHIP C 470PF K		C109			CK73GB1H103K	CHIP C 0.010UF K	
C52			CK73FB0J105K	CHIP C 1.0UF K		C110			CC73GCH1H050C	CHIP C 5.0PF C	K,K2,K3,M
C53,54			CK73GB1H102K	CHIP C 1000PF K		C110			CC73GCH1H060D	CHIP C 6.0PF D	K4,M4
C55			CK73EF1C105Z	CHIP C 1.0UF Z		C111			CC73GCH1H100D	CHIP C 10PF D	K,K2,K3,M
C56			C92-0521-05	CHIP-TAN 0.47UF 20WV		C111			CC73GCH1H130J	CHIP C 13PF J	K4,M4
C57			C92-0661-05	CHIP-TAN 2.2UF 10WV		C112,113			CK73GB1H471K	CHIP C 470PF K	
C58			CK73GB1H471K	CHIP C 470PF K		C114			CC73GCH1H270J	CHIP C 27PF J	
C59			C92-0001-05	CHIP C 0.1UF 35WV		C116			CK73GB1C104K	CHIP C 0.10UF K	
C60			CK73GB1H392K	CHIP C 3900PF K		C117			CC73GCH1H060D	CHIP C 6.0PF D	K,K2,K3,M
C61			CK73GB1C333K	CHIP C 0.033UF K		C117,118			CC73GCH1H080D	CHIP C 8.0PF D	K4,M4
C62			C92-0002-05	CHIP-TAN 0.22UF 35WV		C118			CC73GCH1H100D	CHIP C 10PF D	K,K2,K3,M
C63			C92-0650-05	CHIP-TAN 10UF 6.3WV		C119			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C65			C92-0655-05	CHIP-TAN 4.7UF 6.3WV		C120			CC73GCH1H150J	CHIP C 15PF J	
C66			CK73GB1H471K	CHIP C 470PF K		C121			CK73GB1H103K	CHIP C 0.010UF K	
C68			CK73GB1H471K	CHIP C 470PF K		C122			CK73GB1H102K	CHIP C 1000PF K	
C70			CK73GB1H103K	CHIP C 0.010UF K		C123			CK73FB1E104K	CHIP C 0.10UF K	
C71			CC73GCH1H020C	CHIP C 2.0PF C		C124			CK73GB1H332K	CHIP C 3300PF K	K,K2
C71			CC73GCH1H030C	CHIP C 3.0PF C	K4,M4	C124			CK73GB1H332K	CHIP C 3300PF K	K3,K4
C72			C92-0560-05	CHIP-TAN 10UF 6.3WV		C124			CK73GB1H272K	CHIP C 2700PF K	M,M4
C73			CK73GB1H471K	CHIP C 470PF K		C125			CK73GB1H561K	CHIP C 560PF K	K2,K3,K4
C74			CK73GB1H472K	CHIP C 4700PF K		C125			CK73GB1H821K	CHIP C 820PF K	K,M,M4
C75			CC73GCH1H220J	CHIP C 22PF J	K,M,K2,K4	C126			CC73GCH1H010C	CHIP C 1.0PF C	
C75			CC73GCH1H270J	CHIP C 27PF J	K3,M4	C127			CC73GCH1H330J	CHIP C 33PF J	
C76,77			CK73GB1E123K	CHIP C 0.012UF K		C128			CC73GCH1H050C	CHIP C 0.5PF C	
C78			CK73GB1H103K	CHIP C 0.010UF K		C129			CK73GB1C333K	CHIP C 0.033UF K	
C79			CK73GB1C104K	CHIP C 0.10UF K		C130,131			CK73GB1C104K	CHIP C 0.10UF K	
C80			CK73GB1H103K	CHIP C 0.010UF K		C132			CK73GB1C473K	CHIP C 0.047UF K	
C81			CC73GCH1H101J	CHIP C 100PF J		C133			CK73GB1H471K	CHIP C 470PF K	
C82			CK73GB1H102K	CHIP C 1000PF K		C134			CK73GB1C104K	CHIP C 0.10UF K	
C85,86			CC73GCH1H221J	CHIP C 22PF J		C135			CK73GB1C473K	CHIP C 0.047UF K	
C87			C92-0576-05	CHIP-TAN 1.0UF 6.3WV		C137			CK73GB1C333K	CHIP C 0.033UF K	
C88			CK73GB1H471K	CHIP C 470PF K		C138			CC73GCH1H060D	CHIP C 6.0PF D	
C89			CC73GCH1H101J	CHIP C 100PF J		C139			CK73GB1C333K	CHIP C 0.033UF K	
C90			C92-0567-05	CHIP-TAN 4.7UF 6.3WV		C140			CC73GCH1H030C	CHIP C 3.0PF C	
C91			CC73GCH1H060D	CHIP C 6.0PF D	K,K2,K3,M	C141			CK73GB1H471K	CHIP C 470PF K	
C91			CC73GCH1H120J	CHIP C 12PF J	K4,M4	C142			CK73FB1E104K	CHIP C 0.10UF K	
C92			CC73GCH1H221J	CHIP C 220PF J	K4,M4	C143			CK73GB1H332K	CHIP C 3300PF K	K,K2
C92			CC73GCH1H330J	CHIP C 33PF J	K2,K3	C143			CK73GB1H332K	CHIP C 3300PF K	K3,K4
C92			CC73GCH1H220J	CHIP C 22PF J	K,M	C143			CK73GB1H272K	CHIP C 2700PF K	M,M4
C93			CK73GB1C104K	CHIP C 0.10UF K		C144			CC73GCH1H220J	CHIP C 22PF J	
C94			CC73GCH1H820J	CHIP C 82PF J		C145			CK73GB1H681K	CHIP C 680PF K	K
C95			CK73GB1C104K	CHIP C 0.10UF K		C145			CK73GB1H561K	CHIP C 560PF K	K2,K3,K4
C96			CC73GCH1H080D	CHIP C 6.0PF D	K,K2,K3,M	C145			CK73GB1H821K	CHIP C 820PF K	M,M4
C96			CC73GCH1H070D	CHIP C 7.0PF D	K4,M4	C146			C92-0655-05	CHIP-TAN 4.7UF 6.3WV	
C97			CC73GCH1H150J	CHIP C 15PF J	K2,K3	C147			CK73GB1H102K	CHIP C 1000PF K	
C97			CC73GCH1H330J	CHIP C 33PF J	K,M,K4,M4	C148			CC73GCH1H060D	CHIP C 6.0PF D	K,K2,K4,M
C98			CC73GCH1H030C	CHIP C 3.0PF C	K,M,K4,M4	C148			CC73GCH1H080D	CHIP C 8.0PF D	K3,M4
C99			CK73GB1H103K	CHIP C 0.010UF K		C150,151			CK73GB1H471K	CHIP C 470PF K	
C101			CC73GCH1H020C	CHIP C 2.0PF C	K2,K3	C152			CK73GB1C333K	CHIP C 0.033UF K	
C101			CC73GCH1H040C	CHIP C 4.0PF C	K4,M4	C154			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C101			CC73GCH1H050C	CHIP C 5.0PF C	K,M	C155			CK73GB1C473K	CHIP C 0.047UF K	
C104			CC73GCH1H050C	CHIP C 0.5PF C		C156			CK73GB1H471K	CHIP C 470PF K	
C105			CK73FB1E104K	CHIP C 0.10UF K		C157			CK73GB1C333K	CHIP C 0.033UF K	
C107			C92-0587-05	CHIP-TAN 2.2UF 4WV	K2,K3	C158			CK73GB1H471K	CHIP C 470PF K	
C107			CK73FB1H103K	CHIP C 0.01UF K	M	C159			CK73GB1H103K	CHIP C 0.010UF K	

TK-370 : K, K2, K3, K4
TK-378 : M, M4

PARTS LIST/零件目录

TX-RX UNIT (X57-4860-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C160			CK73GB1H471K	CHIP C 470PF K		C212			CC73GCH1H180J	CHIP C 18PF J	K4,M4
C161			CC73GCH1H470J	CHIP C 47PF J		C213			CK73GB1C104K	CHIP C 0.10UF K	
C162			CC73GCH1H150J	CHIP C 15PF J	K,K2,K4,M	C214			CK73GB1H102K	CHIP C 1000PF K	
C162			CC73GCH1H180J	CHIP C 18PF J	K3,M4	C215			CK73GB1C473K	CHIP C 0.047UF K	
C163			CC73GCH1H060D	CHIP C 6.0PF D		C216,217			CK73GB1H471K	CHIP C 470PF K	
C164,165			CK73GB1H103K	CHIP C 0.010UF K		C218			C92-0567-05	CHIP-TAN 68UF 6.3WV	
C166			CK73GB1H471K	CHIP C 470PF K		C219			CC73GCH1H010C	CHIP C 1.0PF C	
C168			CC73GCH1H020C	CHIP C 2.0PF C	K4,M4	C220			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C168			CC73GCH1H030C	CHIP C 3.0PF C	K,M	C221			CK73GB1H471K	CHIP C 470PF K	
C169			CC73GCH1H100D	CHIP C 10PF D		C222			CK73GB1H103K	CHIP C 0.010UF K	
C170			CC73GCH1H040C	CHIP C 4.0PF C	K4,M4	C223			CC73GCH1H020C	CHIP C 2.0PF C	
C170			CC73GCH1H185C	CHIP C 1.5PF C	K,K2,K3,M	C224			CC73GCH1H040C	CHIP C 4.0PF C	K4
C171			CK73GB1C473K	CHIP C 0.047UF K		C224			CC73GCH1H050C	CHIP C 5.0PF C	K,K2,K3
C172			CK73GB1C104K	CHIP C 0.10UF K		C224			CC73GCH1H010C	CHIP C 1.0PF C	M4
C173			CK73GB1H103K	CHIP C 0.010UF K		C224			CC73GCH1H030C	CHIP C 3.0PF C	M
C174,175			CK73GB1H471K	CHIP C 470PF K		C225			CK73GB1H471K	CHIP C 470PF K	
C176			CK73GB1C393K	CHIP C 0.039UF K		C226			CC73GCH1H030C	CHIP C 3.0PF C	K
C177			CK73GB1H471K	CHIP C 470PF K		C226			CC73GCH1H040C	CHIP C 4.0PF C	M4
C178			CK73GB1E223K	CHIP C 0.022UF K		C226			CC73GCH1H060D	CHIP C 6.0PF D	M
C179			CC73GCH1H050C	CHIP C 5.0PF C	K4,M4	C227			CK73GB1H471K	CHIP C 470PF K	
C179			CC73GCH1H070D	CHIP C 7.0PF D	K,K2,K3,M	C228			CC73GCH1H030B	CHIP C 3.0PF B	K2,K3
C180			CK73GB1H103K	CHIP C 0.010UF K		C228			CC73GCH1H030B	CHIP C 3.0PF B	K4,M4
C181			CK73GB1C104K	CHIP C 0.10UF K		C228			CC73GCH1H2R5B	CHIP C 2.5PF B	K,M
C182			CK73GB1E103K	CHIP C 0.010UF K		C229,230			CK73GB1H471K	CHIP C 470PF K	
C183			CK73GB1H471K	CHIP C 470PF K		C231			CC73GCH1H030B	CHIP C 3.0PF B	K4,M4
C184			CC73GCH1H070D	CHIP C 7.0PF D	K2,K3	C231			CC73GCH1H040B	CHIP C 4.0PF B	K2,K3
C184			CC73GCH1H100D	CHIP C 10PF D	K,K4,M,M4	C231,232			CC73GCH1H2R5B	CHIP C 2.5PF B	K,M
C185			CK73GB1H102K	CHIP C 1000PF K		C232			CC73GCH1H2R5B	CHIP C 2.5PF B	K2,K3
C186			CK73GB1H471K	CHIP C 470PF K		C232			CC73GCH1H3R5B	CHIP C 3.5PF B	K4,M4
C188			CC73GCH1H050C	CHIP C 5.0PF C		C233			CK73GB1C104K	CHIP C 0.10UF K	
C189,190			CK73GB1H471K	CHIP C 470PF K		C234			CK73GB1C474K	CHIP C 0.47UF K	
C191			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C235,236			CK73GB1H471K	CHIP C 470PF K	
C192			CC73GCH1H101J	CHIP C 100PF J		C237			CC73GCH1H101J	CHIP C 100PF J	
C193			CK73GB1H102K	CHIP C 1000PF K		C238,239			CK73GB1H471K	CHIP C 470PF K	
C195			CK73FB1C474K	CHIP C 0.47UF K		C240			CC73GCH1H181J	CHIP C 180PF J	
C196			C92-0565-05	CHIP-TAN 6.8UF 10WV		C241			CK73GB1H102K	CHIP C 1000PF K	
C197			CK73GB1H562K	CHIP C 5600PF K	K,K2	C242			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C197			CK73GB1H562K	CHIP C 5600PF K	K3,K4	C243,244			CK73GB1H102K	CHIP C 1000PF K	
C197			CK73GB1H222K	CHIP C 2200PF K	M,M4						
C199			CK73GB1H471K	CHIP C 470PF K		TC1			C05-0380-15	TRIMMER CAPACITOR	
C200			CC73GCH1H050C	CHIP C 5.0PF C	K	IC2,3			C05-0384-05	TRIMMER CAPACITOR	
C200			CC73GCH1H030C	CHIP C 3.0PF C	K2,K3	52	2B		E23-1005-04	TERMINAL (BATT +)	
C200			CC73GCH1H030C	CHIP C 3.0PF C	K4,M	54	2A		E23-1020-04	TERMINAL	
C200			CC73GCH1H040C	CHIP C 4.0PF C	M4	55	2A		E23-1146-04	CONNECTOR&TERMINAL(LCD)	
C201			CC73GCH1H101J	CHIP C 100PF J		J1			E11-0457-05	PHONE JACK	
C202			CK73GB1H103K	CHIP C 0.010UF K		F1			F53-0130-05	FUSE (3.0A/32V)	
C203			CK73GB1E223K	CHIP C 0.022UF K		58			G13-1303-04	FORMED PLATE (CRYSTAL)	
C204			CK73GB1H471K	CHIP C 470PF K		59	2B		J19-1571-04	HOLDER (BATT +)	
C205			CK73FB1C474K	CHIP C 0.47UF K		60	1A		J21-4494-04	HARDWARE FIXTURE(LCD)	
C206			CC73GCH1H101J	CHIP C 100PF J		61	2A		J21-4495-14	HARDWARE FIXTURE	
C207			CK73GB1E223K	CHIP C 0.022UF K		62	1A		J30-1218-04	SPACER (LCD)	
C208			CK73GB1H471K	CHIP C 470PF K		CD1			L79-1072-05	FILTER	
C209			C92-0560-05	CHIP-TAN 10UF 6.3WV		CF1,2			L72-0916-05	CERAMIC FILTER 455KHZ	
C210			CC73GCH1H050C	CHIP C 5.0PF C	K	L1,2			L40-2261-37	SMALL FIXED INDUCTOR 0.220UH	
C210			CC73GCH1H030C	CHIP C 3.0PF C	M	L3			L92-0138-05	CORE	
C210			CC73GCH1H060D	CHIP C 6.0PF D	K4,M4	L5			L92-0138-05	CORE	
C211			CK73GB1H471K	CHIP C 470PF K		L6			L40-1871-36	SMALL FIXED INDUCTOR 18NH	
C212			CC73GCH1H120J	CHIP C 12PF J	K,M	L7			L40-3391-37	SMALL FIXED INDUCTOR 3.300UH	
C212			CC73GCH1H150J	CHIP C 15PF J	K2,K3	L8			L40-1081-36	SMALL FIXED INDUCTOR 100NH	

TK-370: K, K2, K3, K4
TK-378: M, M4

PARTS LIST/零件目录

TX-RX UNIT (X57-4860-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
L9			L92-0138-05	CORE		L45			L40-2271-36	SMALL FIXED INDUCTOR 22NH	K,K2,K3,M
L10			L40-3391-37	SMALL FIXED INDUCTOR 3.300UH		L45		*	L40-3371-36	SMALL FIXED INDUCTOR 33NH	K4,M4
L11		*	L40-1081-36	SMALL FIXED INDUCTOR 100NH		L46			L40-5675-54	SMALL FIXED INDUCTOR 56NH	
L12			L33-0744-05	CHOKE COIL		L47			L40-3371-36	SMALL FIXED INDUCTOR 33NH	K2,K3
L13			L33-0744-05	CHOKE COIL	K,K2,K3,M	L47			L40-3971-36	SMALL FIXED INDUCTOR 39NH	K,M
L13			L33-1267-05	CHOKE COIL	K4,M4	L47		*	L40-5671-36	SMALL FIXED INDUCTOR 56NH	K4,M4
L14		*	L40-1081-36	SMALL FIXED INDUCTOR 100NH		L48			L40-2281-37	SMALL FIXED INDUCTOR 0.220UH	
L15			L40-3391-37	SMALL FIXED INDUCTOR 3.300UH		L49,50			L92-0138-05	CORE	
L16			L40-1091-37	SMALL FIXED INDUCTOR 1.000UH		L51			L40-1071-36	SMALL FIXED INDUCTOR 10NH	K,M
L17			L40-2271-36	SMALL FIXED INDUCTOR 22NH		L51			L40-2771-36	SMALL FIXED INDUCTOR 27NH	K4,M4
L18			L92-0138-05	CORE		L51			L40-8261-36	SMALL FIXED INDUCTOR 8.2NH	K2,K3
L19			L40-1871-36	SMALL FIXED INDUCTOR 18NH	K,M	X1			L77-1630-05	CRYSTAL RESONATOR 8.38868MHz	
L19			L40-3971-36	SMALL FIXED INDUCTOR 39NH	K4,M4	X2		*	L77-1649-05	CRYSTAL RESONATOR 12.8MHz	
L20			L40-5681-37	SMALL FIXED INDUCTOR 0.560UH		X3		*	L77-1661-05	CRYSTAL RESONATOR 44.595MHz	K,K2,K4,M
L21			L40-1881-37	SMALL FIXED INDUCTOR 0.180UH		X3		*	L77-1682-05	CRYSTAL RESONATOR 45.805MHz	K3,M4
L22			L40-1871-36	SMALL FIXED INDUCTOR 18NH		XF1			L71-0409-15	CRYSTAL FILTER 45.050M	K,K2,K4,M
L23		*	L40-4771-36	SMALL FIXED INDUCTOR 47NH		XF1			L71-0444-05	CRYSTAL FILTER 45.35MHz	K3,M4
L24			L40-2281-37	SMALL FIXED INDUCTOR 0.220UH		-		*	N38-2640-46	PAN HEAD MACHINE SCREW	
L25			L40-1571-36	SMALL FIXED INDUCTOR 15NH	K,K2,K3,M	-		*	N78-2640-46	PAN HEAD MACHINE SCREW	
L25			L40-2271-36	SMALL FIXED INDUCTOR 22NH	K4,M4	CP1,2			R90-0724-05	MULTI-COMP 1K X4	
L26			L79-1074-05	FILTER 460MHZ	K,M	CP3			R90-0714-05	MULTI-COMP 10K X4	
L26			L79-1146-05	FILTER 480MHZ	K2	CP4			R90-0718-05	MULTI-COMP 4.7K X4	
L26			L79-1148-05	FILTER 413MHZ	K4,M4	R1,2			RK73GB1J472J	CHIP R 4.7K J 1/16W	
L26			L79-1150-05	FILTER 500MHZ	K3	R3			R92-1252-05	CHIP R 0 OHM	
L27			L40-2771-36	SMALL FIXED INDUCTOR 27NH	K,M	R5,6			RK73GB1J104J	CHIP R 100K J 1/16W	
L27		*	L40-4771-36	SMALL FIXED INDUCTOR 47NH	K4,M4	R7-9			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L28			L40-1571-36	SMALL FIXED INDUCTOR 15NH	K,K2,K3,M	R10			RK73GB1J104J	CHIP R 100K J 1/16W	
L28			L40-1871-36	SMALL FIXED INDUCTOR 18NH	K4,M4	R11			RK73GB1J103J	CHIP R 10K J 1/16W	
L29			L92-0138-05	CORE		R12-15			RK73GB1J472J	CHIP R 4.7K J 1/16W	
L30			L40-1871-36	SMALL FIXED INDUCTOR 18NH	K4,M4	R16,17			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L30			L40-6861-36	SMALL FIXED INDUCTOR 6.8NH	K,M	R18,19			RK73GB1J472J	CHIP R 4.7K J 1/16W	
L31			L40-8261-36	SMALL FIXED INDUCTOR 8.2NH	K2,K3	R20			RK73GB1J222J	CHIP R 2.2K J 1/16W	
L31			L92-0149-05	CORE		R21			RK73GB1J103J	CHIP R 10K J 1/16W	
L32			L40-3371-36	SMALL FIXED INDUCTOR 33NH	K,K2,K3,M	R22			RK73GB1J151J	CHIP R 150 J 1/16W	
L32		*	L40-4771-36	SMALL FIXED INDUCTOR 47NH	K4,M4	R23-25			RK73GB1J473J	CHIP R 47K J 1/16W	
L33			L79-1074-05	FILTER(460MHZ)	K,M	R26,27			RK73GB1J104J	CHIP R 100K J 1/16W	
L33			L79-1146-05	FILTER(480MHZ)	K2	R28			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L33			L79-1148-05	FILTER(413MHZ)	K4,M4	R29			RK73GB1J472J	CHIP R 4.7K J 1/16W	
L33			L79-1150-05	FILTER(500MHZ)	K3	R30			RK73GB1J391J	CHIP R 390 J 1/16W	
L34			L40-1095-34	SMALL FIXED INDUCTOR 1UH		R31,32			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L35			L92-0131-05	CORE		R34,35			RK73GB1J100J	CHIP R 10 J 1/16W	
L36			L33-0762-05	CHOKE COIL	K,K2,K3,M	R36			RK73GB1J183J	CHIP R 18K J 1/16W	
L37			L40-3971-36	SMALL FIXED INDUCTOR 39NH	K4,M4	R37-41			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L37		*	L40-5671-36	SMALL FIXED INDUCTOR 56NH	K4,M4	R42			RK73GB1J334J	CHIP R 330K J 1/16W	
L38			L40-2271-36	SMALL FIXED INDUCTOR 22NH	K4,M4	R43-47			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L38			L40-6861-36	SMALL FIXED INDUCTOR 6.8NH	K,K2,K3,M	R48			RK73GB1J472J	CHIP R 4.7K J 1/16W	
L39			L40-6861-36	SMALL FIXED INDUCTOR 6.8NH	K,M	R49			R92-1252-05	CHIP R 0 OHM	
L39			L40-1071-36	SMALL FIXED INDUCTOR 10NH	K2,K3,M4	R50			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L39			L40-1571-36	SMALL FIXED INDUCTOR 15NH	K4	R51			RK73GB1J104J	CHIP R 100K J 1/16W	
L40			L79-1174-05	FILTER	K4,M4	R52			RK73GB1J124J	CHIP R 120K J 1/16W	
L40			L79-1175-05	FILTER	K,K2,K3,M	R53			RK73GB1J473J	CHIP R 47K J 1/16W	
L41			L33-0760-05	CHOKE COIL	K2,K3	R54			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L41			L33-0761-05	CHOKE COIL	K,M	R55			RK73GB1J272J	CHIP R 2.7K J 1/16W	
L41			L33-0762-05	CHOKE COIL	K4,M4	R56			RK73GB1J100J	CHIP R 10 J 1/16W	
L42			L92-0149-05	CORE		R57			RK73GB1J104J	CHIP R 100K J 1/16W	
L43			L40-1092-81	SMALL FIXED INDUCTOR		R58			RK73GB1J562J	CHIP R 5.6K J 1/16W	
L44			L40-3971-36	SMALL FIXED INDUCTOR 39NH	K2,K3	R59			RK73GB1J332J	CHIP R 3.3K J 1/16W	
L44		*	L40-4771-36	SMALL FIXED INDUCTOR 47NH	K,M						
L44			L40-6871-36	SMALL FIXED INDUCTOR 68NH	K4,M4						

TK-370 : K, K2, K3, K4

TK-378 : M, M4

TX-RX UNIT (X57-4860-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R60			RK73GB1J224J	CHIP R 220K J 1/16W		R130			RK73GB1J101J	CHIP R 100 J 1/16W	K2,K3 K,M,K4,M4
R61			RK73GB1J103J	CHIP R 10K J 1/16W		R131			RK73GB1J151J	CHIP R 150 J 1/16W	
R62			RK73GB1J332J	CHIP R 3.3K J 1/16W		R131			RK73GB1J101J	CHIP R 100 J 1/16W	
R63,64			RK73GB1J103J	CHIP R 10K J 1/16W		R132			RK73GB1J823J	CHIP R 82K J 1/16W	
R65,66			RK73GB1J102J	CHIP R 1.0K J 1/16W		R133			RK73GB1J185J	CHIP R 1.8M J 1/16W	
R67			RK73GB1J103J	CHIP R 10K J 1/16W		R134			RK73GB1J182J	CHIP R 1.8K J 1/16W	K,K2,K4,M K3,M4
R68			RK73GB1J272J	CHIP R 2.7K J 1/16W		R135			RK73GB1J333J	CHIP R 33K J 1/16W	
R69			RK73GB1J102J	CHIP R 1.0K J 1/16W		R136			RK73GB1J103J	CHIP R 10K J 1/16W	
R70			RK73GB1J473J	CHIP R 47K J 1/16W		R136			RK73GB1J273J	CHIP R 27K J 1/16W	
R72			RK73GB1J104J	CHIP R 100K J 1/16W		R137			RK73GB1J271J	CHIP R 270 J 1/16W	
R73			RK73GB1J103J	CHIP R 10K J 1/16W		R138			RK73GB1J104J	CHIP R 100K J 1/16W	K3,M4 K,K2,K4,M
R74			RK73GB1J474J	CHIP R 470K J 1/16W		R139			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R75			RK73GB1J333J	CHIP R 33K J 1/16W		R140			RK73GB1J333J	CHIP R 33K J 1/16W	
R76			RK73GB1J471J	CHIP R 470 J 1/16W		R141			RK73GB1J220J	CHIP R 22 J 1/16W	
R78			RK73GB1J154J	CHIP R 150K J 1/16W		R142			RK73GB1J124J	CHIP R 120K J 1/16W	
R79			RK73GB1J152J	CHIP R 1.5K J 1/16W		R143,144			RK73GB1J104J	CHIP R 100K J 1/16W	K3,M4 K,K2,K4,M
R80			RK73GB1J681J	CHIP R 680 J 1/16W		R145			RK73GB1J684J	CHIP R 680K J 1/16W	
R81			RK73GB1J124J	CHIP R 120K J 1/16W		R146			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R83,84			RN73GH1J333D	METAL FILM R 33K D 1/16W		R147			RK73GB1J103J	CHIP R 10K J 1/16W	
R85			RN73GH1J243D	METAL FILM R 24K D 1/16W		R148			RK73GB1J101J	CHIP R 100 J 1/16W	
R86			RN73GH1J393D	METAL FILM R 39K D 1/16W		R149			RK73GB1J471J	CHIP R 470 J 1/16W	K3,M4 K,K2,K4,M
R87			RK73GB1J103J	CHIP R 10K J 1/16W		R149			RK73GB1J561J	CHIP R 560 J 1/16W	
R88			RN73GH1J103D	METAL FILM R 10K D 1/16W		R150			RK73GB1J104J	CHIP R 100K J 1/16W	
R90			RK73GB1J102J	CHIP R 1.0K J 1/16W		R151			RK73GB1J185J	CHIP R 1.8M J 1/16W	
R91			RK73GB1J101J	CHIP R 100 J 1/16W		R153			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R92,93			RK73GB1J473J	CHIP R 47K J 1/16W		R154			RK73GB1J392J	CHIP R 3.9K J 1/16W	K2,K3,K4 K
R94			RK73GB1J103J	CHIP R 10K J 1/16W		R155			RK73GB1J333J	CHIP R 33K J 1/16W	
R95			RK73GB1J471J	CHIP R 470 J 1/16W		R156,157			RK73GB1J154J	CHIP R 156K J 1/16W	
R96			R92-0670-05	CHIP R 0 OHM		R158			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R97			RK73GB1J104J	CHIP R 100K J 1/16W		R159			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R98			RK73GB1J102J	CHIP R 1.0K J 1/16W		R160			RK73GB1J104J	CHIP R 100K J 1/16W	K2,K3,K4 K
R99,100			RK73GB1J332J	CHIP R 3.3K J 1/16W		R162			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R101,102			RK73GB1J103J	CHIP R 10K J 1/16W		R163			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R103			RK73GB1J473J	CHIP R 47K J 1/16W		R164			RK73GB1J333J	CHIP R 33K J 1/16W	
R104			RK73GB1J682J	CHIP R 6.8K J 1/16W		R166			RK73GB1J184J	CHIP R 180K J 1/16W	
R105			RK73GB1J104J	CHIP R 100K J 1/16W	K,K2,K4,M K3,M4	R167			RK73GB1J561J	CHIP R 560 J 1/16W	K2,K3,K4 K
R106			RK73GB1J102J	CHIP R 1.0K J 1/16W		R168			R92-1252-05	CHIP R 0 OHM	
R107			RK73GB1J152J	CHIP R 1.5K J 1/16W		R169			RK73GB1J104J	CHIP R 100K J 1/16W	
R108			RK73GB1J154J	CHIP R 150K J 1/16W		R170			RK73GB1J101J	CHIP R 100 J 1/16W	
R109			RK73GB1J562J	CHIP R 5.6K J 1/16W		R171			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R110			RK73GB1J333J	CHIP R 33K J 1/16W		R172			RK73GB1J562J	CHIP R 5.6K J 1/16W	K2,K3,K4 K
R111			RK73GB1J103J	CHIP R 10K J 1/16W		R173			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R112			RK73GB1J684J	CHIP R 680K J 1/16W		R175,176			RK73GB1J154J	CHIP R 150K J 1/16W	
R113			RK73GB1J333J	CHIP R 33K J 1/16W		R177			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R114			RK73GB1J274J	CHIP R 270K J 1/16W		R177			RK73GB1J682J	CHIP R 6.8K J 1/16W	
R115			RK73GB1J152J	CHIP R 1.5K J 1/16W		R177			RK73GB1J472J	CHIP R 4.7K J 1/16W	M M4
R116			RK73GB1J683J	CHIP R 68K J 1/16W		R177			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R117			RK73GB1J473J	CHIP R 47K J 1/16W		R178			RK73GB1J100J	CHIP R 10 J 1/16W	
R118			RK73GB1J153J	CHIP R 15K J 1/16W		R179			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R119			RK73GB1J102J	CHIP R 1.0K J 1/16W		R180			RK73GB1J473J	CHIP R 47K J 1/16W	
R120			RK73GB1J684J	CHIP R 680K J 1/16W		R181			RK73GB1J122J	CHIP R 1.2K J 1/16W	K,K2,K3,M K4,M4
R121			RK73GB1J104J	CHIP R 100K J 1/16W		R183			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R122			RK73GB1J183J	CHIP R 18K J 1/16W		R184			RK73GB1J564J	CHIP R 560K J 1/16W	
R123			RK73GB1J103J	CHIP R 10K J 1/16W		R186			RK73GB1J682J	CHIP R 6.8K J 1/16W	
R124			RK73GB1J332J	CHIP R 3.3K J 1/16W		R186			RK73GB1J103J	CHIP R 10K J 1/16W	
R125			RK73GB1J473J	CHIP R 47K J 1/16W		R189			RK73GB1J331J	CHIP R 330 J 1/16W	K,K2,K3,M K4,M4
R127			RK73GB1J103J	CHIP R 10K J 1/16W		R190			RK73GB1J470J	CHIP R 47 J 1/16W	
R128			RK73GB1J682J	CHIP R 6.8K J 1/16W		R190			RK73GB1J680J	CHIP R 68 J 1/16W	
R129			RK73GB1J682J	CHIP R 6.2K J 1/16W		R191			RK73GB1J152J	CHIP R 1.5K J 1/16W	

TK-370 : K, K2, K3, K4

TK-378 : M, M4

PARTS LIST/零件目录

TX-RX UNIT (X57-4860-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R192			RK73GB1J102J	CHIP R 1.0K J 1/16W		R251			R92-1252-05	CHIP R 0 OHM	
R193			RK73GB1J473J	CHIP R 47K J 1/16W		R252			RK73GB1J104J	CHIP R 100K J 1/16W	
R194			RK73GB1J332J	CHIP R 3.3K J 1/16W		R253			RK73GB1J223J	CHIP R 22K J 1/16W	
R195			RK73GB1J103J	CHIP R 10K J 1/16W		R254			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R196			RK73GB1J220J	CHIP R 22 J 1/16W		R255,256			RK73GB1J101J	CHIP R 100 J 1/16W	
R197			RK73GB1J561J	CHIP R 560 J 1/16W		R257			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R198			RK73GB1J103J	CHIP R 10K J 1/16W		R258			RK73GB1J333J	CHIP R 33K J 1/16W	
R200			RK73GB1J220J	CHIP R 22 J 1/16W	K,K2,K3,M	R259			RK73GB1J563J	CHIP R 56K J 1/16W	
R200			RK73GB1J270J	CHIP R 27 J 1/16W	K4,M4	R260,261			RN73GH1J154D	METAL FILM R 150K D 1/16W	
R201			RK73GB1J152J	CHIP R 1.5K J 1/16W		R262			RK73GB1J223J	CHIP R 22K J 1/16W	
R202			RK73GB1J101J	CHIP R 100 J 1/16W		VR1			R12-7491-05	TRIMMING POT. 68K	
R203			R92-1252-05	CHIP R 0 OHM		VR2			R32-0647-05	SEMI FIXED VARIABLE RESISTOR	
R204			RK73GB1J104J	CHIP R 100K J 1/16W		VR3			R12-7488-05	TRIMMING POT. 22K	
R205			RK73GB1J331J	CHIP R 330 J 1/16W		VR4			R31-0613-05	VARIABLE RESISTOR	
R206			RK73GB1J103J	CHIP R 10K J 1/16W		S1			S70-0414-05	TACT SWITCH	
R207			RK73GB1J101J	CHIP R 100 J 1/16W		S3,4			S70-0414-06	TACT SWITCH	
R209			RK73GB1J102J	CHIP R 1.0K J 1/16W		-			T91-0544-05	MICROPHONE	
R210			RK73GB1J473J	CHIP R 47K J 1/16W		D1			B30-2143-05	LAMP,LED YG	
R211			RK73GB1J222J	CHIP R 2.2K J 1/16W		D2			B30-2019-05	LAMP,LED RE/GR	
R214			R92-1252-05	CHIP R 0 OHM		D3			MA2S111	DIODE	
R216			RK73GB1J473J	CHIP R 47K J 1/16W	M,M4	D4			1SV269	DIODE	
R217			R92-1252-05	CHIP R 0 OHM		D5			1SS373	DIODE	
R218			RK73EB2ER39K	CHIP R 0.39 K 1/4W		D6			UMN1N	DIODE	
R219			RK73GB1J104J	CHIP R 100K J 1/16W		D7-10			MA2S376	DIODE	
R220			RK73EB2ER39K	CHIP R 0.39 K 1/4W		D11			MA360	DIODE	
R221			RK73GB1J182J	CHIP R 1.8K J 1/16W	K,M	D12			MA2S111	DIODE	
R221			RK73GB1J471J	CHIP R 470 J 1/16W	K4,M4	D13			DA221	DIODE	
R222			RK73GB1J561J	CHIP R 560 J 1/16W	K,K4,M,M4	D14,15			MA2S077	DIODE	
R222			RK73GB1J821J	CHIP R 820 J 1/16W	K2,K3	D17			MA8062	DIODE	
R223			RK73EB2ER39K	CHIP R 0.39 K 1/4W		D18			DAN222	DIODE	
R224			RK73GB1J472J	CHIP R 4.7K J 1/16W	M,M4	D19			HVU131	DIODE	
R225,226			RN73GH1J154D	METAL FILM R 150K D 1/16W		D20,21			MA2S077	DIODE	
R227,228			RK73GB1J153J	CHIP R 15K J 1/16W		D22			1SR154-400	DIODE	
R229			RN73GH1J154D	METAL FILM R 150K D 1/16W		IC1			M38267M8L1506P	IC (MICRO PROCESSOR)	
R230			RK73GB1J124J	CHIP R 120K J 1/16W	K,K2	IC2			PST9140NR	IC (RESET SWITCH)	
R230			RK73GB1J124J	CHIP R 120K J 1/16W	K3,K4	IC3			LC73861M	IC (DTMF DECODER)	
R231			RK73GB1J271J	CHIP R 270 J 1/16W	M,M4	IC4			AT2408N10S12.5	IC (8kb/s SERIAL EEPROM)	
R232			RN73GH1J154D	METAL FILM R 150K D 1/16W		IC5			RN5VL45C	IC (VOLTAGE DETECT)	
R233			RK73GB1J271J	CHIP R 270 J 1/16W		IC6			LMX1511TMX	IC (PLL FREQUENCY SYNTHESIZER)	
R234			RK73GB1J151J	CHIP R 150 J 1/16W		IC7			S-81350HG-KD	IC (VOLTAGE REGULATOR)	
R235			RK73GB1J102J	CHIP R 1K J 1/16W		IC8			TA75W01FU	IC (OP AMP X2)	
R236			RK73GB1J103J	CHIP R 10K J 1/16W	M,M4	IC9			TA31136FN	IC (FM IF DETECTOR)	
R236			RK73GB1J153J	CHIP R 15K J 1/16W	K,K2	IC10			NJM2100V	IC (AUDIO AMP)	
R236			RK73GB1J153J	CHIP R 15K J 1/16W	K3,K4	IC11			M68732H	IC (RF POWER AMP)	K,M
R237			RK73GB1J101J	CHIP R 100 J 1/16W		IC11			M68732L	IC (RF POWER AMP)	K4,M4
R238,239			RK73GB1J100J	CHIP R 10 J 1/16W		IC11			M68732SH	IC (RF POWER AMP)	K2
R240			RK73GB1J102J	CHIP R 1.0K J 1/16W	K2,K3	IC11			M68732UH	IC (RF POWER AMP)	K3
R240			RK73GB1J332J	CHIP R 3.3K J 1/16W	K,K4,M,M4	IC12			TA7368F	IC (AF POWER AMP)	
R241			RK73GB1J103J	CHIP R 10K J 1/16W		IC13			NJM2904V	IC (APC)	
R242			RK73GB1J474J	CHIP R 470K J 1/16W		IC14			TA75W01FU	IC (OP AMP X2)	
R243			RK73GB1J182J	CHIP R 1.8K J 1/16W		Q1-3			DTC114EE	DIGITAL TRANSISTOR	
R244			RK73GB1J273J	CHIP R 27K J 1/16W		Q4			DTC114YE	DIGITAL TRANSISTOR	
R245			RK73GB1J223J	CHIP R 22K J 1/16W		Q5			UMG3N	TRANSISTOR	
R246			RK73GB1J471J	CHIP R 470 J 1/16W		Q6			UPA572T	FET	
R247			RK73GB1J105J	CHIP R 1.0M J 1/16W		Q7			DTA114YE	DIGITAL TRANSISTOR	
R248			RK73GB1J331J	CHIP R 330 J 1/16W		Q8			MP5402	TRANSISTOR	
R249			R92-1252-05	CHIP R 0 OHM		Q9			UMG3N	TRANSISTOR	
R250			RK73GB1J222J	CHIP R 2.2K J 1/16W		Q12			DTA114YE	DIGITAL TRANSISTOR	

TK-370 : K, K2, K3, K4
TK-378 : M, M4


TK-370/378

PARTS LIST/零件目录


TX-RX UNIT (X57-4860-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
Q14			2SC5108(Y)	TRANSISTOR	
Q15			2SK508NVK521	FET	
Q16			2SC4617(S)	TRANSISTOR	
Q17			DTA114EE	DIGITAL TRANSISTOR	
Q18			2SC4226(R24)	TRANSISTOR	
Q19			2SJ243	FET	
Q20			2SC4619	TRANSISTOR	
Q21			2SC5108(Y)	TRANSISTOR	
Q22			2SC4617(S)	TRANSISTOR	
Q23			UMC4	TRANSISTOR	
Q24,25			2SC4617(S)	TRANSISTOR	
Q26			2SC5108(Y)	TRANSISTOR	
Q28			2SC4617(S)	TRANSISTOR	
Q29			SGM2014M	FET	
Q30			2SC5108(Y)	TRANSISTOR	
Q31			2SK1824	FET	
Q32			2SC4988	TRANSISTOR	
Q34			DTC144EE	DIGITAL TRANSISTOR	
Q35			2SA1362(GR)	TRANSISTOR	
Q36			DTC144EE	DIGITAL TRANSISTOR	
Q37			2SK1215(E)	FET	
Q38			DTC144EE	DIGITAL TRANSISTOR	
Q39			2SK1824	FET	
Q40			DTC114EE	DIGITAL TRANSISTOR	
Q41			2SK1588	FET	
Q42		*	3SK239A	FET	
Q43			DTA144EE	DIGITAL TRANSISTOR	
S2			W02-1814-05	FRONT END UNIT,ELECTRIC UNIT	
TH1-3			157-302-65801	THERMISTOR	
TH4			157-503-65001	THERMISTOR	
TH5,6			157-302-65801	THERMISTOR	

EXPLODED VIEW/外观

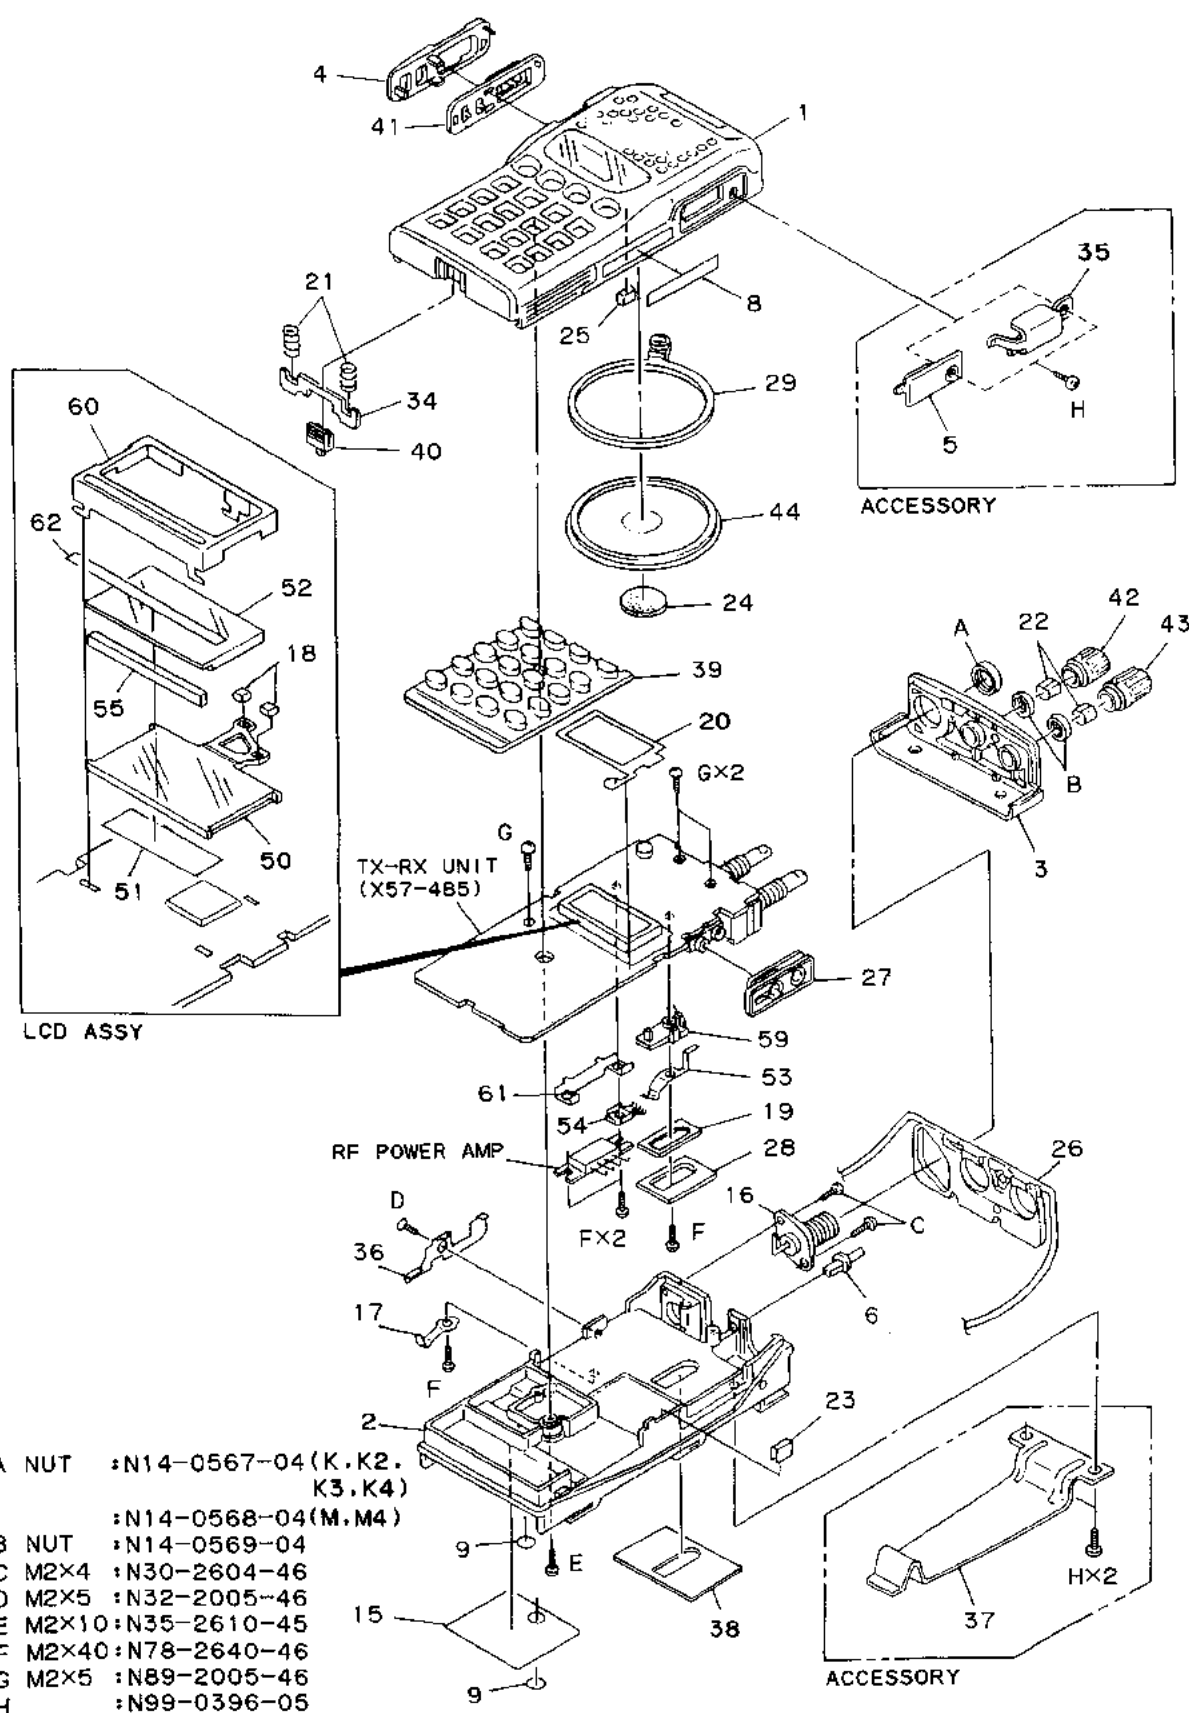

PACKING / 包装

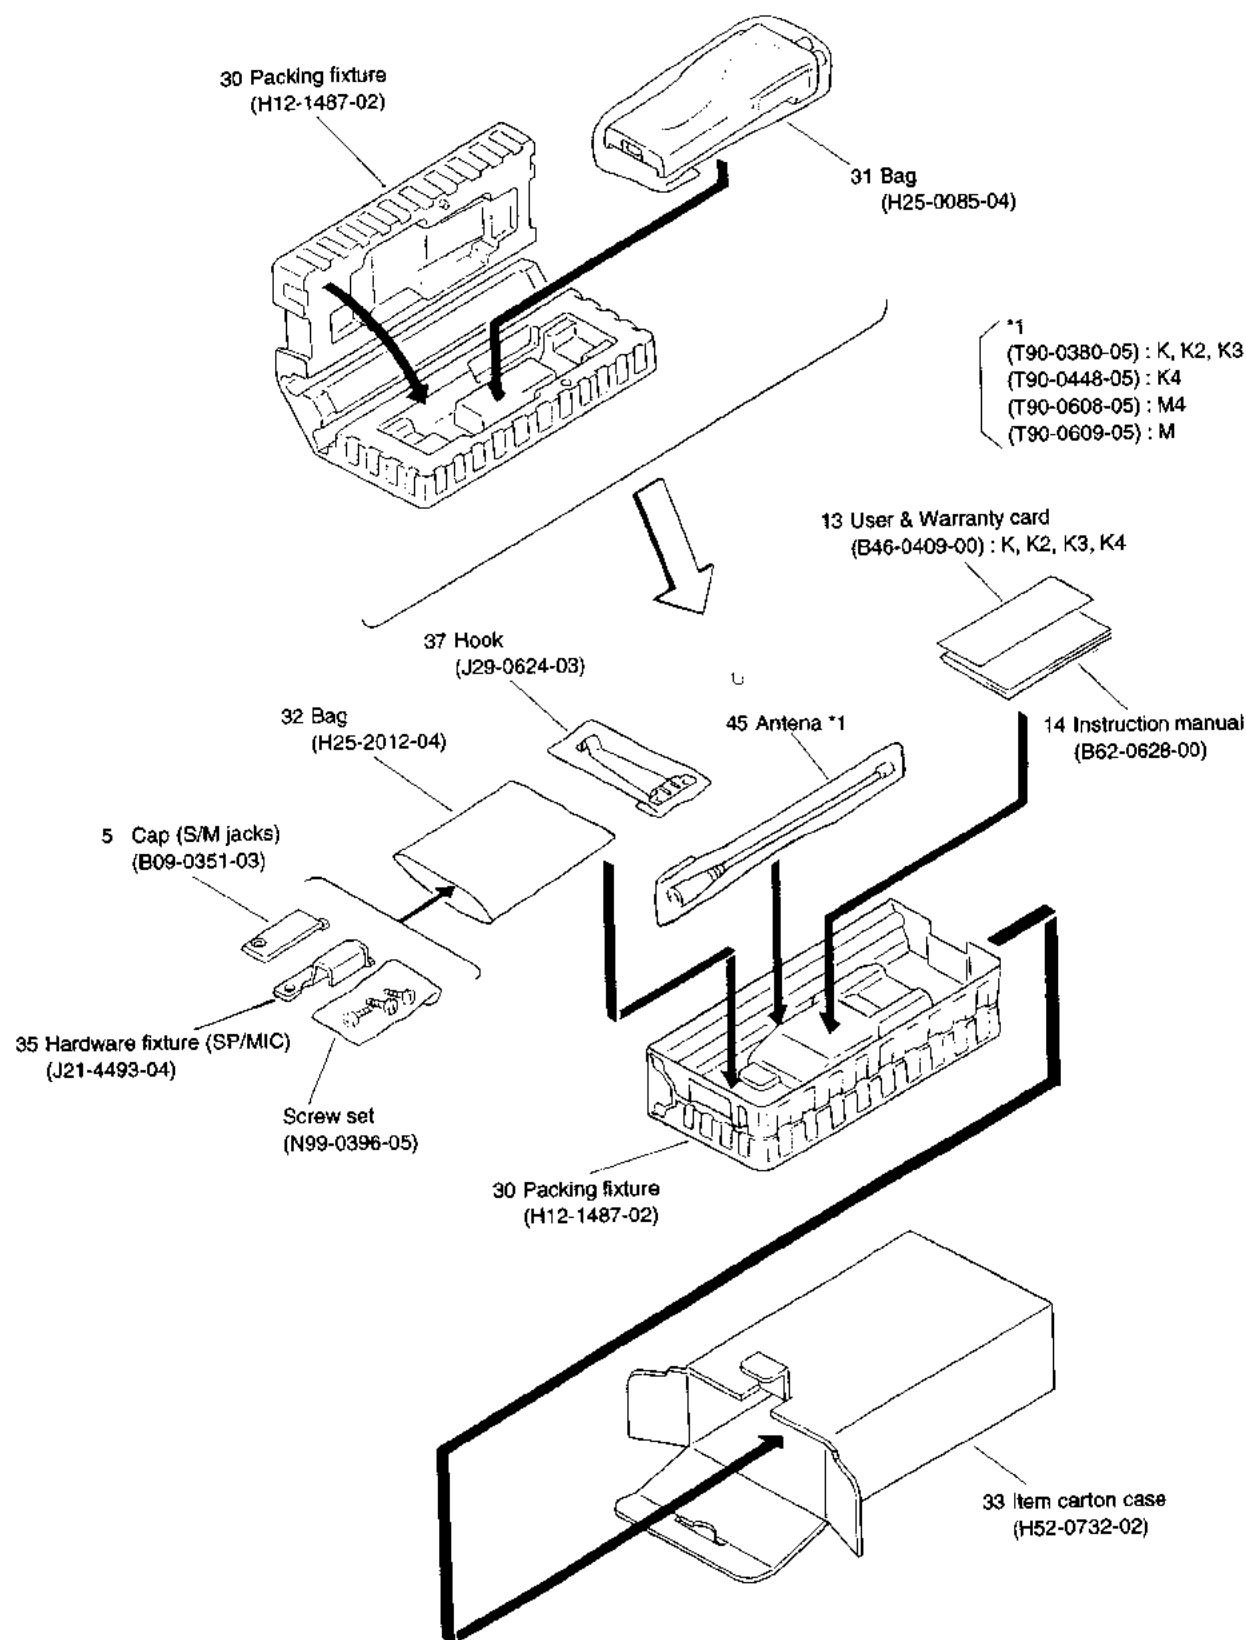

ADJUSTMENT

Required Test Equipment

1. Stabilized Power supply

1. The supply voltage can be changed between 5V and 18V, and the current is 3A or more.
2. The standard voltage is 13.8V.

2. DC Ammeter

1. Class 1 ammeter (17 ranges and other features).
2. The full scale can be set to either 300mA or 3A.
3. A cable of less internal loss must be used.

3. Frequency Counter (f. counter)

1. Frequencies of up to 1GHz or so can be measured.
2. The sensitivity can be changed to 500MHz or below, and measurements are highly stable and accurate (0.2ppm or so).

4. Power Meter

1. Measurable frequency : Up to 500MHz
2. Impedance : 50Ω, unbalanced
3. Measuring range : Full scale of 10W or so
4. A standard cable (5D2W 1m) must be used.

5. RF VTVM (RF V.M)

1. Measurable frequency : Up to 500MHz or so

6. Linear Detector

1. Measurable frequency : Up to 500MHz
2. Characteristics are flat, and CN is 60dB or more.

7. Digital Voltmeter

1. Voltage range : FS = 18V or so
2. Input resistance : 1MΩ or more

8. Oscilloscope

1. Measuring range : DC to 30MHz
2. Provides highly accurate measurements for 5 to 25MHz.

9. AF Voltmeter (AF VTVM)

1. Measurable frequency : 50Hz to 1MHz
2. Maximum sensitivity : 1mV or more

10. Spectrum Analyzer

1. Measuring range : DC to 1GHz or more

11. Standard Signal Generator (SSG)

1. Maximum frequency : 500MHz or more
2. Output : -20dB/0.1μV to 120dB/1V
3. Output impedance : 50Ω

12. Tracking Generator


1. Center frequency : 50kHz to 500MHz
2. Frequency deviation : ±35MHz
3. Output voltage : 100mV or more

13. Dummy Load

1. 8Ω, 3W or more

- Use a non-conductive rod such as a Bakelite rod for adjustment (especially of trimmers and coils).
- To protect the SSG, do not send out signals while adjusting the receiving unit.
- The indicated SSG output levels are for maximum output.

	Destination	Frequency range	Remark
TK-370	K	450 ~ 470 MHz	IF 1 45.05 MHz LOC 44.595 MHz
	K2	470 ~ 490 MHz	IF 1 45.05 MHz LOC 44.595 MHz
	K3	490 ~ 512 MHz	IF 1 46.35 MHz LOC 46.805 MHz
	K4	406 ~ 430 MHz	IF 1 45.05 MHz LOC 44.595 MHz
TK-378	M	450 ~ 470 MHz	IF 1 45.05 MHz LOC 44.595 MHz
	M4	400 ~ 420 MHz	IF 1 46.35 MHz LOC 46.805 MHz

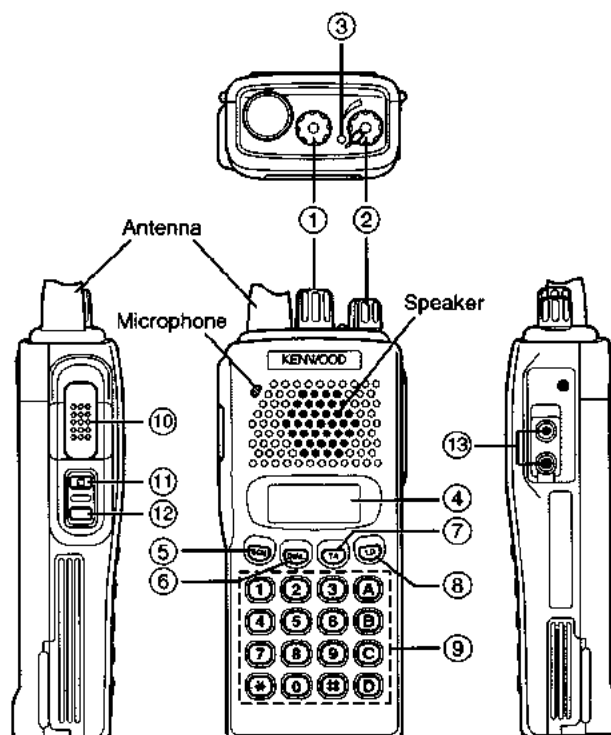

- | | |
|--------------------|-----------------|
| ① CHANNEL selector | ⑧ LO key |
| ② POWER/VOL | ⑨ DTMF keypad |
| ③ LED | ⑩ PTT |
| ④ Display | ⑪ LAMP |
| ⑤ SCN key | ⑫ MONI |
| ⑥ DIAL key | ⑬ Speaker / MIC |
| ⑦ TA key | |

所需测试仪器

1. 稳压电源

1. 输出电压可在5V与8V之间调整, 并且电流是3A或更大。
2. 标准电压是13.8V。

2. 直流电流表

1. 1级电流表(17量程和其他特性)。
2. 满刻度能被设定到300mA和3A。
3. 必须使用低损耗电缆。

3. 频率计

1. 可测量最高达到1GHz左右的频率。
2. 灵敏度能被改变到500MHz或更低, 并且具有高稳定性和精确度(0.2ppm左右)。

4. 功率表

1. 频率范围: 最高达到500MHz。
2. 阻抗: 50Ω, 非平衡式。
3. 量程: 10W左右的满刻度。
4. 必须使用标准导线(5D2W 1m)。

5. 射频电子管电压表(射频电压表)

1. 频率范围: 最高达到500MHz左右。

6. 线性检波器

1. 频率范围: 最高达到500MHz。
2. 特性是平坦的, 且CN是60dB或更大。

7. 数字式电压表

1. 电压量程: FS=18V左右。
2. 输入电阻: 1MΩ或更大。

示波器

1. 量程: DC到30MHz。
2. 为5至25MHz提供高度地精确的测量。

9. 音频电压表(音频电子管电压表)

1. 频率范围: 50Hz至1MHz。
2. 最大灵敏度: 1mV或更高。

10. 频谱分析仪

1. 量程: DC至1GHz或更高。

11. 标准信号发生器(SSG)

1. 最大频率: 500MHz或更大。
2. 输出: -20dB/0.1μV至120dB/1V。
3. 输出阻抗: 50Ω。


12. 跟踪发送器

1. 中心频率: 50kHz至500MHz。
2. 频率漂移: ±35MHz。
3. 输出电压: 100mV或更大。

13. 假负载



1. 8Ω, 3W或更大。
- 利用如胶木杆之类的绝缘杆来调节(特别是对端子和线圈)。
- 为了保护标准信号发生器, 在调节接收单元的同时, 不可发出信号。
- 被表示的标准信号发生器的输出水平是为最大输出。

	Destination	Frequency range	Remark
TK-370	K	450 ~ 470 MHz	IF 1 45.05 MHz LOC 44.595 MHz
	K2	470 ~ 490 MHz	IF 1 45.05 MHz LOC 44.595 MHz
	K3	490 ~ 512 MHz	IF 1 46.35 MHz LOC 46.805 MHz
	K4	406 ~ 430 MHz	IF 1 45.05 MHz LOC 44.595 MHz
TK-378	M	450 ~ 470 MHz	IF 1 45.05 MHz LOC 44.595 MHz
	M4	400 ~ 420 MHz	IF 1 46.35 MHz LOC 46.805 MHz

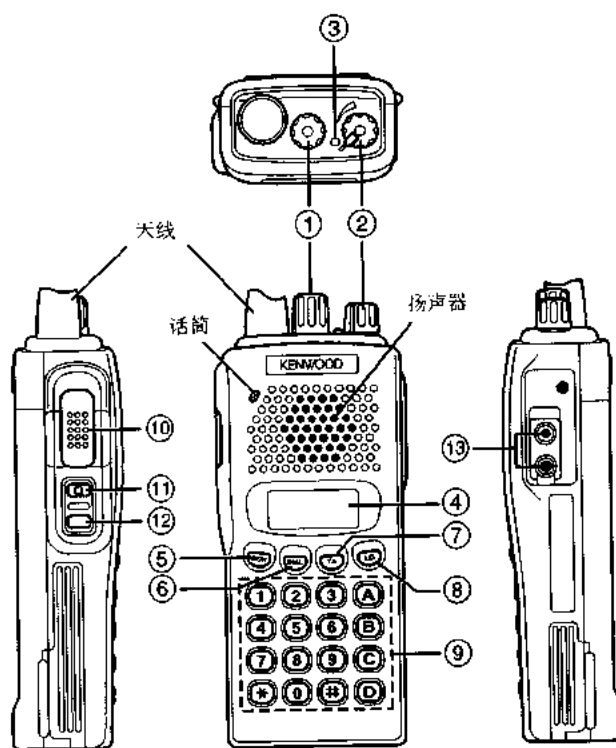

- ① 信道选择旋钮(CHANNEL)
- ② 电源/音量调节旋钮(POWER/VOL)
- ③ 状态指示灯(LED)
- ④ 显示屏
- ⑤ 扫描键(SCN)
- ⑥ 拨号键(DIAL)
- ⑦ 脱网通信键(TA)
- ⑧ 低功率键(LO)
- ⑨ 双音多频键盘(DTMF)
- ⑩ 按-讲键(PTT)
- ⑪ 照明键(LAMP)
- ⑫ 监听键(MONI)
- ⑬ 扬声器-话筒插孔

ADJUSTMENT / 调整

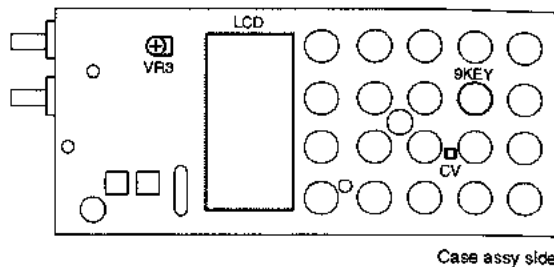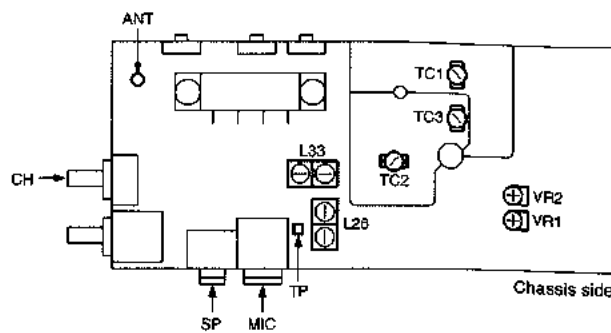

TC1: Frequency adjustment
 TC2: Transmit lock voltage adjustment
 TC3: Receive lock voltage adjustment
 VR1: DQT waveform adjustment
 VR2: DEV adjustment
 L26: } Band-pass filter waveform adjustment
 L33: }
 ANT: Antenna connector
 SP : Speaker jack
 MIC: Microphone jack
 TP : Band-pass filter test point
 CH : Channel selector

VR3: DTMF DEV adjustment
 9 key: DTMF 9 key terminal
 CV : Lock voltage adjustment terminal

TC1 : 频率调整
 TC2 : 发射锁定电压调整
 TC3 : 接收锁定电压调整
 VR1 : DQT波形调整
 VR2 : DEV调整
 L26 } B. P. F. 波形调整
 L33 }
 TP : B. P. F. 测试点
 ANT: 天线端子
 SP : 扬声器插孔
 MIC : 话筒器插孔
 CH : 信道选择开关

VR3 : DTMF DEV调整
 9键 : DTMF 9 键端子
 CV : 锁定电压调整端子


ADJUSTMENT FREQUENCY LIST 调整频率一览表

CH	K, M		K2		K3		K4		M4	
	TX f(MHz)	RX f(MHz)	TX f(MHz)	RX f(MHz)	TX f(MHz)	RX f(MHz)	TX f(MHz)	RX f(MHz)	TX f(MHz)	RX f(MHz)
Center	460.000	460.100	480.000	480.100	501.000	501.100	418.000	418.100	410.000	410.100
LO	450.000	450.100	470.000	470.100	490.000	490.100	406.000	406.100	400.000	400.100
Hi	469.975	469.900	489.975	489.900	511.975	511.900	429.975	429.900	419.975	419.900

ADJUSTMENT/调整


Alignment Mode (Alignment procedure used during servicing)**Operation**

1. Set in Test Mode after first turning Power ON by simultaneously pressing the [LAMP] and [TA] startup keys (takes about 2 seconds).
2. Press [TA] while in Test Mode to set Tune Display Mode. After selecting the frequency, press [LO] while holding down [LAMP].

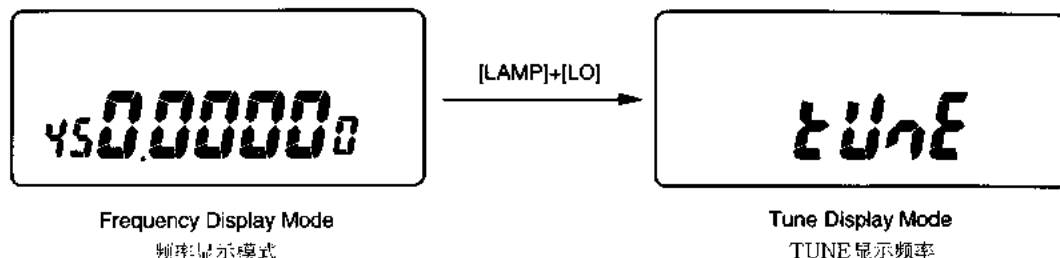**1 Adjusting Transmit Power**

Use this procedure to adjust the transmit Hi Power or Low Power level.

1. Connect the power meter to the transceiver.
2. Set the frequency and then set the "TUNE" display.
3. Transmission is performed automatically at Hi Power when the [PTT] key is pressed. The display "H XXX" now appears. (XXX = 0 to 254)
4. Adjust the [CHANNEL selector] while observing the power meter in order to obtain the transmit power needed. Turn the control clockwise for an increase in power, and turn counterclockwise for a decrease in power.
5. Pressing any key other than [PTT] stores the alignment value into the memory and returns to the "TUNE" display. Pressing the [PTT] key stores the alignment value into the memory and switches to Low Power for transmit. The display "L XXX" appears at this time. (XXX = 0 to 254)
6. Adjust the [CHANNEL selector] while observing the power meter in order to obtain the transmit power needed. Turn the control clockwise for an increase in power, and turn counterclockwise for a decrease in power.
7. Pressing any key stores the alignment value into the memory and returns to the "TUNE" display.

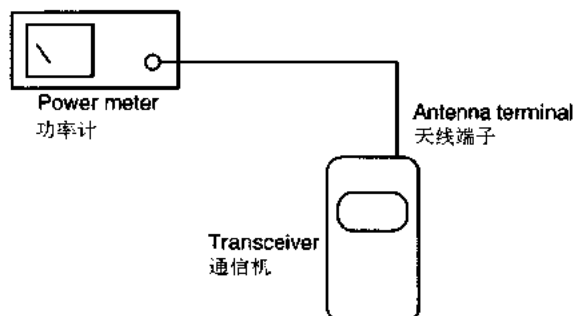**调整模式(维修通信机时所用的调整方法)****操作:**

1. 同时按住 [LAMP] 和 [TA] 键, 接通电源, 2 秒钟后进入“测试模式”。
2. 在测试模式中, 按 [TA] 键, 显示屏显示出频率, 选择好所需要的频率后, 同时按 [LAMP] 和 [LO] 键, 显示屏上出现“tUnE”字符, 进入调整模式。

1 调整发射功率

调整高发射功率值和低发射功率值


1. 把功率表连接到通信机上。
2. 选择好频率后, 使通信机处于显示“tUnE”的状态。
3. 一按 [PTT] 键, 就自动以高功率发射。此时, 显示屏上显示“H ×××”, (×××=0~254)。
4. 一边看着功率表, 一边用 [信道选择] 旋钮把发射功率调整到目的值。顺时针方向旋转 [信道选择] 旋钮, 发射功率变大, 逆时针方向旋转 [信道选择] 旋钮, 发射功率变小。
5. 一按 [PTT] 键以外的键, 调整值被存入存储器中, 通信机回到显示“tUnE”的状态。一按 [PTT] 键, 调整值被存入存储器中, 通信机切换到低功率状态发射, 此时显示“L ×××”。
6. 一边看着功率表, 一边用 [信道选择] 旋钮把发射功率调整到目的值。顺时针方向旋转 [信道选择] 旋钮, 发射功率变大, 逆时针方向旋转 [信道选择] 旋钮, 发射功率变小。
7. 按任意一个键, 调整值被存入存储器中, 通信机回到显示“tUnE”的状态。

ADJUSTMENT/调整

2 Aligning the Battery Reference Value

Use this procedure to adjust the reference value for issuing battery low voltage alarms.


1. Using an external power supply, feed in the reference value at which you wish to trigger the alarm.
2. Set the frequency and then set the "TUNE" display.
3. Transmission is performed automatically at Hi Power when the [TA] key is pressed. The display "B XXX" now appears. (XXX = 1 to 255)
4. Adjust by moving the [CHANNEL selector] counterclockwise when the red LED is lit, and by moving in the clockwise direction when the red LED is flashing. The point where the red LED is flashing indicates detection of the low voltage.
5. Pressing any key stores the reference value into the memory and returns to the "TUNE" display.

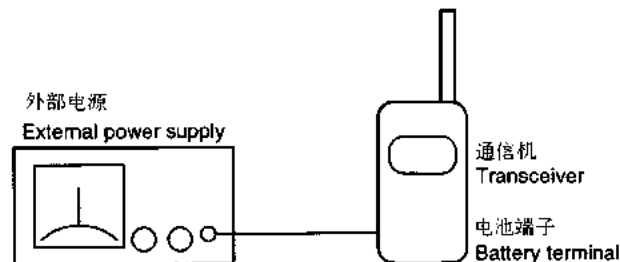

3 Storing the BUSY Reference Value

Use this procedure to align squelch values for 3 and 9. Other squelch levels are set based on these values.

1. Connect the signal generator to the transceiver.
2. Set the frequency and then set the "TUNE" display.
3. Input a signal at the level at which you want squelch 9 to open.
4. Press [MONI] to let the transceiver receive this signal. The display "9 XXX" now appears. (XXX = 1 to 255)
5. Turn the [CHANNEL selector] and align at the position where you want the squelch to open.
6. Pressing any key other than [MONI] stores this value into the memory and returns to the "TUNE" display. The display "3 XXX" now appears. (XXX = 1 to 255)
7. Next output a signal from the signal generator at which you want squelch 3 to open. Align by using the [CHANNEL selector] just as with squelch 9.
8. Pressing any key stores these values into the memory and returns to the "TUNE" display.

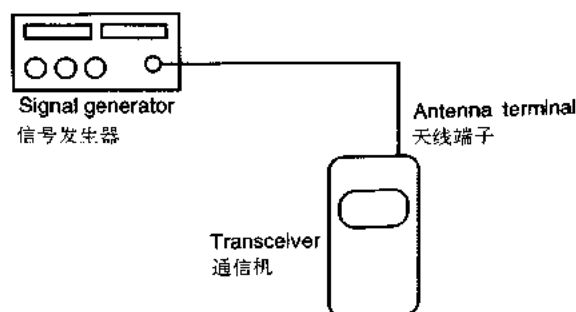

2 调整电池临界值

调整电池临界电平告警功能的临界值

1. 从外部给通信机提供一个希望能启动告警功能的电源电平。
2. 选择好频率后，使通信机处于显示“tUnE”的状态。
3. 按[TA]键，通信机自动以高功率发射。此时，显示“B XXX”。(XXX=1~255)。
4. 如果此时红色发射指示灯稳定发光，则向逆时针方向旋转[信道选择]旋钮，直到发射指示灯恰好闪烁；如果此时红色发射指示灯闪烁，则向顺时针方向旋转[信道选择]旋钮，直到发射指示灯恰好闪烁。发射指示灯闪烁就是检测出电池电压低于设定值而发出的告警信号。
5. 按任意一个键，调整值被存入存储器中，通信机回到显示“tUnE”的状态。

3 写入“繁忙”状态的基准值

调整静噪电平级3和9的值，其它静噪电平级的值根据3和9的值自动计算。


1. 把信号发生器连接到通信机上。
2. 选择好频率后，使通信机处于显示“tUnE”的状态。
3. 输入一个希望能恰好打开9级静噪的信号电平。
4. 按[MONI]键，开始进行接收。此时，显示屏上显示“9 XXX”。(XXX=1~255)
5. 旋转[信道选择]旋钮到静噪恰好开启的位置。顺时针方向旋转[信道选择]旋钮，静噪变深。
6. 按[MONI]键以外的键，调整值被存入存储器中，通信机回到显示“tUnE”的状态。按[MONI]键，调整值被存入存储器中，转换到对静噪电平3的调整。此时，显示屏上显示“3 XXX”。(XXX=1~255)
7. 从信号发生器输入一个希望能恰好打开3级静噪的信号电平。之后的操作和调整9级静噪电平的操作相同。
8. 按任意一个键，调整值被存入存储器中，通信机回到显示“tUnE”的状态。

ADJUSTMENT / 调整

4 Adjusting QT Deviation

Use this procedure to adjust the transmit QT deviation.


1. Connect the modulation analyzer to the transceiver as shown.
2. Select the frequency and QT, and then set the "TUNE" display.
3. Press [SCN] to automatically start transmission and send the preset QT. If the QT was set to OFF, then 67.0Hz is sent.
4. While observing the modulation analyzer, adjust the deviation with the [CHANNEL selector].
5. Pressing any key stores these values into the memory and returns to the "TUNE" display.

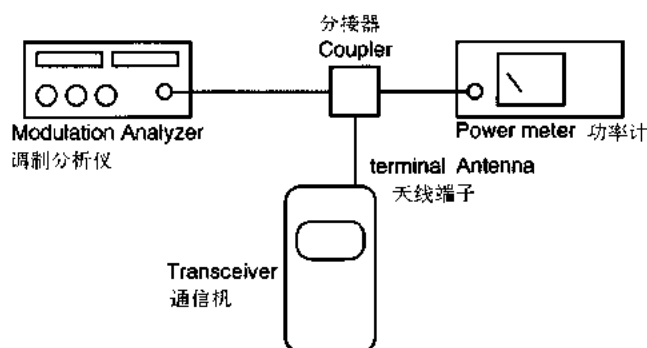

5 Adjusting DQT Deviation

Use this procedure to adjust the transmit QT deviation.

1. Connect the modulation analyzer to the transceiver as shown.
2. Select the frequency, and then set the "TUNE" display.
3. Press [DIAL] to automatically start transmission and send the DQT CODE 023 Normal.
4. While observing the modulation analyzer, adjust the deviation with the [CHANNEL selector].
5. Pressing any key stores these values into the memory and returns to the "TUNE" display.

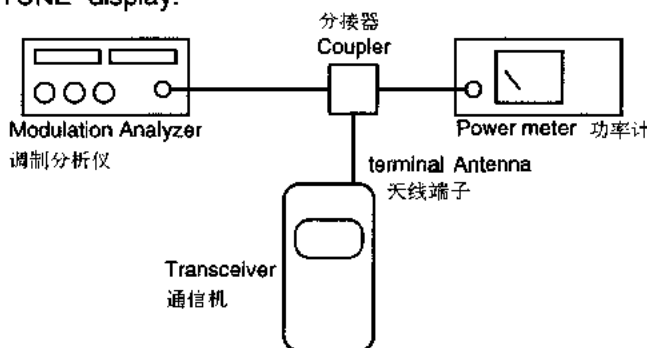

4 CTCSS调制频偏

调整发射CTCSS亚音频信号的调制频偏

1. 把调制分析仪连接到通信机上。
2. 选择好频率和CTCSS亚音频率后，使通信机处于显示“tUnE”的状态。
3. 按[SCN]键，通信机开始自动发出预先设定的亚音频信号。当设定CTCSS功能为OFF(无效)时，发出67.0Hz的亚音频信号。
4. 一边看着调制分析仪，一边用[信道选择]旋钮调整频偏。顺时针方向旋转[信道选择]旋钮，频偏加大。
5. 按任意一个键，调整值被存入存储器中，通信机回到显示“tUnE”的状态。

5 调整亚音数码的调制频偏

调整发射亚音数码信号的调制频偏

1. 把调制分析仪连接到通信机上。
2. 选择好频率后，使通信机处于显示“tUnE”的状态。
3. 按[DIAL]键，通信机开始自动发出023N的亚音数码。
4. 一边看着调制分析仪，一边用[信道选择]旋钮调整频偏。顺时针方向旋转[信道选择]旋钮，频偏加大。
5. 按任意一个键，调整值被存入存储器中，通信机回到显示“tUnE”的状态。

ADJUSTMENT / 调整

Use the jig (chassis) for adjustment to stabilize electrical operations. The frequency (TC1) and deviation (VR2) can be adjusted without using the jig.

(Remove the nameplate (B42-5656-04) on the chassis side.)

要调整(为防止电气动作的不稳定)时,请使用夹具(底盘)来进行。但是频率调整(TC1)和偏移调整(VR2)可以不需使用夹具来进行。(请剥离底盘侧的[B42-5656-04]。)

1. Jig for adjustment (part number A10-1368-03)

1. 调整用夹具(零件号: A10-1368-03)

2. Use the jig as follows:

1. Insert the coaxial antenna connector into the jig.
2. Place the unit on the jig and fix it with three screws ①.
3. Solder the antenna terminal to the terminal of the unit.

Notes:1. Do not install the NiCd battery when using the jig for adjustment, repair, or checking.
(If the NiCd battery is installed, the relay terminal (+) may be damaged.)


Notes:2. Supply power from an external power supply.
(Relay terminal: +; Jig (chassis): -)

2. 夹具使用方法



1. 将天线同轴连接器安装在夹具上。
2. 将装置安放在夹具上并用3个螺丝①来固定。
3. 将天线端子钎焊在装置的端子上。

注意: 1. 使用夹具进行调整及修理检查等时,不要装入镍铬电池。(如果装入镍铬电池,可能会破损中继端子⊕。)

2. 电源请利用外部电源来供应。(中继端子为⊕侧,夹具(底盘)为⊖侧。)

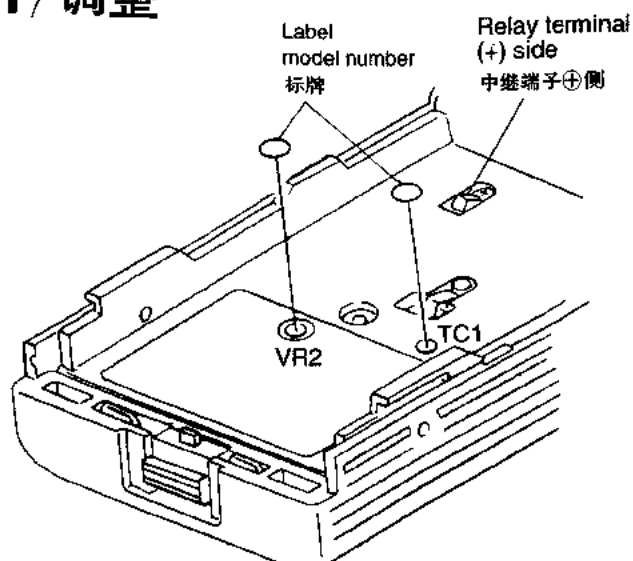

Jig for adjustment
调整用夹具

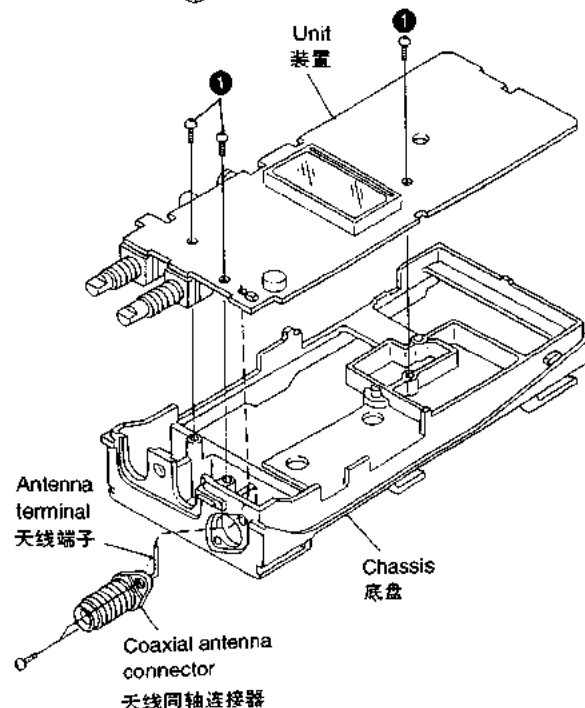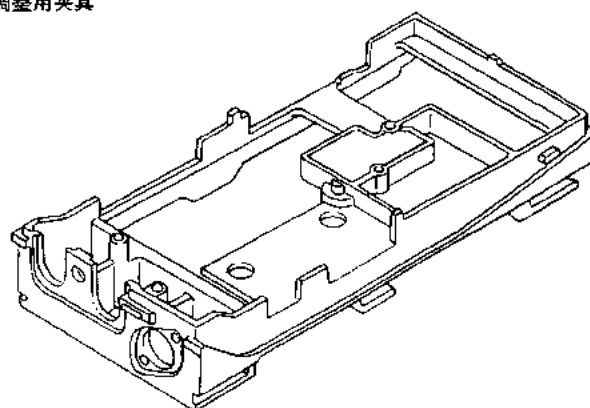

ADJUSTMENT

Section common to the transmitter and receiver (VCO)

Item	Condition	Measurement		Adjustment		Specifications/ Remarks
		Test equipment	Terminal	Parts	Method	
1. Setting	1) Power supply voltage Battery terminal: 7.5 V					
2. VCO lock voltage	1) CH: TX LO	Digital voltmeter	CV	TC2	Adjust to $1.0 \text{ V} \pm 0.1 \text{ V}$.	$1.0 \text{ V} \pm 0.1 \text{ V}$
	2) CH: TX HI	Digital voltmeter	CV		Confirm that it is 4.3 V or lower.	4.3 V or lower
	3) CH: RX LO	Digital voltmeter	CV	TC3	Adjust to $1.0 \text{ V} \pm 0.1 \text{ V}$.	$1.0 \text{ V} \pm 0.1 \text{ V}$
	4) CH: RX HI	Digital voltmeter	CV		Confirm that it is 4.3 V or lower.	4.3 V or lower

Receiver Section Adjustment

Item	Condition	Measurement		Adjustment		Specifications/ Remarks
		Test equipment	Terminal	Parts	Method	
1. Band-pass filter	1) Given frequency 2) Tra generator output -40 dBm Connect the spectrum analyzer to the TP terminal.	Tra generator Spectrum analyzer	ANT TP	L26 L33	Adjust the frequency so that it becomes the spectrum waveform shown in Fig. 1.	
2. Sensitivity	1) CH: RX LO CH: RX center CH: RX HI At each frequency: SSG output: -119 dBm MOD: 1kHz DEV: $\pm 3 \text{ kHz}$	SSG Oscilloscope AF. V.M Distortion meter	ANT SP		Check	SINAD: 12 dB or higher
3. Squelch	1) CH: RX LO MONI: ON	SSG Oscilloscope AF. V.M Distortion meter	ANT SP	Channel selector	Level 9 Adjust to close the squelch with the channel selector.	The squelch must be closed.
	2) Level 9 SSG output: -115 dBm MONI: ON					
	3) Level 3 SSG output: -128 dBm MONI: ON				Level 3 Adjust to close the squelch with the channel selector.	The squelch must be closed.
	4) Adjustment mode See 3.					

调整

收发共同部(VCO)


项 目	条 件	测 量 部 位		调 整 部 位		规 格
		测量机器	端子	部件	方 法	
1. 设置	1) 电源电压 蓄电池端子7.5V					
2. VCO 锁定电压	1) CH: TX LO	数字电压表	CV	TC2	调整成为 $1.0V \pm 0.1V$	$1.0V \pm 0.1V$
	2) CH: TX Hi	数字电压表	CV		确认成为4.3V以下	4.3V以下
	3) CH: RX LO	数字电压表	CV	TC3	调整成为 $1.0V \pm 0.1V$	$1.0V \pm 0.1V$
	4) CH: RX Hi	数字电压表	CV		确认成为4.3V以下	4.3V以下

接收部

项 目	条 件	测 量 部 位		调 整 部 位		规 格
		测量机器	端子	部件	方 法	
1. B. P.F.	1) 任意的频率	梯形波发生器 频谱分析器	ANT T. P	L26 L33	按图1的频谱分析器波形 进行调整	
	2) 梯形发生器输出 -40dBm 将频谱分析器连接到T. P端 子					
2. 灵敏度	1) CH: RX LO CH: RX Center CH: RX Hi 在各频率: SSG输出: -119dBm MOD : 1KHz DEV : $\pm 3\text{KHz}$	SSG 示波器 AF. V. M 失真系数计	ANT S. P.		确认	SINAD 12dB以上
3. 静噪	1) CH: RX LO MONI: ON	SSG 示波器 AF. V.M 失真系数计	ANT S. P.	信道 选择 开关	电平 9 用信道选择开关调整成为 闭合	应闭合
	2) 电平 9 SSG: -115dBm MONI: ON					
	3) 电平 3 SSG: -128dBm MONI: ON				电平 3 用信道选择开关调整成为 闭合	应闭合
	4) 调整模式 见 3					


ADJUSTMENT

Transmitter

Item	Condition	Measurement		Adjustment		Specifications/ Remarks
		Test equipment	Terminal	Parts	Method	
1. Transmit frequency	1) CH:TX center PTT:ON	Frequency counter	ANT	TC1	Adjust to ± 150 Hz.	Within ± 150 Hz
2. DQT/ Balance	1) CH:TX center	Modulation analyzer or linear detector Oscilloscope	ANT	VR1	Rectify the waveform to square wave.	
	2) Adjustment mode See 5. Press the [DIAL] key. LPF: 3 kHz					
3. Full power	1) CH: TX Center Battery terminal: 7.5 V PTT: ON	Power meter Ammeter	ANT	Channel selector	Turn the channel selector to increase the value. Verify that it is 4.8 W or higher.	4.8 W or higher
	2) Adjustment mode See 1.					
4. High power	1) CH: TX center Battery terminal: 7.5 V PTT: ON	Power meter Ammeter	ANT	Channel selector	Adjust it to $4.5 \text{ W} \pm 0.1 \text{ W}$ with the channel selector.	$4.5 \text{ W} \pm 0.1 \text{ W}$ 2.4 A or lower
	2) Adjustment mode See 1.					
	3) CH: TX Hi Battery terminal: 7.5 V PTT: ON				Check	4.0 ~ 5.5W 2.4 A or lower
	4) CH: TX LO Battery terminal: 7.5 V PTT: ON				Check	4.0 ~ 5.5W 2.4 A or lower
					To make a check, change the "TUNE" mode to the VFO mode. The LO indicator must be off on the LCD.	
5. Low power	1) CH: TX center PTT: ON	Power meter Ammeter	ANT	Channel selector	Adjust it to $1.0 \text{ W} \pm 0.1 \text{ W}$ with the channel selector.	$1.0 \pm 0.1 \text{ W}$ 1.0 A or lower
	2) Adjustment mode See 1.					
	3) CH: TX Hi PTT: ON				Check	0.5 ~ 1.5W
	4) CH: TX LO Battery terminal: 7.5 V				Check	0.5 ~ 1.5W
					To make a check, change the "TUNE" mode to the VFO mode. The LO indicator must appear on the LCD.	
6. Modulation	1) CH: TX Hi	Modulation analyzer or linear detector Oscilloscope Low-frequency oscillator AF. V.M.	ANT MIC	VR2	Adjust it to $\pm 4.0 \text{ kHz} \pm 100 \text{ Hz}$.	$\pm 4.0 \text{ kHz} \pm 100 \text{ Hz}$
	2) Low-frequency oscillator output Closed: 1 kHz 60mV PTT:ON M type 150mV PTT:ON K type				MOD METER L.P.F 15kHz	
	3) Low-frequency oscillator output 20 dBm down 1kHz:6mV M type 1kHz:15mV K type				Check	$\pm 2.2 \text{ kHz} \sim 3.8 \text{ kHz}$

调整

发射部

项 目	条 件	测 量 部 位		调 整 部 位		规 格
		测量机器	端子	部件	方 法	
1. 发射频率	1) CH: TX Center PTT: ON	频率计	ANT	TC1	调整成为 $\pm 150\text{Hz}$	$\pm 150\text{Hz}$ 以内
2. DQT/平衡	1) CH: TX Center 2) 调整模式 见 5 按下(DIAL)键 LPP: 3KHz	调制分析器 或 线性检波器 示波器	ANT	VRI	将波形整形为矩形波 列出照片 1	
3. 全功率	1) CH: TX Center 蓄电池端子 7.5V PTT: ON 2) 调整模式 见 1	功率计 电流计	ANT	信道 选择 开关	旋转信道选择开关来增大 数值并确认成为 4.8W 以 上	4.8W 以上
4. 高功率	1) CH: TX Center 蓄电池端子 7.5V PTT: ON	功率计 电流计	ANT	信道 选择 开关	使用信道选择开关来调整 成为 $4.5\text{W} \pm 0.1\text{W}$	$4.5\text{W} \pm 0.1\text{W}$ 2.4A 以下
	2) 调整模式 见 1				确认	$4.0 \sim 5.5\text{W}$ 2.4A 以下
	3) CH: TX Hi 蓄电池端子 7.5V PTT: ON				确认	$4.0 \sim 5.5\text{W}$ 2.4A 以下
	4) CH: TX LO 蓄电池端子 7.5V PTT: ON				确认在经过 "TUNE" 而在 VFO 模式进行 LCD 上 LO 显示应 熄灭	
5. 低功率	1) CH: TX Center PTT: ON	功率计 电流计	ANT	信道 选择 开关	使用信道选择开关来调整 成为 $1.0\text{W} \pm 0.1\text{W}$	$1.0 \pm 0.1\text{W}$ 1.0A 以下
	2) 调整模式 见 1				确认	$0.5\text{W} \sim 1.5\text{W}$
	3) CH: TX Hi PTT: ON				确认	$0.5\text{W} \sim 1.5\text{W}$
	4) CH: TX LO PTT: ON 蓄电池端子 7.5V				确认在经过 "TUNE" 而在 VFO 模式进行 LCD 上 LO 显示应 亮灯	
6. 调制度	1) CH: TX Hi	调制分析器 或 线性检波器 示波器 低频振荡器 AF. V. M	ANT MIC	VR2	调整成为 $\pm 4.0\text{kHz}$ $\pm 100\text{Hz}$	$\pm 4.0\text{kHz} \pm 100\text{Hz}$
	2) 低频振荡器输出 1KHz 60mV PTT: ON M 型 150mV PTT: ON K 型				MOD METER L. P. F. 15KHz	
	3) 低频振荡器输出 降低 20dBm 1KHz: 6mV M 型 1KHz: 15mV K 型				确认	$\pm 2.2 \sim 3.8\text{KHz}$

ADJUSTMENT

Transmitter

Item	Condition	Measurement		Adjustment		Specifications/ Remarks
		Test equipment	Terminal	Parts	Method	
7. Transmit S/N	1) CH:TX center HPF:300Hz LPF:3kHz DEMP:750 μ s	Modulation analyzer or linear detector Oscilloscope Low-frequency oscillator AF. V.M.	ANT MIC		Check Adjust it to 0.65kHz \pm 50Hz with the channel selector	37 dB or higher
8. QT DEV	1) CH: TX center	Modulation analyzer or linear detector Oscilloscope Low-frequency oscillator AF. V.M.	ANT MIC	Channel selector	Adjust it to 0.6 kHz \pm 50 Hz with the channel selector.	0.6kHz \pm 50Hz
	2) QT: 250.3 Hz					
	3) Adjustment mode See 4. Press the [SCN] key. LPF: 3 kHz					
9. DQT DEV K. TYPE ONLY	1) CH:TX center	Modulation analyzer or linear detector Oscilloscope	ANT	Channel selector	Adjust it to 0.6 kHz \pm 50 Hz with the channel selector.	0.6kHz \pm 50Hz
	2) Adjustment mode See 5. Press the [DIAL] key. LPF: 3 kHz					
10. DTMF DEV	1)CH:TX center	Modulation analyzer or linear detector Oscilloscope	ANT	VR3	Adjust it to 3.2 kHz \pm 0.1 kHz.	3.2kHz \pm 0.1kHz
	2) Set as following using the [9] key: PTT:ON LPF:15kHz					
11. Battery warning	1) Battery terminal: 5.8 V			Channel selector	Adjust so that the LED flashes using the channel selector.	The LED must flash.
	2) Adjustment mode See 2. Press the [TA] key.					
	3) Battery terminal: 6.3 V PTT:ON				Verify that the LED lights.	Check

调整


发射部

项 目	条 件	测 量 部 位		调 整 部 位		规 格
		测量机器	端子	部件	方 法	
7. 发射 信噪比	1) CH: TX Center HPF : 300Hz LPF : 3kHz DEMP : 750 μ S	调制分析器 或 线性检波器 示波器 低频振荡器 AF, V, M	ANT MIC		确认	37dB以上
8. QT DEV	1) CH: TX Center	调制分析器 或 线性检波器 示波器 低频振荡器 AF, V, M	ANT MIC	信道 选择 开关	使用信道选择开关来调整 成为0.6kHz \pm 50Hz	0.6kHz \pm 50Hz
	2) QT : 250.3Hz					
	3) 调整模式 见 4 按下(SCN)键 L. P. F. : 3kHz					
9. DQT DEV 仅K型	1) CH: TX Center	调制分析器 或 线性检波器	ANT	信道 选择 开关	使用信道选择开关来调整 成为0.6kHz \pm 50Hz	0.6kHz \pm 50Hz
	2) 调整模式 见 5 按下(DIAL)键 L. P. F. : 3kHz					
10. DTMF DEV	1) CH: TX Center	调制分析器 或 线性检波器	ANT	VR3	调整成为3.2kHz \pm 0.1kHz	3.2kHz \pm 0.1kHz
	2) 用⑨键 PTT : ON L. P. F. : 15kHz					
11. 蓄电池 报警	1) 蓄电池端子5.8V			信道 选择 开关	在LED闪烁的点用信道 选择开关进行调整	LED闪烁
	2) 调整模式 见 2 按下(TA)键					
	3) 蓄电池端子6.3V PTT : ON				确认LED发亮	确认


ADJUSTMENT / 调整

BPF-Wave


(M, K type)

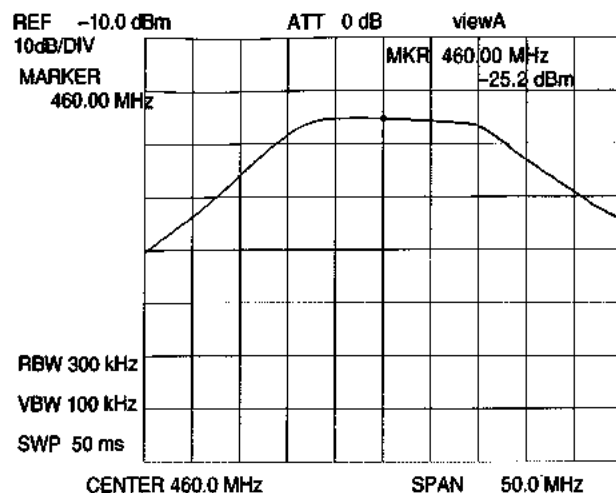


(K2 type)

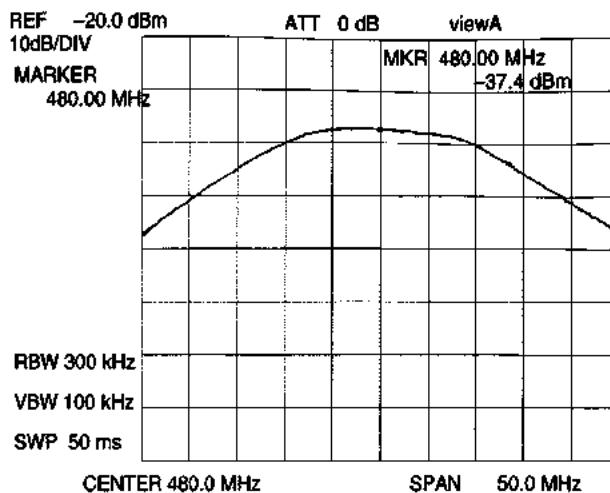

(K3 type)

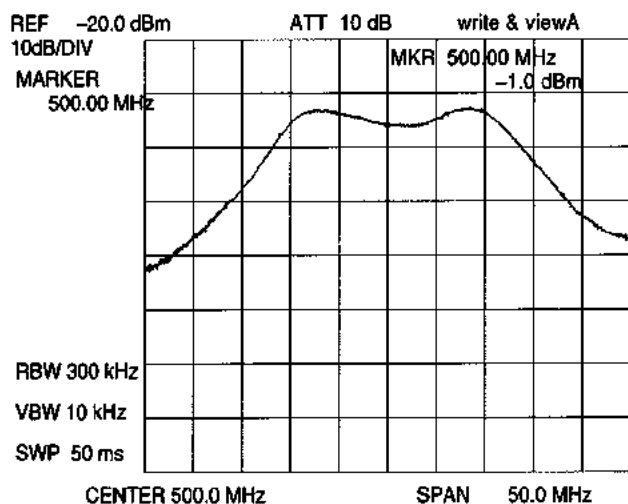

(K4 type)

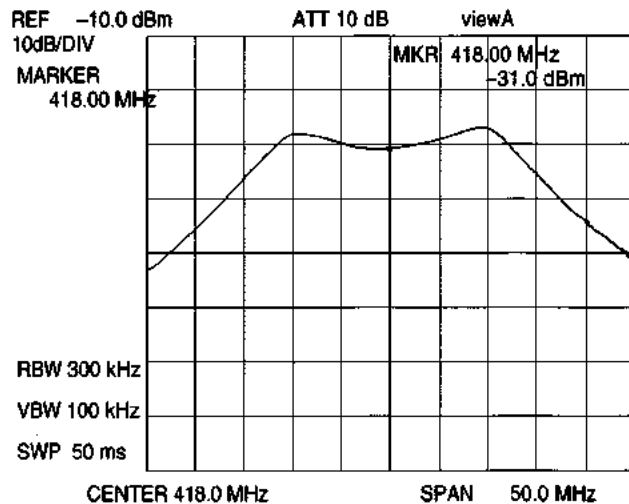

(M4 type)


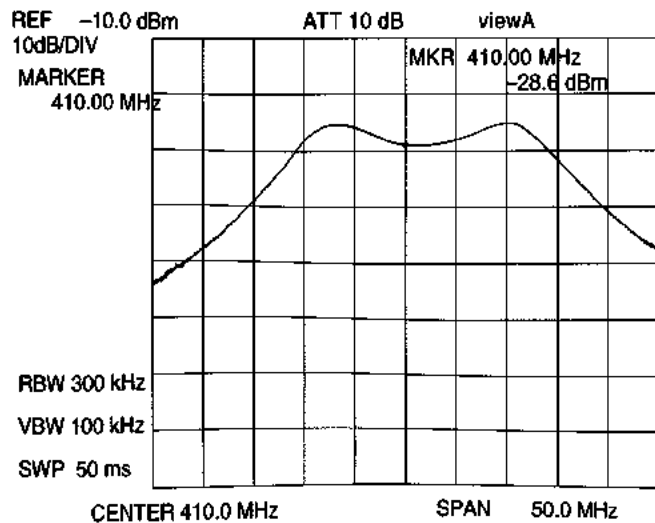


Fig.1

TK-370/378 PC BOARD VIEWS / 印刷线路板图


TX-RX UNIT (X57-4860-XX) Component side view
-15:K, -16:K2, -17:K3, -18:K4, -20:M, -21:M4

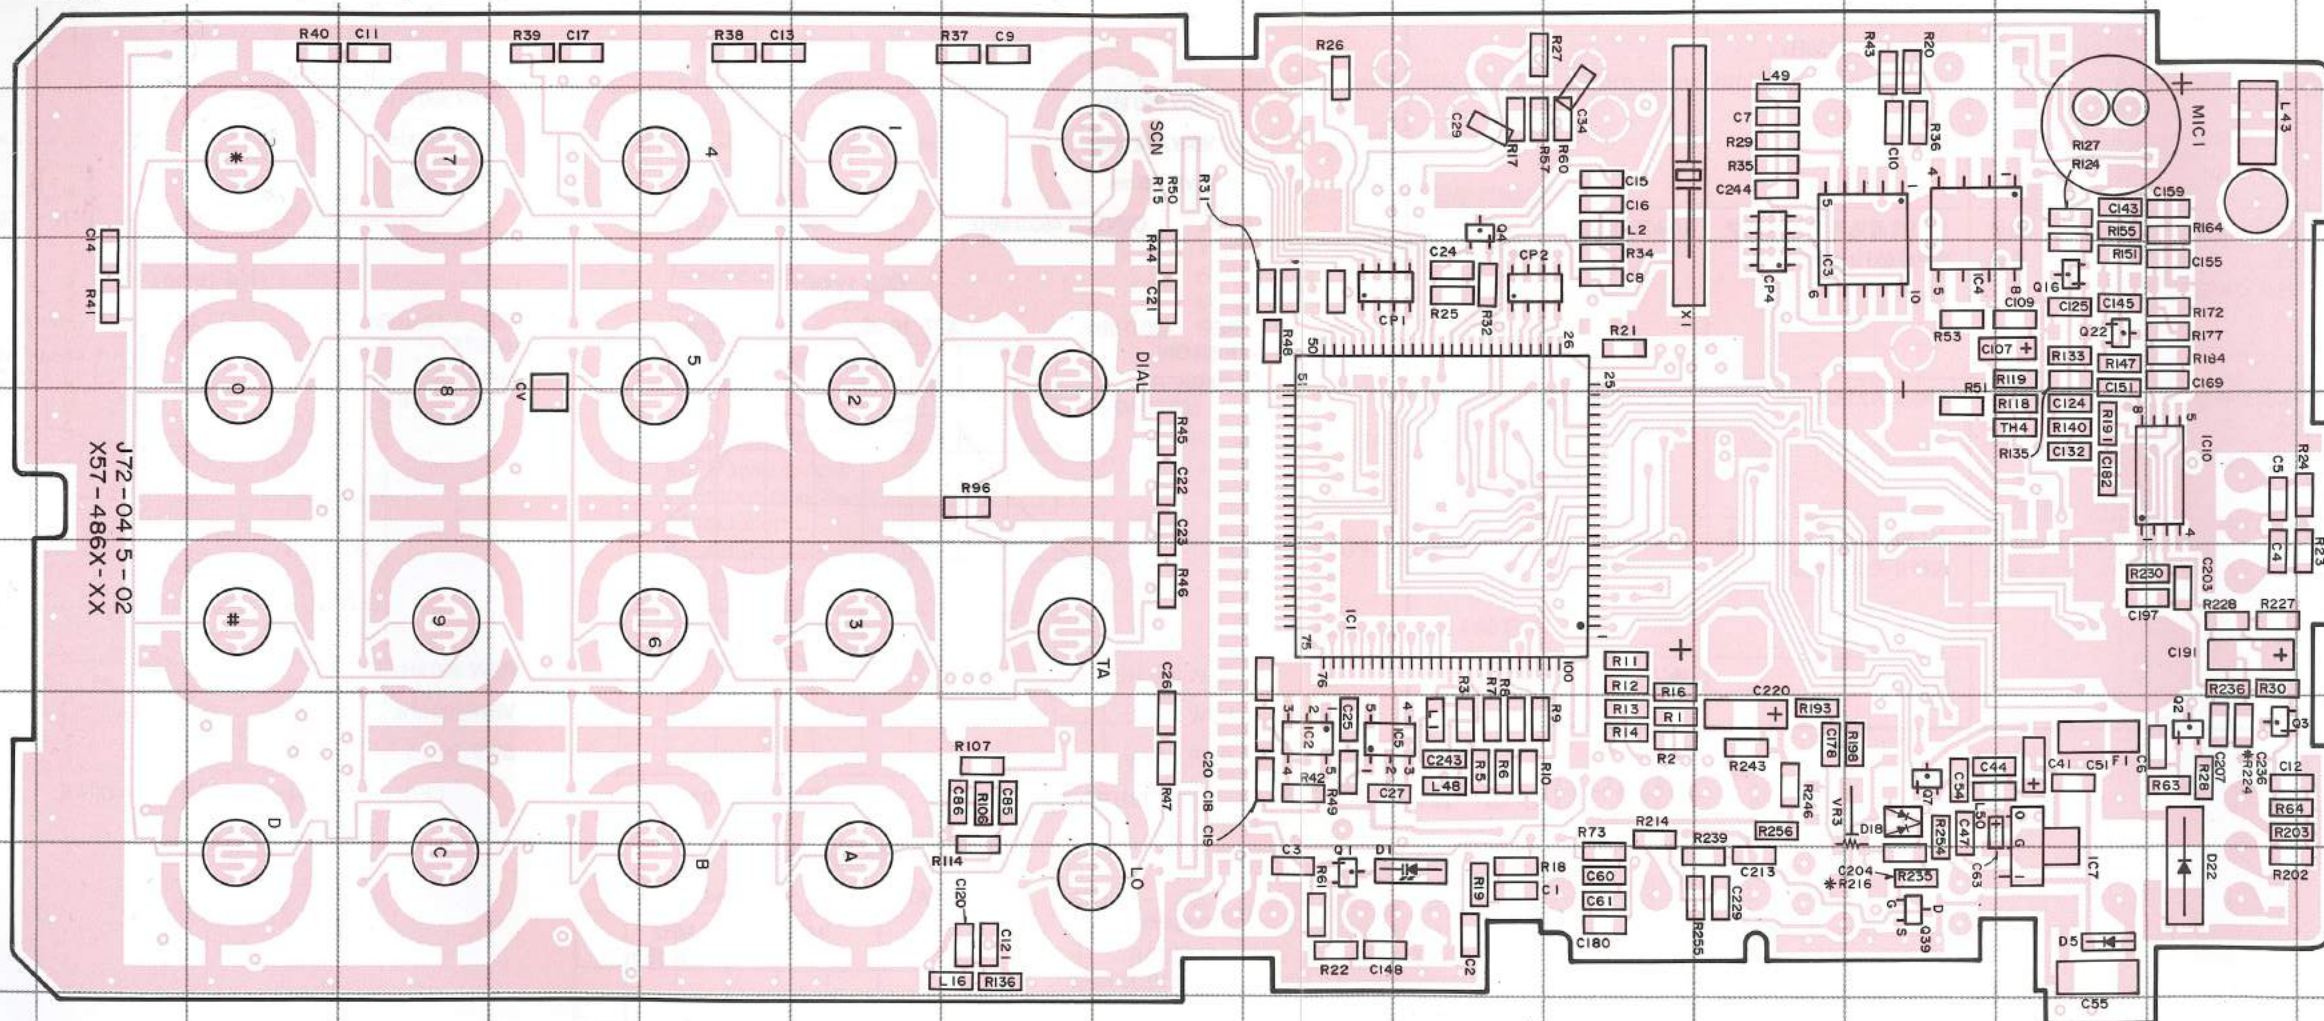


TX-RX UNIT(X57-486)
(Component side)

Ref. NO.	Address
IC1	7K
IC2	9J
IC3	5N
IC4	5N
IC5	9J
IC7	10O
IC10	7P
Q1	10J
Q2	9P
Q3	9P
Q4	5K
Q7	9N
Q16	6O
Q22	6O
Q39	10N
D1	10K
D5	10O
D18	9M
D22	10P


Pattern	Component side
Pattern 1	
Pattern 2	
Pattern 3	
Pattern 4	
Pattern 5	
Pattern 6	
	Foil side




LC73881M




NJM2100V



DTA114YE
DTC114EE
DTC114YE
2SC4617




2SK1824



M38267M8L150GP

PC BOARD VIEWS / 印刷线路板图 TK-370/378












TX-RX UNIT (X57-4860-XX) Foil side view
-15:K, -16:K2, -17:K3, -18:K4, -20:M, -21:M4

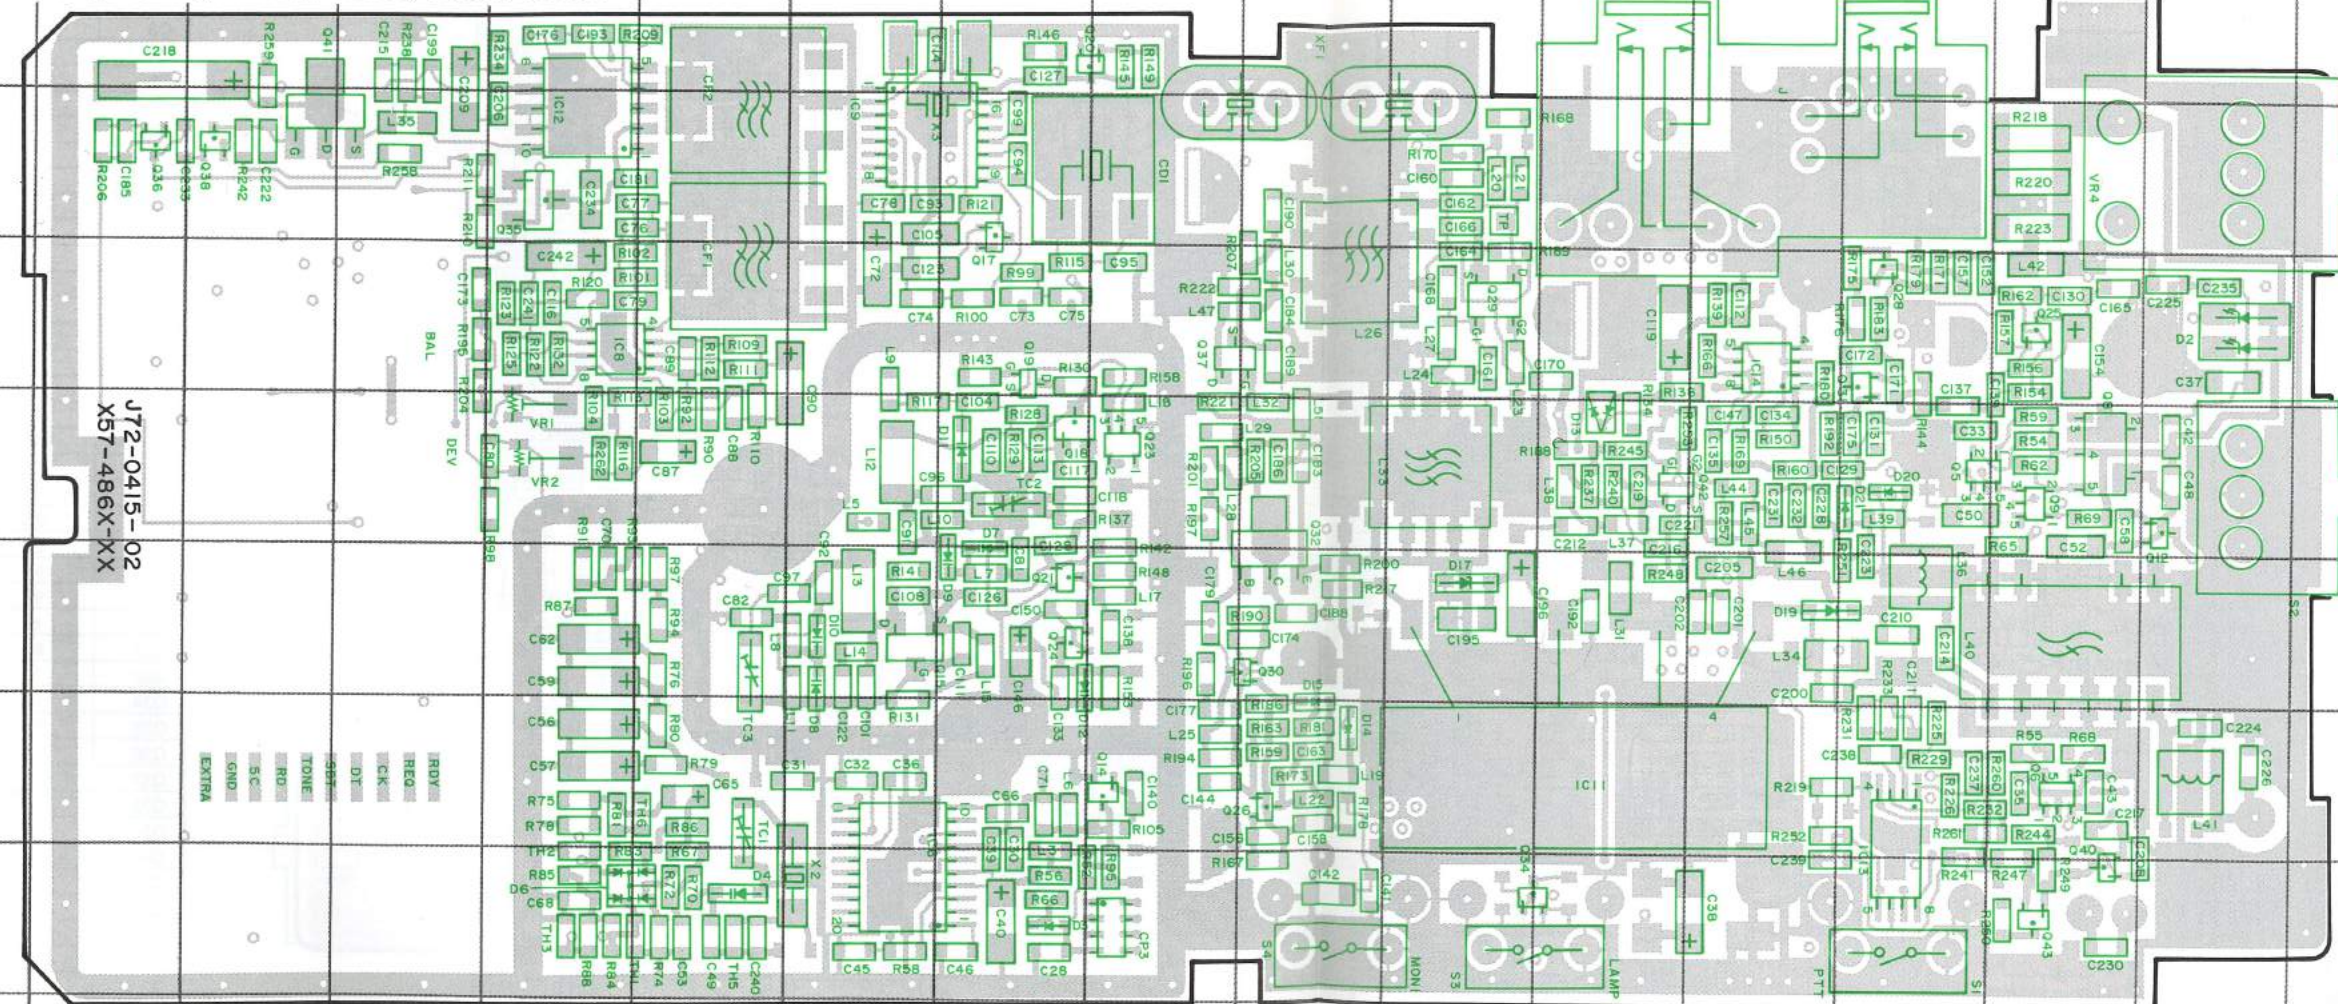

J72-0415-02
X57-486X-XX


TX-RX UNIT (X57-486)
(Foil side)

Ref. NO.	Address
IC6	10G
IC8	6E
IC9	5H
IC11	9M
IC12	5E
IC13	9N
Q5	7O
Q6	9O
Q8	7O
Q9	7O
Q12	8P
Q14	6M
Q15	8G
Q17	5H
Q18	7H
Q19	6H
Q20	4H
Q21	8H
Q23	7I
Q24	8H
Q25	6O
Q26	9J
Q28	6N
Q29	6K
Q30	8J
Q31	6N
Q32	7J
Q34	10K
Q35	5E
Q36	5B
Q37	6I
Q38	5C
Q40	9O
Q41	5C
Q42	7L
Q43	10O
D2	6P
D3	10H
D4	10F
D6	10E
D7	7H
D8	8G
D9	8H
D10	8G
D11	7H
D12	8H
D13	7L
D14	9J
D15	8J
D17	7I
D19	8M
D20	7N
D21	7M



TK-370/378 PC BOARD VIEWS / 印刷线路板图



TX-RX UNIT (X57-4860-XX) Component side view + Foil side view
-15:K, -16:K2, -17:K3, -18:K4, -20:M, -21:M4

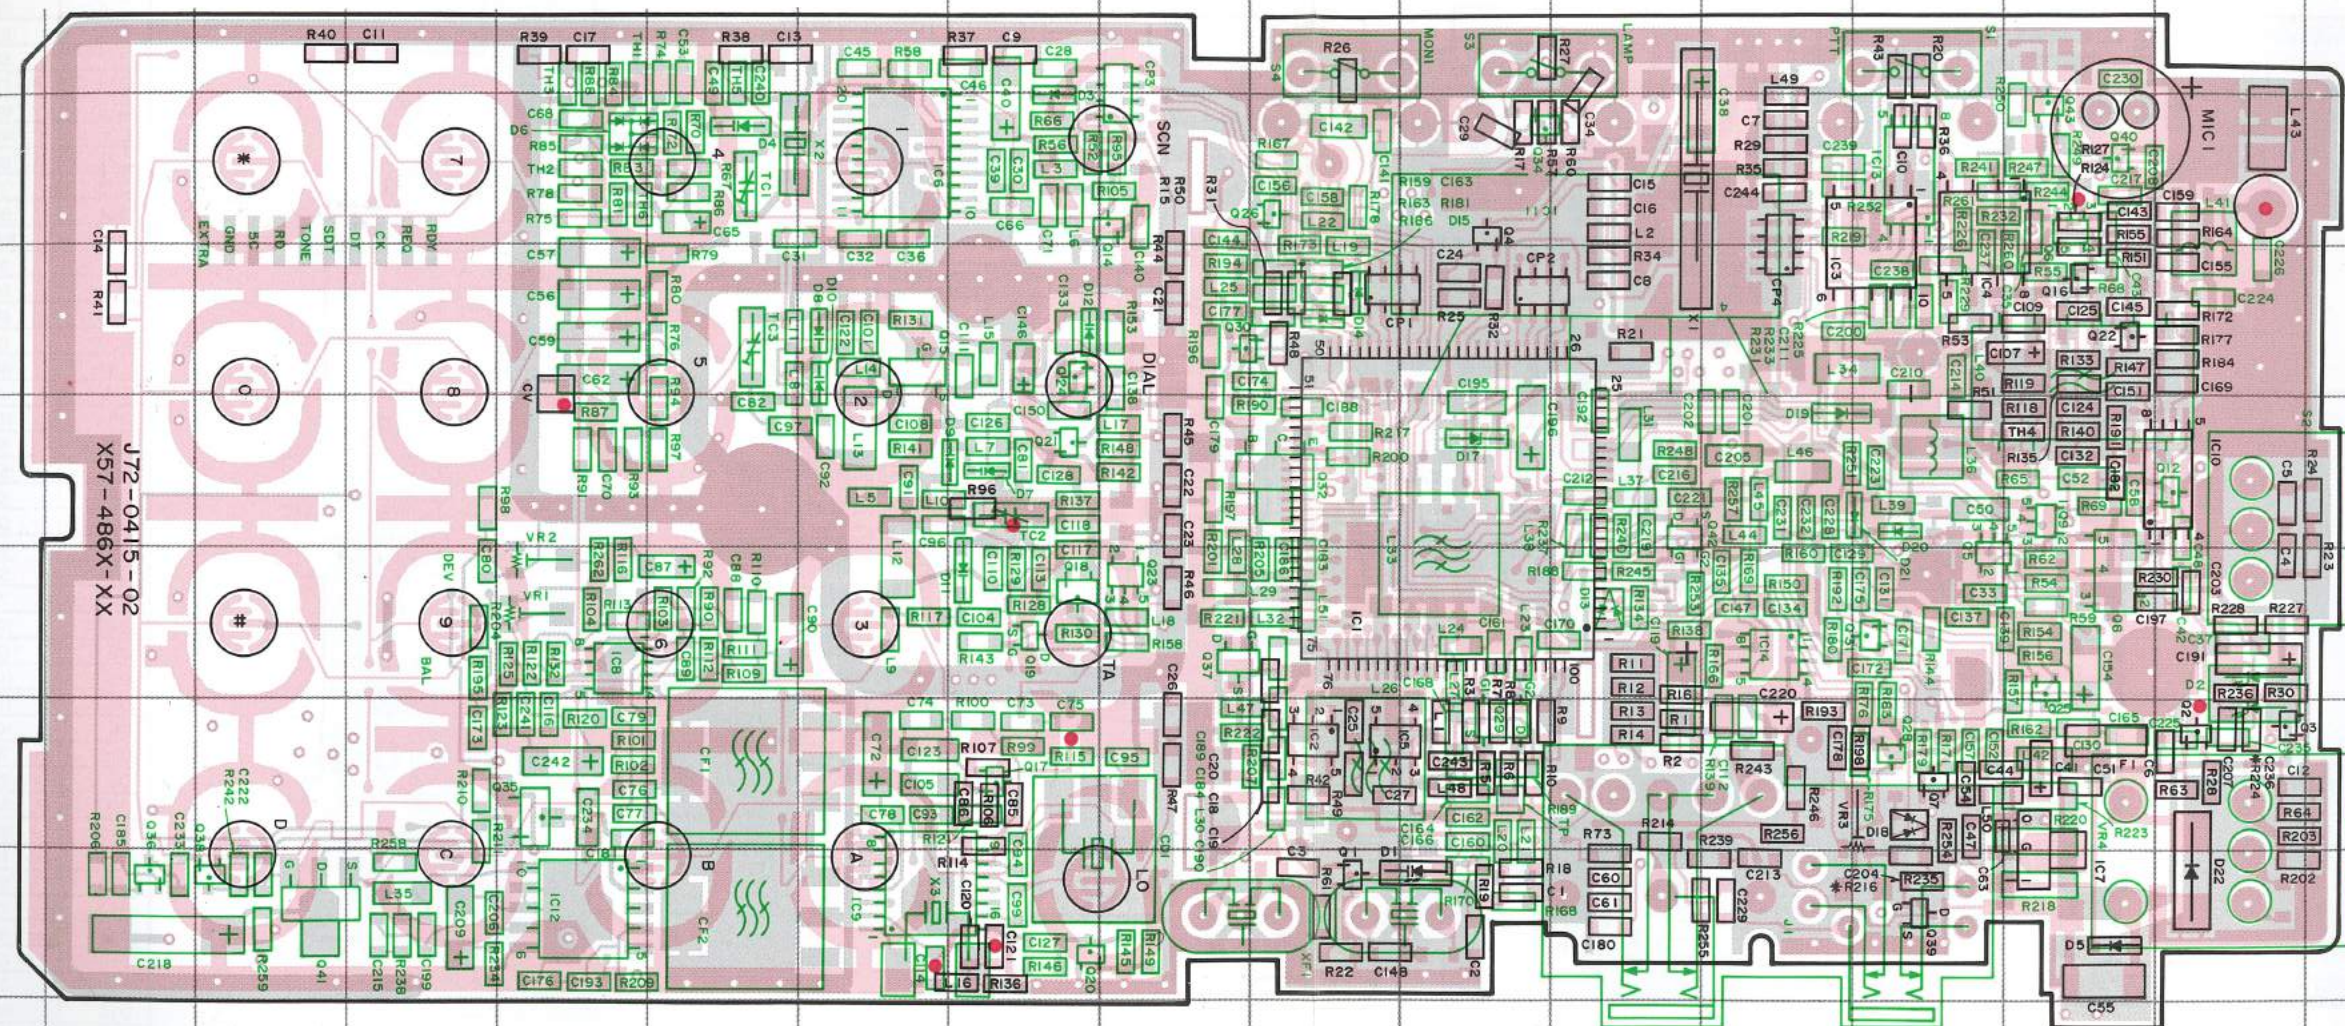


TX-RX UNIT(X57-486)
(Component side) + (Foil side)

Ref. NO.	Address
IC1	8J
IC2	9J
IC3	6M
IC4	6N
IC5	9J
IC6	5G
IC7	10O
IC8	8E
IC9	10G
IC10	7P
IC11	5L
IC12	10E
IC13	5N
IC14	8M
Q1	10J
Q2	9P
Q3	9P
Q4	5K
Q5	8N
Q6	5O
Q7	9N
Q8	8O
Q9	7O
Q12	7P
Q14	5I
Q15	6G
Q16	6O
Q17	9H
Q18	8H
Q19	8H
Q20	10H
Q21	7H
Q22	6O
Q23	8I
Q24	6H
Q25	8O
Q26	5J
Q28	9N
Q29	9K
Q30	6I
Q31	8N
Q32	7J
Q34	5K
Q35	9E
Q36	10B
Q37	8I
Q38	10C
Q39	10N
Q40	5O
Q41	10C
Q42	7L
Q43	5O
D1	10K
D2	8P
D3	4H
D4	5F
D5	10O
D6	5E
D7	7H
D8	6G
D9	7H
D10	6G
D11	8H
D12	6H
D13	8L
D14	6J
D15	5K
D17	7K
D18	9N
D19	7M
D20	7N
D21	7N
D22	10P

• Connect 1 and 6.

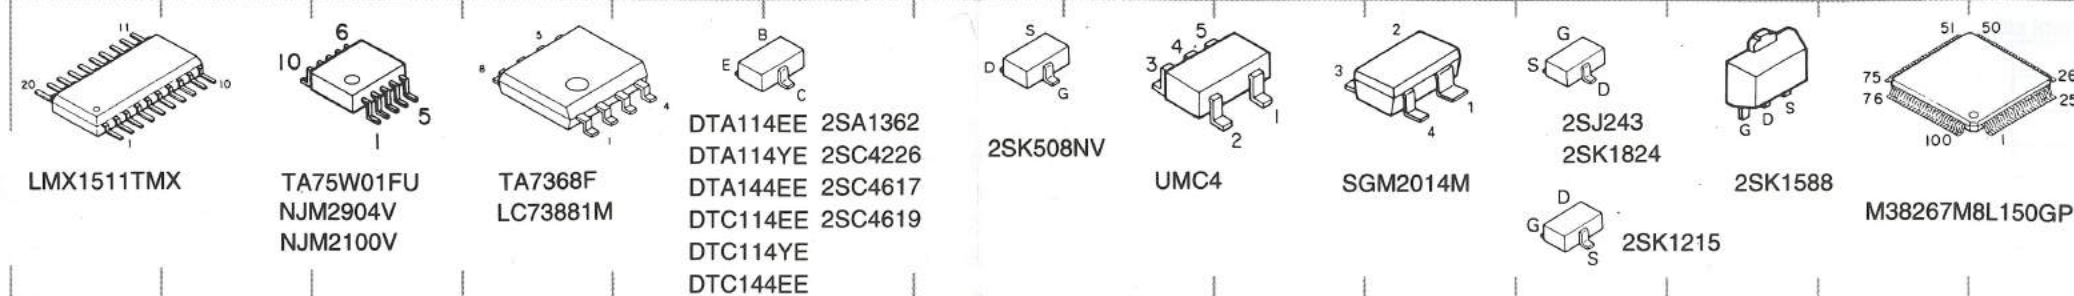


LMX1511TMX	TA75W01FU NJM2904V NJM2100V	TA7368F LC73881M	DTA114EE 2SA1362 DTA114YE 2SC4226 DTA144EE 2SC4617 DTC114EE 2SC4619 DTC114YE DTC144EE	2SK508NV	UMC4	SGM2014M	2SJ243 2SK1824	2SK1588	M38267M8L150GP
------------	-----------------------------------	---------------------	--	----------	------	----------	-------------------	---------	----------------

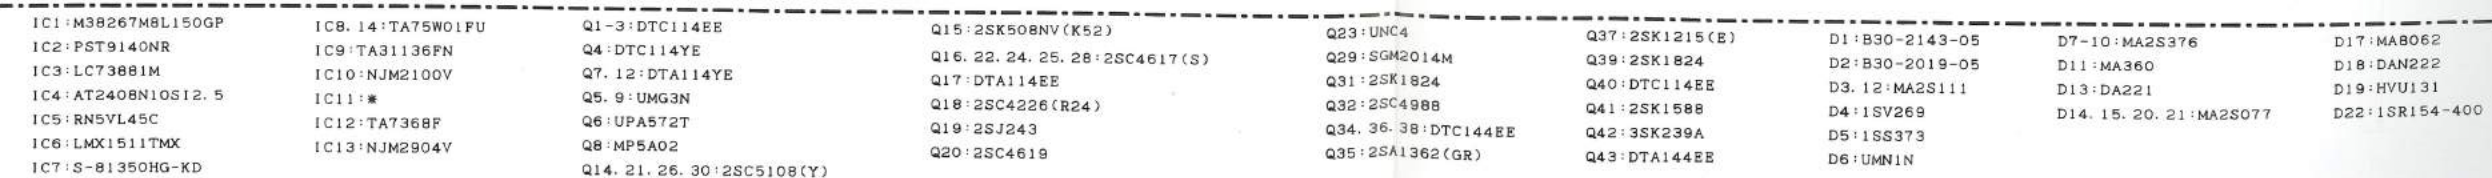

	Ver.	R106	R131	R136	R149	R177	R190	R200	R216	R221	R222	R224	R230	R236	R240	C71	C75	C91	C92	C96	C97	C98	C101	C107	C108	C110	C111	C117	C118	C124	C125	C143	C145	C148	C162	C168	C170	C179	C184	C197	C200	C210	C212	C224	C226	C228	C231	C232	L13	L19	L25	L26	L27	L28	L30	L32	L33	L37	L	
TK-378	0-20	M	1k	100	10k	560	4.7k	47	22	47k	1.8k	560	4.7k	220k	10k	3.3k	2p	22p	6p	22p	6p	33p	3p	5p	0.01u	8p	5p	10p	6p	10p	2700p	820p	2700p	820p	6p	15p	3p	1.5p	7p	10p	2200p	3p	3p	12p	3p	6p	2.5p	2.5p	2.5p	23n	18n	15n	1074	27n	15n	6.8n	33n	1074	39n	6
	0-21	M4	1.5k	100	27k	470	5.6k	68	27	47k	470	560	4.7k	220k	10k	3.3k	3p	27p	12p	220p	7p	33p	3p	4p	8200p	12p	6p	13p	8p	8p	2700p	820p	2700p	820p	6p	18p	2p	4p	5p	10p	2200p	4p	6p	18p	1p	4p	3p	3p	3.5p	27n	39n	22n	1148	47n	18n	18n	47n	1148	56n	6
TK-370	0-15	K	1k	100	10k	560	6.8k	47	22	-	1.8k	560	-	120k	15k	3.3k	2p	22p	6p	22p	6p	33p	3p	5p	0.012u	8p	5p	10p	6p	10p	3300p	820p	3300p	560p	6p	15p	3p	1.5p	7p	10p	5600p	5p	5p	12p	5p	3p	2.5p	2.5p	23n	18n	15n	1074	27n	15n	6.8n	33n	1074	39n	6	
	0-16	K2	1k	150	10k	560	5.6k	47	22	-	-	820	-	120k	15k	1k	2p	22p	6p	33p	6p	15p	-	2p	2.2u	8p	5p	10p	6p	10p	3300p	560p	3300p	560p	6p	15p	-	1.5p	7p	7p	5600p	3p	-	15p	5p	-	3p	4p	2.5p	23n	-	15n	1148	-	15n	6.8n	33n	1148	39n	6
	0-17	K3	1.5k	150	27k	470	5.6k	47	22	-	-	820	-	120k	15k	1k	2p	22p	6p	33p	6p	15p	-	2p	2.2u	8p	5p	10p	6p	10p	3300p	560p	3300p	560p	6p	18p	-	1.5p	7p	7p	5600p	3p	-	15p	5p	-	3p	4p	2.5p	23n	-	15n	1150	-	15n	8.2n	33n	1150	39n	6
	0-18	K4	1k	100	10k	560	5.6k	68	27	-	470	560	-	120k	15k	3.3k	3p	22p	12p	220p	7p	33p	3p	4p	8200p	12p	6p	13p	8p	8p	3300p	560p	3300p	560p	6p	15p	2p	4p	5p	10p	5600p	3p	6p	18p	4p	-	3p	3p	3.5p	27n	39n	22n	1148	47n	18n	18n	47n	1148	56n	6

SCHEMATIC DIAGRAM / 原理图 TK-370/378

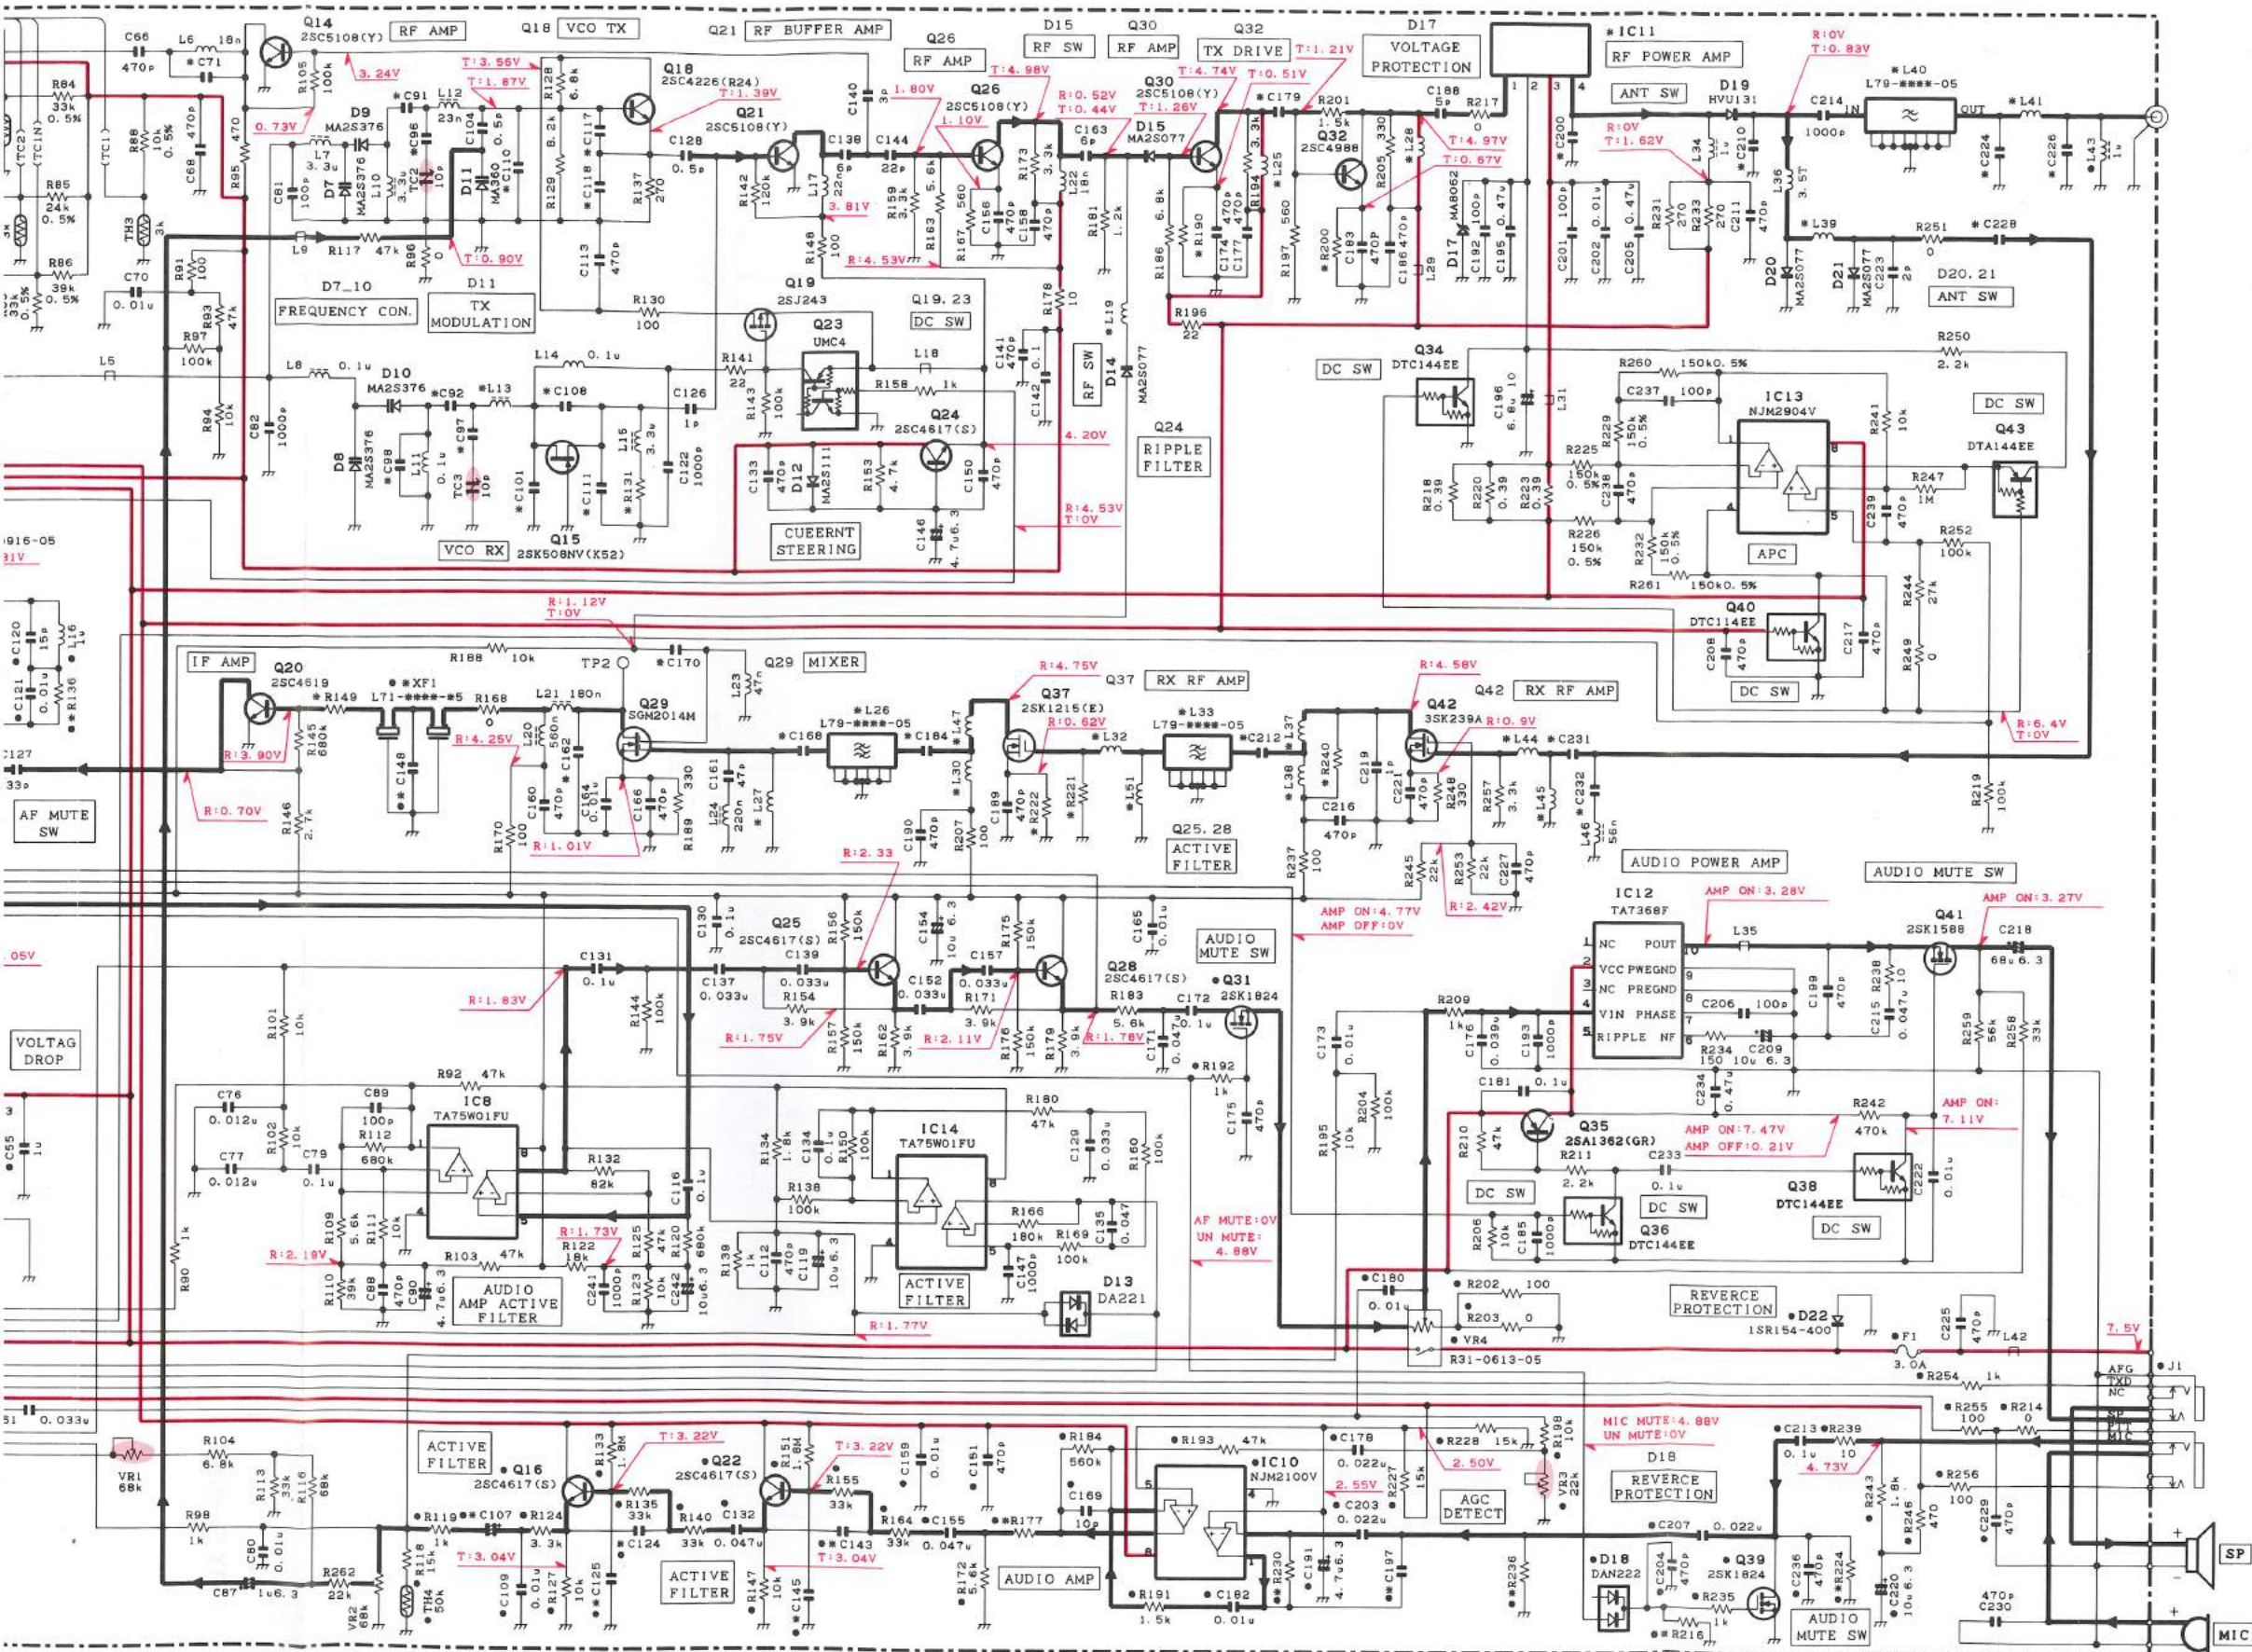


L13	L19	L25	L26	L27	L28	L30	L32	L33	L37	L38	L39	L40	L41	L44	L45	L47	IC11	X3	XF1
23n	18n	15n	1074	27n	15n	6.8n	47n	1148	39n	6.8n	6.8n	1175	2.5T	47n	22n	39n	M68732M	1661	0449-0
27n	39n	22n	1148	47n	18n	18n	47n	1148	56n	22n	10n	1174	3.5T	68n	33n	56n	M68732L	1662	0400-1
23n	18n	15n	1074	27n	15n	6.8n	33n	1074	39n	6.8n	6.8n	1175	2.5T	47n	22n	39n	M68732H	1661	0409-1
23n	-	15n	1146	-	15n	9.2n	33n	1146	39n	6.8n	10n	1175	1.5T	39n	22n	33n	M68732SH	1661	0409-1
23n	-	15n	1150	-	15n	8.2n	33n	1150	39n	6.8n	10n	1175	1.5T	39n	22n	33n	M68732UH	1662	0449-0
27n	39n	22n	1148	47n	18n	18n	47n	1148	56n	22n	15n	1174	3.5T	68n	33n	56n	M68732L	1662	0400-0

Note) ● Ref. No. : Parts of pattern 1.


TK-370/378 TK-370/378


BLOCK DIAGRAM / 方框图

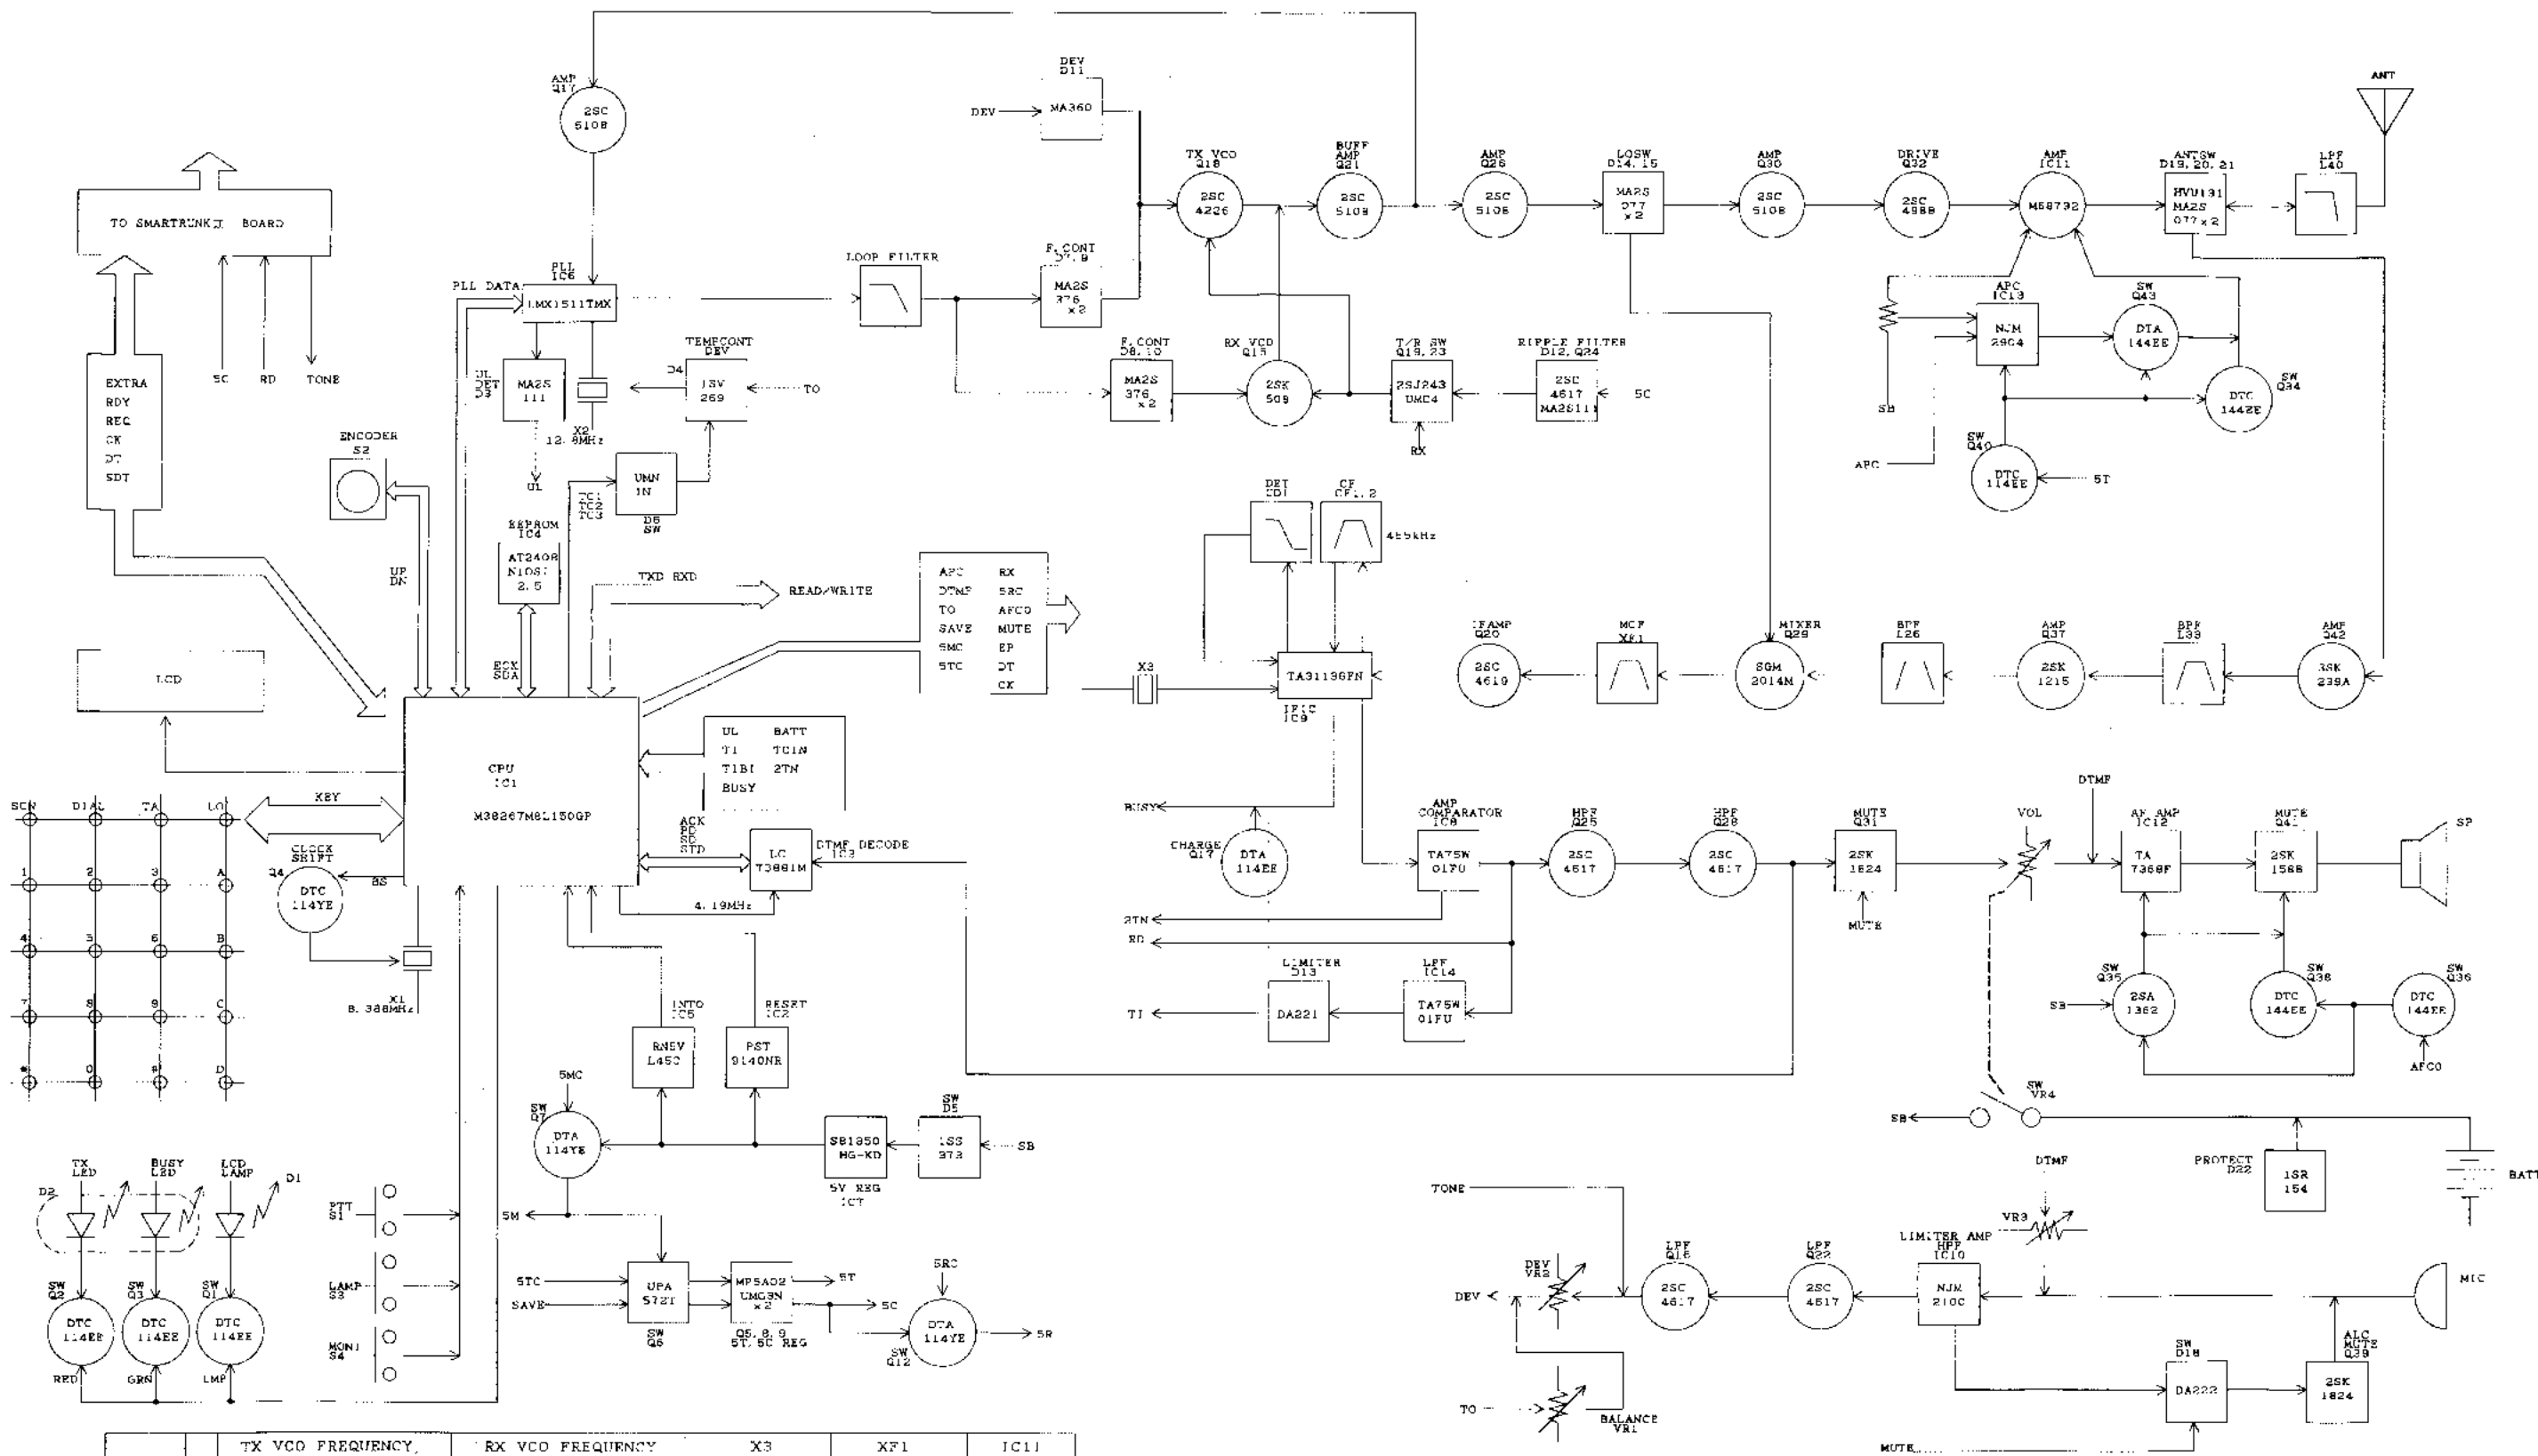

		TX VCO FREQUENCY	RX VCO FREQUENCY	X3	XF1	IC11
TK-378	M	450.000-470.000 MHz	404.950-424.950 MHz	44.595MHz	45.05MHz	M68732H
	M4	400.000-420.000 MHz	353.650-373.650 MHz	46.805MHz	46.35MHz	M68732L
TK-370	K	450.000-470.000 MHz	404.950-424.950 MHz	44.595MHz	45.05MHz	M68732H
	K2	470.000-490.000 MHz	424.950-444.950 MHz	44.595MHz	45.05MHz	M68732SH
	K3	490.000-512.000 MHz	443.650-465.650 MHz	46.805MHz	46.35MHz	M68732UH
	K4	406.000-430.000 MHz	380.950-394.950 MHz	44.595MHz	45.05MHz	M68732L

RX Section

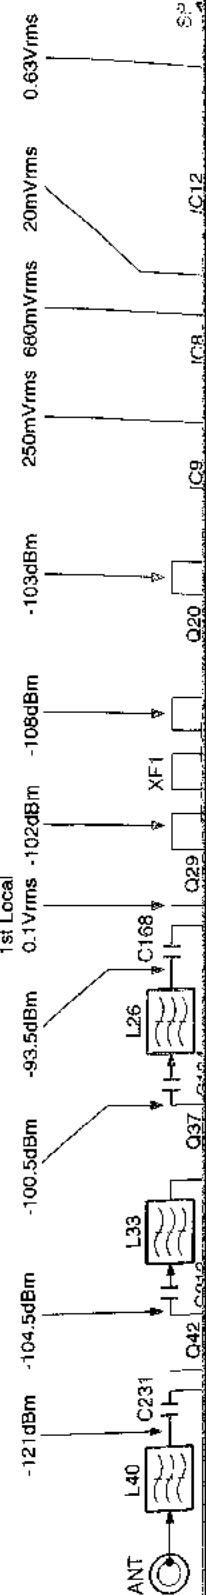

RX Section

Each of the levels, plotted from RF to the first IF is the level that can provide a 12 dB SINAD for an SSG signal through a 470pF ceramic capacitor.

The first local level is the value measured by an RF VTVM.

每一个从 RF 到第一 IF 标绘出的电平是对通过 470 pF 陶瓷电容器的 SSG 信号提供 12 dB SINAD 的电平。

[illegible]

The AF level is measured by an AF VTVM. The RF level is measured by an RF VTVM. Each of levels measured at high impedance. The transmitting frequency is 460.05MHz.

The audio generator is controlled so that the input signal at the MIC pin has a deviation of $\pm 3\text{kHz}$ for a modulation frequency of 1kHz .


AF电平利用AFVTVM测量。RF电平利用RFVTVM测量。每
一串率以高阻抗测量。

发射频率是460.05MHz。
音频发生器被制成在MIC脚处的输入信号对1kHz调制频率具备 $\pm 3\text{kHz}$ 的偏差。


TK-370/378

KNB-14/KNB-15A (Ni-Cd BATTERY)

KNB-14



CIRCUITDIAGRAM

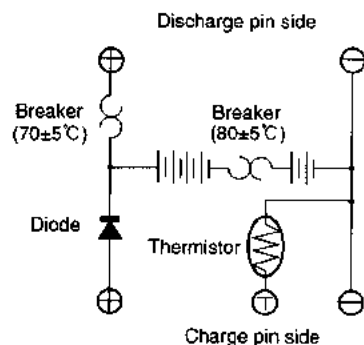

SPECIFICATIONS

Voltage : 7.2V(1.2V×6)
 Charging current : 600mAh
 Dimensions : 60.8W×110.8H×17.3D(mm)
 (projections included)
 Charger and charging time:
 KSC-15 (normal charger), approximately 8 hours
 KSC-16 (rapid charger), approximately 1 hour
 Weight : 165g


规格

电 压: 7.2V(1.2V×6)
 公称容量: 600mAh
 尺 寸: 60.8(宽)×110.8(高)×17.3(深)(mm)
 (包括凸边)
 充电器、充电时间: KSC-15(一般充电器)约8小时
 KSC-16(快速充电器)约1小时
 重 量: 165g

KNB-15A



CIRCUITDIAGRAM

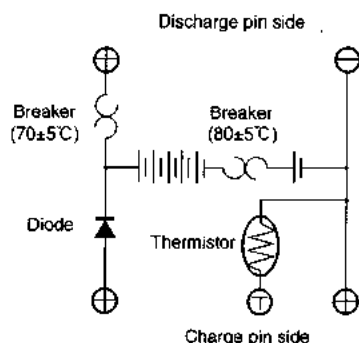

SPECIFICATIONS

Voltage : 7.2V(1.2V×6)
 Charging current : 1100mAh
 Dimensions : 60.8W×110.8H×20.3D(mm)
 (projections included)
 Charger and charging time:
 KSC-15 (normal charger), approximately 8 hours
 KSC-16 (rapid charger), approximately 1 hour
 Weight : 210g

规格

电 压: 7.2V(1.2V×6)
 公称容量: 1100mAh
 尺 寸: 60.8(宽)×110.8(高)×20.3(深)(mm)
 (包括凸边)
 充电器、充电时间: KSC-15(一般充电器)约8小时
 KSC-16(快速充电器)约2小时
 重 量: 210g

规格

一般

频率范围	TK-370: K (450~470MHz) TK-378: M (450~470MHz) TK-370: K2 (470~490MHz) TK-378: M4 (400~420MHz) TK-370: K3 (490~512MHz) TK-370: K4 (406~430MHz)
频道数	32※
频道间隔	(25) kHz (锁相环频道步进5/6.25kHz)
工作电压	7.5VDC
电池寿命	以4W, 8小时以上 (使用KNB-15A电池, 以5-5-90占空因数)
温度范围	-30°C至+60°C (-22°F至+140°F)
外形尺寸和重量	
使用KNB-14 (7.2V 600mAh电池) 时	58 (2-5/16) W × 135 (5-5/16) H × 30 (1-3/16) D mm (in) 400g (0.88lbs)
使用KNB-15A (7.2V 1100mAh电池) 时	58 (2-5/16) W × 135 (5-5/16) H × 33 (1-5/16) mm (in) 440g (0.97lbs)

※关于装备Smar Tunk II™的无线电设备, 频道1~16为传统的频道, 而频道17~32为Smar Tunk II™频道。

接收机 (根据电子工业协会标准EIA-316B测量)

灵敏度

电子工业协会标准12dB的信号对噪声和失真比 0.25μV (TK-370) / 0.18μV (TK-378)

调制可接收性 ±7kHz

选择性 -65dB

互调制 -65dB (TK-370) / -60dB (TK-378)

假信号响应 -60dB

音频功率输出 于小于10%的失真500mW

频率稳定性 ±0.0005% 从-30°C至+60°C

频道频率扩展 20MHz

发射机 (根据电子工业协会标准EIA-316B测量)

射频功率输出 4W/1W

失真和谐波 -70dB

调制 16KφF3E

最大频率偏移 ±5kHz (对于100%, 于1000Hz)

调频噪音 -45dB

音频失真 -5%

频率稳定性 ±0.0005% 从-30°C至+60°C

频道频率扩展 20MHz

注意: 使用说明书上列出的K2、K3和K4型为暂定规格。

TK-370/378

SPECIFICATIONS

GENERAL

Frequency Range	TK-370:K(450 ~ 470MHz) TK-370:K2(470 ~ 490MHz) TK-370:K3(490 ~ 512MHz) TK-370:K4(406 ~ 430MHz)	TK-378:M(450 ~ 470MHz) TK-378:M4(400 ~ 420MHz)
Number of channels.....	32※	
Channel Spacing	25kHz (PLL channel step 5/6.25kHz)	
Operating Voltage.....	7.5 VDC	
Battery Life.....	More than 8 hours at 4 watts (5-5-90 duty cycle with KNB-15A battery)	
Temperature Life	-30°C to +60°C (-22 °F to +140 °F)	
Dimensions and Weight		
With KNB-14 (7.2V 600mAh battery)	58 (2-5/16) W × 135 (5-5/16) H × 30 (1-3/16) D mm (in) 400g (0.88lbs)	
With KNB-15 (7.2V 1100mAh battery)	58 (2-5/16) W × 135 (5-5/16) H × 33 (1-5/16) D mm (in) 440g (0.97lbs)	

※On SmarTrunk II™ configured radios, channels 1 ~ 16 are conventional, and 17 ~ 32 are SmarTrunk II™ channels.

RECEIVER (Measurements made per EIA standard EIA-316B)

Sensitivity	
EIA 12dB SINAD	0.25μV (TK-370) / 0.18μV (TK-378)
Modulation Acceptance	±7kHz
Selectivity.....	65dB
Intermodulation.....	65dB (TK-370) / 60dB (TK-378)
Spurious response.....	60dB
Audio Power Output.....	500mW at less than 10% distortion
Frequency Stability	±0.0005% from -30°C to +60°C
Channel Frequency Spread.....	20MHz

TRANSMITTER (Measurements made per EIA standard EIA-316B)

RF Power output.....	4W / 1W
Spurious and Harmonics	-70dB
Modulation	16K φ F3E
Maximum frequency deviation	±5kHz (for 100% at 1000Hz)
FM Noise	-45dB
Audio Distortion	5%
Frequency Stability	±0.0005% from -30°C to +60°C
Channel Frequency Spread.....	20MHz

NOTE : The K2, K3, and K4 types described in the manual conform to the tentative specification.

KENWOOD CORPORATION

14-6, Dogenzaka 1-chome, Shibuya-ku, Tokyo 150, Japan

KENWOOD SERVICE CORPORATION

P.O. BOX 22745, 2201 East Dominguez Street, Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS LATIN AMERICA S.A.

P.O. BOX 55 2791 Piso 6 Plaza Chase Cl. 47 y Aquilino de la Guardia Panama, Republic of Panama

KENWOOD ELECTRONICS CANADA INC.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 63160 Heusenstamm, Germany

KENWOOD ELECTRONICS BENELUX N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

KENWOOD ELECTRONICS FRANCE S.A.

13, Boulevard Ney, 75018 Paris, France

KENWOOD ELECTRONICS U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB United Kingdom

KENWOOD ELECTRONICS NEDERLAND B.V.

Amsterdamseweg 35, 1422 AC Uithoorn, The Netherlands

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129 Milano, Italy

KENWOOD IBERICA S.A.

Bo'ivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

(A.C.N. 001 499 074)

P.O. Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Unit 3712-3724, Level 37, Tower one Metroplaza, 223 Hing Fong Road, Kwai Fong, N.T., Hong Kong