

**TESTING CORD ASSEMBLIES**  
**4-CONDUCTOR CORDS**  
**4W1A THROUGH 4W12A**  
**DESCRIPTION**

**1. GENERAL**

**1.01** This section lists and illustrates the 4W1A through 4W12A 4-conductor cords.

**1.02** This section is reissued to:

- Update the format
- Rate the 4W5A cord Mfr Disc.

Revision arrows have been used to indicate the changes. The Equipment Test List is not affected.

**1.03** For general information on these cords, refer to Section 032-314-100.

**2. DESCRIPTION OF CORDS**

**4W1A—MFR DISC.**

No replacement.

**4W1B—MFR DISC.**

No replacement.

**4W1C—MFR DISC.**

No replacement.

**4W1D—MFR DISC.**


No replacement.

**4W2A—MFR DISC.**

No replacement.

**4W3A**

1 W4BW cord, 6 feet long, equipped with:  
1 464C plug  
1 251B plug  
1 251C plug  
1 251D plug  
1 251E plug

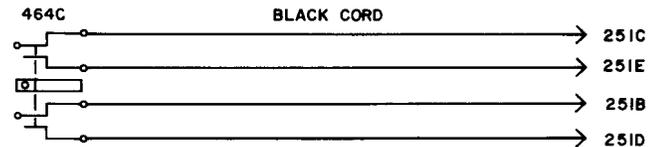


Res 0.21  $\Omega$ /ft

**4W4A**

1 W4CA cord, 6 feet long, equipped with:  
1 464C plug

4 KS-6780 connecting clips (with four 108 cord tips, rubber insulators)

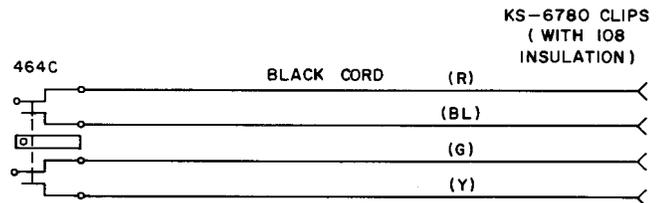

Res 0.21  $\Omega$ /ft

**4W5A—MFR DISC.**

No replacement.

**NOTICE**


Not for use or disclosure outside the Bell System except under written agreement

**SECTION 032-314-121**

**4W6A**

1 W4CC cord, 12 feet long, equipped with:

- 1 464C plug
- 1 252A plug
- 1 252B plug

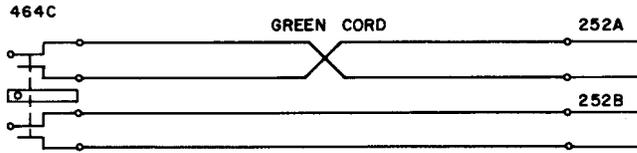


Res 0.21  $\Omega$ /ft

**4W7A**

1 W4CD cord, 12 feet long, equipped with:

- 1 464A plug
- 1 301A plug

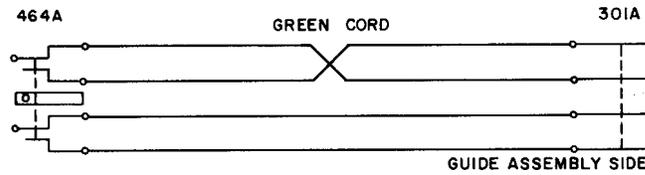

Res 0.21  $\Omega$ /ft

**4W8A—MFR DISC.**

Replaced by the W4BT cord.


**4W9A—MFR DISC.**

No replacement.

**4W10A**

1 W4AY cord, 8 feet long, equipped with:

- 1 240A plug
- 1 471A jack

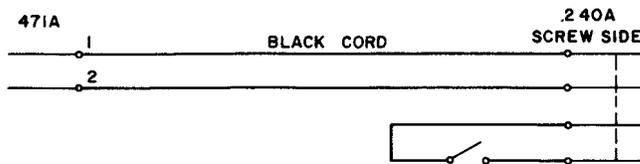


Res 0.16  $\Omega$ /ft

**4W11A**

1 W4CC cord, 12 feet long, equipped with:

- 1 464C plug
- 1 412B plug
- 1 412A plug

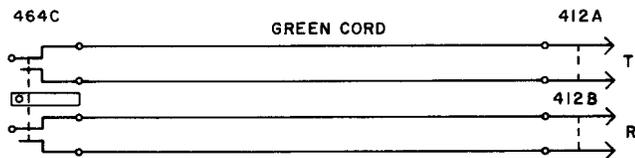


Res 0.16  $\Omega$ /ft

The 4W11A cord was initially intended for use at distributing frames for connecting such circuits as plugging-up and test trunk circuits to circuits terminated on 300-type connectors.

**4W12A**

1 W4CF cord, 6 feet long, equipped with:

- 1 464C plug
- 1 413A plug
- 1 413B plug
- 1 413C plug
- 1 413D plug
- 1 360B tool
- 1 360C tool
- 1 141 cord tip

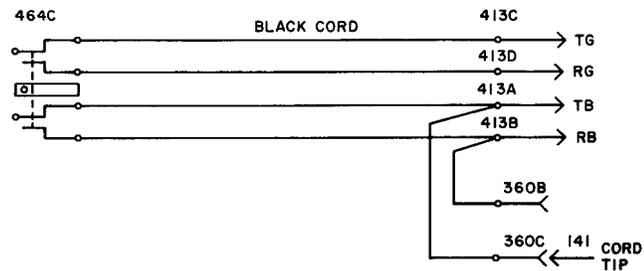

Res 0.16  $\Omega$ /ft

The 4W12A cord was initially intended for use at distributing frames for connecting Varley test trunks to conductors terminated on 300-type connectors.