

**RECREATIONAL VEHICLE WIRING**  
**NONPERMANENT-TYPE**  
**(TRAILERS, CAMPERS, TRUCK CAMPERS, MOTOR HOMES AND BOATS)**

**1. GENERAL**

**1.001** This addendum supplements Section 461-220-101, Issue 1. Place this pink sheet ahead of page 1 of the section.

**1.002** This addendum is issued for the following reasons:

- (a) To add information on the C weatherproof cord, and
- (b) To clarify the location of the station protector at marina installations.

**2. CHANGES TO SECTION**

**2.001** On page 1, under **ORDERING GUIDE**, add:

- Cord, Weatherproof, C (used with RV and boats, Fig. 5.1).

**2.002** On page 3, following paragraph 2.05, add the following paragraph:

**2.05.1** The C weatherproof cord is the same as the B weatherproof cord except that the female plug on the recreational vehicle or boat end is replaced with space-tipped leads for terminating

the cord directly in a 500- or 2500-type telephone set. An "S" hook assembly is provided for fastening the cord by means of the ringer mounting screw. Terminate the leads as follows: (BK) for tip, (W) for ring, and (G) for ground.

**2.003** On page 10, revise paragraph 3.11 to read as follows:

**3.11** Jacks on docks should be mounted on posts or in wells provided by the marina owner. To prevent damage, do not mount the jack on the water or walkway side. Usually the post or pedestal will be the same one on which power is mounted. No station protector or bonding is to be placed on the boat. Mount the protector at the last permanent terminal or housing (which will usually be ashore) so that an adequate ground may be obtained. Refer to the sections on station protection and grounding in Division 460. Where individual protectors are required, use the 123- or 128-type with the 305A mounting (or equivalent). **Provide a ringer simulator or equivalent at the dock jack if required.**

**2.004** On the bottom of page 1, delete the copyright notice and add the following: Not for use or disclosure outside the Bell System except under written agreement.

**NOTICE**

Not for use or disclosure outside the  
Bell System except under written agreement

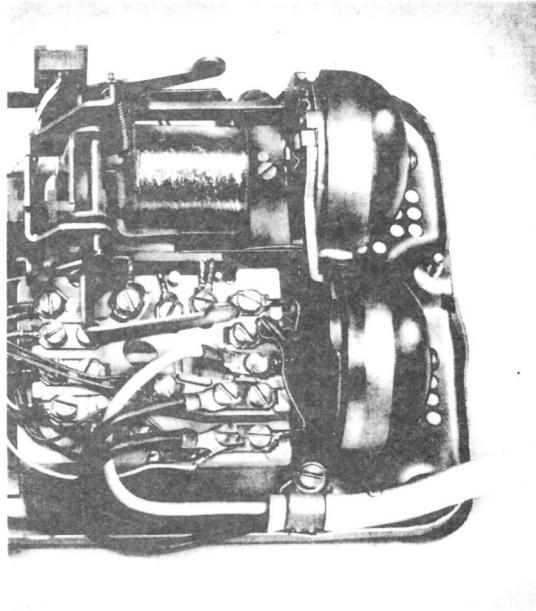


Fig. 5.1—Securing C Weatherproof Cord in Telephone Set