

CS2881CG113 TELEPHONE SET

IDENTIFICATION, CONNECTIONS, AND MAINTENANCE

1. GENERAL

1.01 This section contains information on the CS2881CG113 (Fig. 1) DESIGN LINE* decorator telephone (WINNIE-THE-POOH Phone†).



Fig. 1—CS2881CG113 DESIGN LINE Decorator Telephone

*Trademark of American Telephone and Telegraph Company.

†©1964 Walt Disney Productions, Housing produced by American Telecommunications Corporation.

1.02 Whenever this section is reissued, the reasons for reissue will be listed in this paragraph.

1.03 Telephone sets having the prefix "CS" (CS2881CG113) to the set code do not include telephone company-owned components. They are available for sale to the customer in their entirety (the housing as well as the transmission and signaling components).

2. IDENTIFICATION

2.01 The CS2881CG113 TOUCH-TONE* telephone dial equipped telephone set is a DESIGN LINE decorator telephone that is available to the customer.

2.02 Refer to Table A for component parts.

3. CONNECTIONS

3.01 These telephone sets are intended to be used as single line sets for bridged service only and are not for use on multiparty service.

3.02 Refer to Fig. 2 for connection information.


4. MAINTENANCE

4.01 No adjustments or wiring changes are to be performed on these sets on the customer's premises.

4.02 When it is desired to return a set to Western Electric for repair, it should be packed using an appropriate protective packing material.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

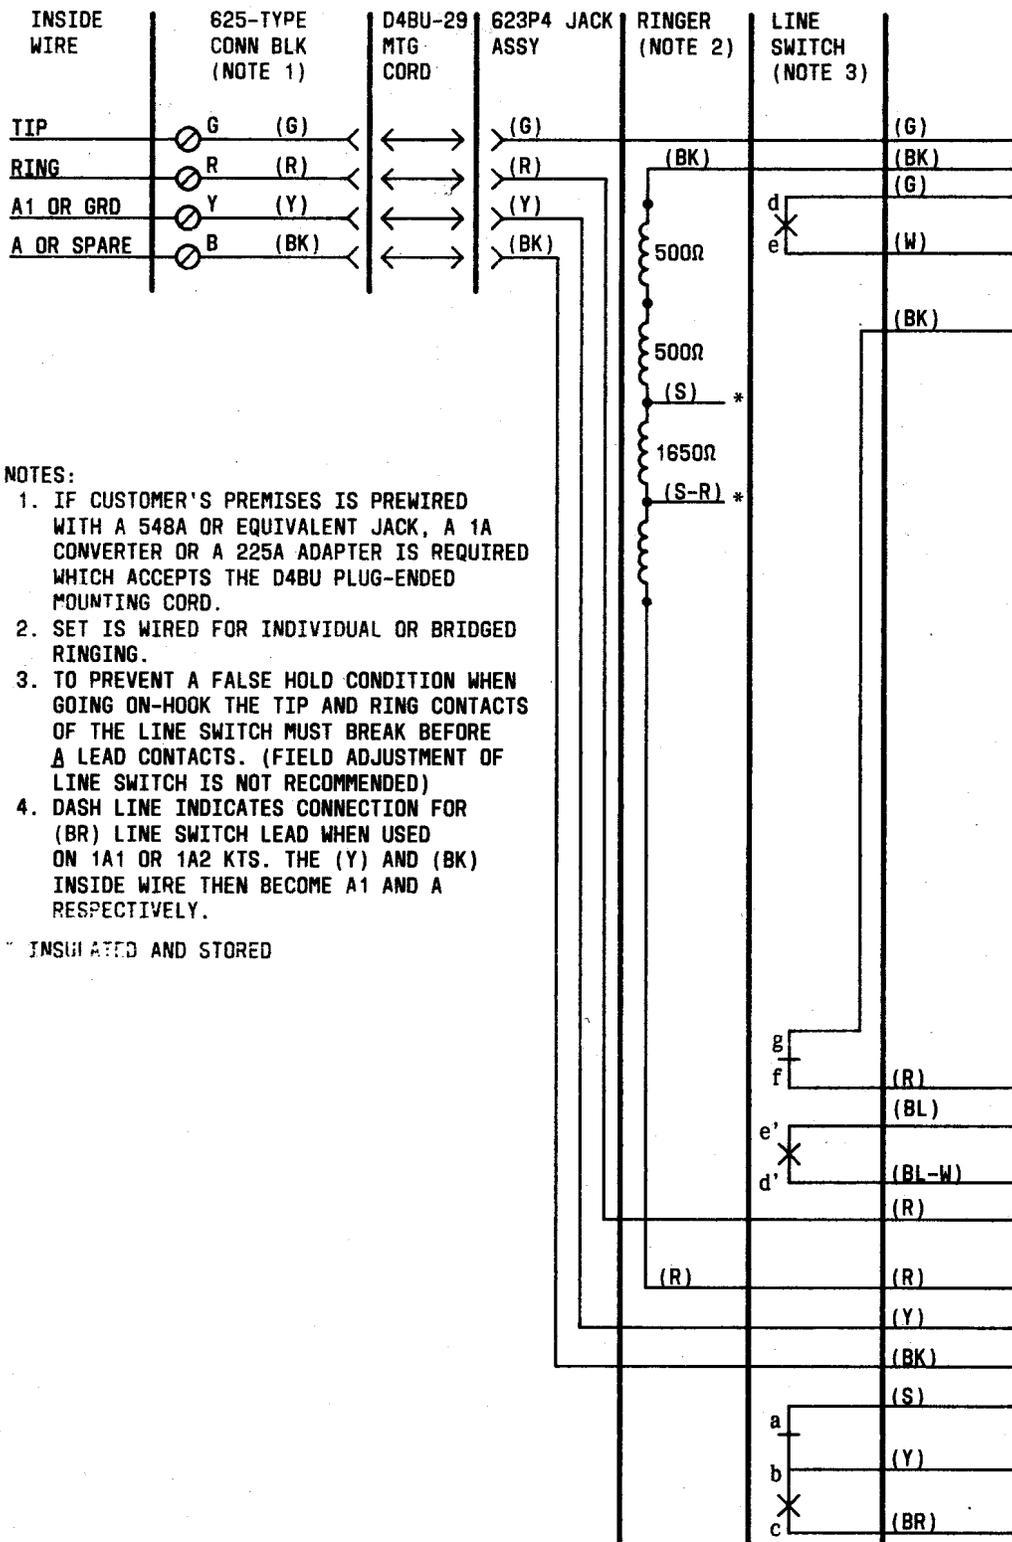

- NOTES:
1. IF CUSTOMER'S PREMISES IS PREWIRED WITH A 548A OR EQUIVALENT JACK, A 1A CONVERTER OR A 225A ADAPTER IS REQUIRED WHICH ACCEPTS THE D4BU PLUG-ENDED MOUNTING CORD.
 2. SET IS WIRED FOR INDIVIDUAL OR BRIDGED RINGING.
 3. TO PREVENT A FALSE HOLD CONDITION WHEN GOING ON-HOOK THE TIP AND RING CONTACTS OF THE LINE SWITCH MUST BREAK BEFORE A LEAD CONTACTS. (FIELD ADJUSTMENT OF LINE SWITCH IS NOT RECOMMENDED)
 4. DASH LINE INDICATES CONNECTION FOR (BR) LINE SWITCH LEAD WHEN USED ON 1A1 OR 1A2 KTS. THE (Y) AND (BK) INSIDE WIRE THEN BECOME A1 AND A RESPECTIVELY.

* INSULATED AND STORED

Fig. 2—CS2881CG113 Telephone Set, Connections (Equipped With 72D3A Dial)
(Sheet 1 of 2)

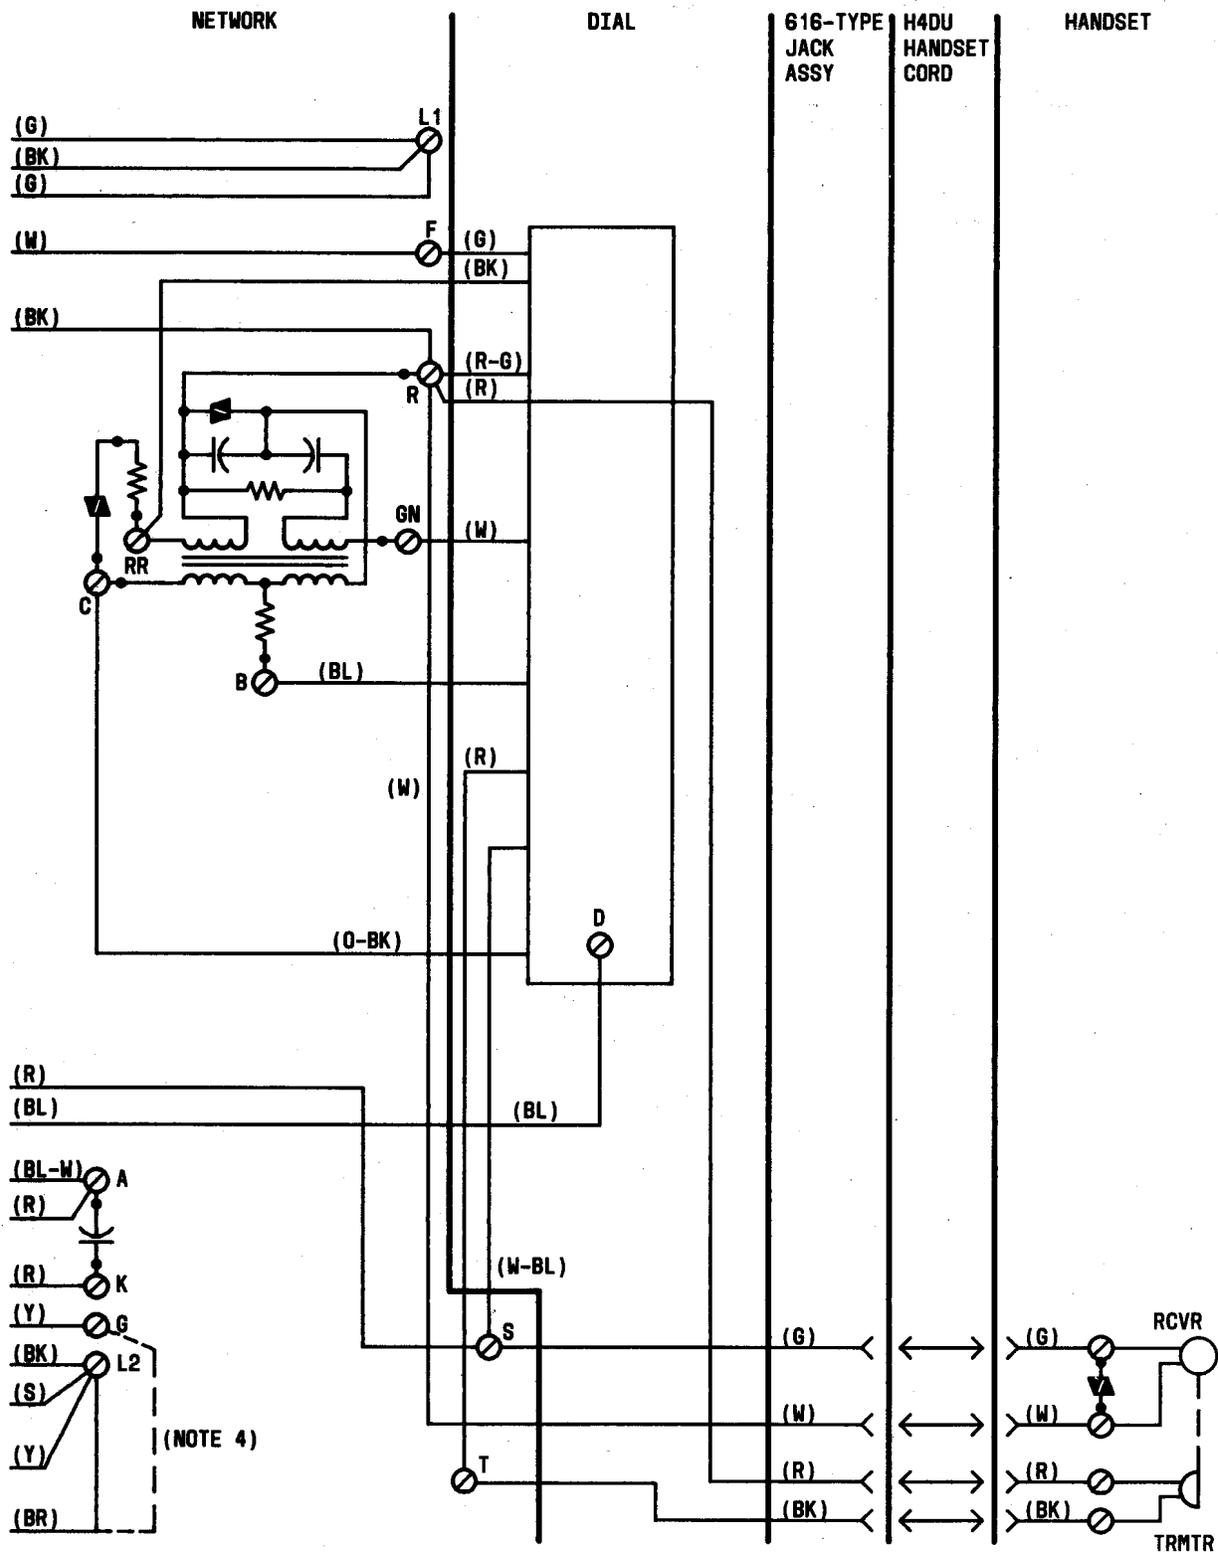


Fig. 2—CS2881CG113 Telephone Set, Connections (Equipped With 72D3A Dial)
(Sheet 2 of 2)

→ TABLE A ←

COMPONENT PARTS

DIAL	TRMTR UNIT	RCVR UNIT	HANDSET CORD JACK	MTG CORD JACK	HANDSET CORD	MTG CORD	HANDSET	RINGER	NET.
72D3A	T1	U3 or U5	616P	623P4	H4DU-104	D4BU-29	G15CS-104	P3A	4228B