

COIN COLLECTORS - 200 TYPE
INSTALLATION OF B-699456 PENNY SHIELD

1. GENERAL

1.01 This Section is issued to cover the installation of the B-699456 Penny Shield on 200 Type Coin Collector Chutes where penny usage is a problem.

1.02 The use of the B-699456 Penny Shield prevents the insertion of paper strips into the 10 cent coin chute which effectively blocks rejection of pennies placed in the 5 cent coin chute.

2. DESCRIPTION

2.01 The B-699456 Penny Shield is a physical metal guard about 1/2" by 1-1/4" which, when placed on a 200 type coin collector chute, is effective in preventing use of a paper strip and a penny to place calls.

2.02 Figure 1 is an illustration of the B-699456 Penny Shield in place.

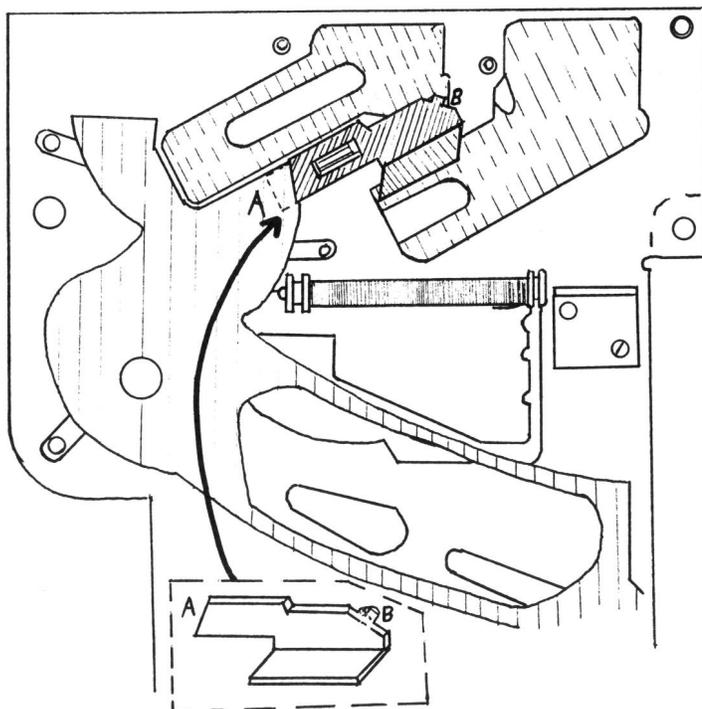


Fig. 1

Figure 2 points out the location of the Penny Shield on the coin chute.

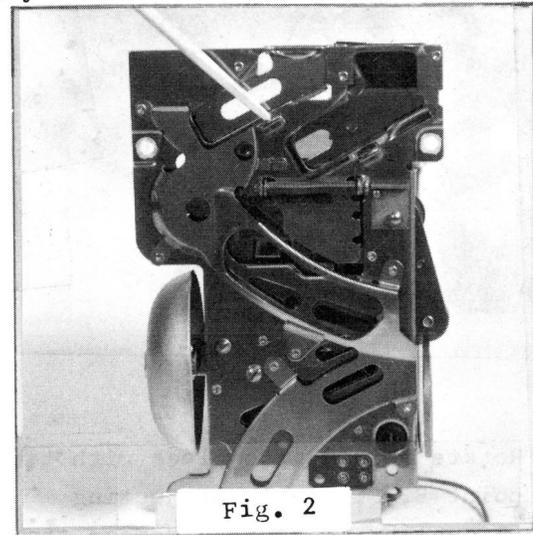


Fig. 2

3. INSTALLATION OF THE PENNY SHIELD

3.01 To install the shield, remove the coin chute from the coin collector upper housing. Install the Penny Shield in the following manner:

- (a) Lift the quarter channel about 1/16 of an inch by wedging an orange stick under the channel as shown in Figure 3. Use an orange stick to prevent damage to the channel.

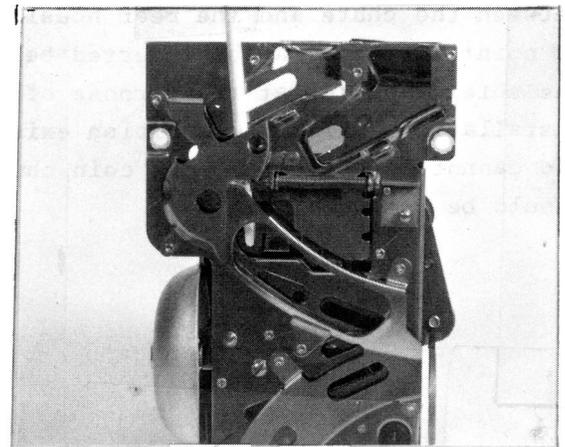


Fig. 3

(b) Insert point A of shield, Figure 1, under the quarter channel. See Figure 4.

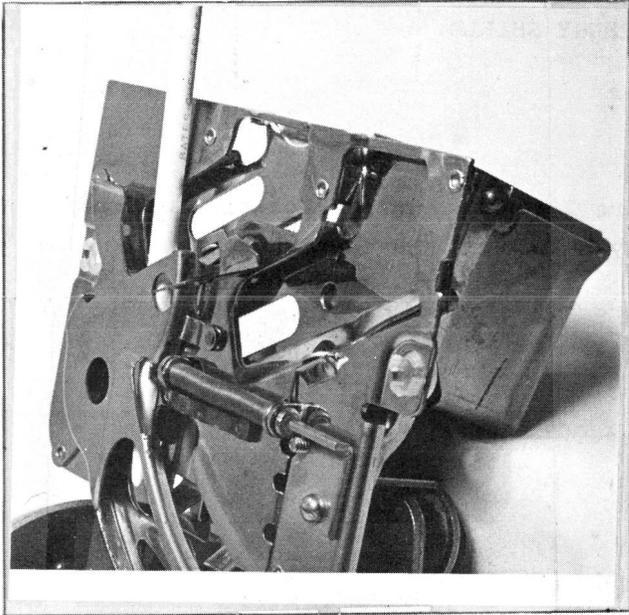


Fig. 4

(c) Rotate shield into place with tab, point B, Figure 1, projecting through opening in chute. Remove the orange stick from under the quarter slot. Press tab, point B, firmly down over lip of chute with a screwdriver.

(d) Turn the chute over and tighten the tab against the chute by pressing firmly with the tip of a screwdriver.

Do not use excessive force. Inspect the chute carefully, paying particular attention to the portion of the chute over which the tab at point B, Figure 1, is clamped. If there is an air gap between the chute and the rear housing at point B, paper may be inserted behind the shield and defeat the purpose of the installation. If this condition exists and cannot be corrected, the coin chute should be replaced.

3.02 The shield is now installed as shown in Figure 5.

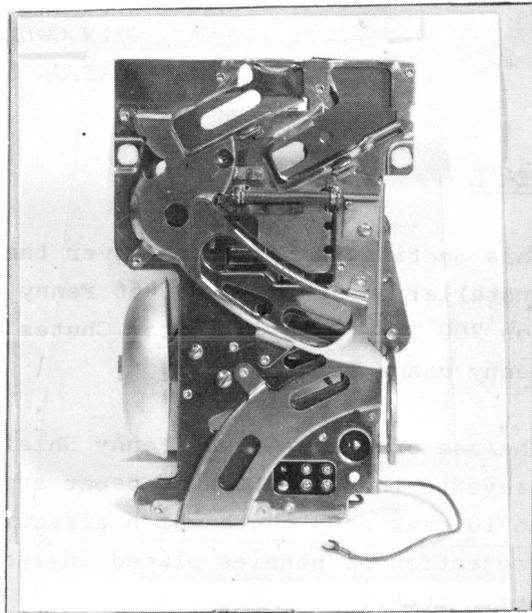


Fig. 5

3.03 Replace the coin chute in the upper housing, connect all wiring and test the coin collector for proper operation.

4. ORDERING INFORMATION

4.01 The B-699456 Penny Shield may be ordered from Western Electric on a standard supplies requisition. Order as follows:

(Quantity) B-699456 Coin Chute Guard, to be obtained from:

Aircom Metal Products, Inc.
6205 East 30th Street
P.O. Box 18054
Indianapolis, Indiana 46218