

CUSTOMER LINE CARDS

1. GENERAL

1.001 This addendum supplements Section 660-151-010, Issue 2.

1.002 This addendum is issued to describe revised Forms E-2887 and E-1122, on teletypewriter single station equipment. The revised forms provide a record of additional items required for the testing and maintenance of dial TWX service. These forms may also be used for other data services.

2. DESCRIPTION OF CARDS

The following change applies to Part 2 of the section:

- (a) 2.03 — revised to show changes in titles of Forms E-2887 and E-1122

TITLE	FORM NO. 3 1/2" CARD	FORM NO. 4 3/4" CARD	OVER-ALL COLOR	TAB POSITIONS
Teletypewriter & Data Service	E-2887	E-1122	White	1 only

3. SELECTION OF CARDS

The following change applies to Part 3 of the section:

- (a) 3.12 — revised

3.12 Teletypewriter and Data Service, Forms E-2887 and E-1122 — For dial teletypewriter and data services (Fig. 18).

4. DESCRIPTION OF ENTRIES

The following changes apply to Part 4 of the section:

- (a) 4.04.1 — added
(b) 4.11.1 — added
(c) 4.17.1 — added
(d) 4.18.1 — added
(e) 4.18.2 — added
(f) 4.40.1 — added

- (g) 4.49.1 — added
(h) 4.49.2 — added
(i) 4.62.1 — added
(j) 4.63 — revised
(k) 4.66.1 — added
(l) 4.66.2 — added
(m) 4.70.1 — added

4.04.1 **AUX. LINE EQPT.** — Enter the type and identity number of the loop auxiliary equipment.

4.11.1 **CARD** — Enter the serial number indicating the issue of the card. The first card prepared for a given telephone circuit number shall be numbered "1." If this card is replaced for any reason, the second should be numbered "2," etc.

4.17.1 CONCENTRATOR

- Conc. No. — Enter the number of the concentrator used.
L.T. — Enter the concentrator line terminal number.
Type — Enter the type of concentrator used.
C.U. Loc. — Enter the office where the control unit is located.
R.U. Loc. — Enter the location of the remote unit.

4.18.1 **D.A.L.C.** — Enter the number of the Divided Access Line Circuit.

4.18.2 **DATE INST.** — Enter the installation date of the TWX or Data service.

4.40.1 LOOP DESIGN

- EML. — Enter the expected measured loss at 1000 cycles and 2300 cycles.
Tol. — Enter the permissible tolerance \pm **DB.**

Ret. Loss — Enter the return loss at 1000 cycles and 2300 cycles.

D.C. Res. — Enter the D.C. resistance.

Hybrid Strap — Enter an X mark to show whether or not a hybrid strap is required.

Desens. Pad — Enter the desensitizing pad strapping A to ____.

F1 Pad Value — Enter the F1 pad value in DB.

F2 Pad Value — Enter the F2 pad value in DB.

4.49.1 ORIG. LINE EQPT. — Enter the panel and jack or dial equivalent.

4.49.2 ORIG. TEL. NO. — Where a divided access line circuit is used, enter the telephone number associated with the originating equipment.

4.62.1 REPEATER-CARRIER — S. F. UNIT

Location — Enter the location of the repeater, carrier or S.F. unit.

Type — Enter the type of repeater, carrier or S.F. unit.

No. — Enter the number of the repeater, carrier or S.F. unit.

Gain — Enter the gain of the repeater.

4.63 ROUTE OR BLOCK (RTE. or BLK.) —

Enter the number of the route or block in which the line or station is located (Fig. 1 and Fig. 18).

4.66.1 S.O. NO. — Enter the number of the service order covering the installation of TWX or Data service.

4.66.2 SPECIAL FEATURES — Enter the code number or type of special features associated with the teletypewriter.

4.70.1 STATION EQUIPMENT

Subset — Enter the type of instrument installed or code number of subset.

Speed — Enter the speed (words per minute) of the teletypewriter.


Att. — Unatt. — Enter an X mark in box if teletypewriter is attended or unattended.

PRINTED IN U.S.A.

FILE NO. 203-354-9347		LOOP OR STA. NO.	SERVICE TWX	CARD 1
NAME ADCO SYSTEM INC.				
ADDRESS 25 FRONT ST.				
CONTROL OFC. BPT	ORIG. TEL. NO. MA 4-9256	REF. TEL. NO. CL 9-7952	DATE INST. 10-10-61	S.O. NO. I 4651
ORIG. LINE EQPT. 20-02	D.A.L.C. 53	AUX. LINE EQPT. 1615A IND #15 837A NET #2	T.Z.	RTE. OR BLK. 2
STATION EQUIPMENT				
TYPE EQUIPMENT 28 KSR		SPECIAL FEATURES FORM FEED OUT TABS		
SUBSET 689A	SPEED 60	ATT. X	UNATT.	STA. ASSEMBLY CODE M-4660
CONCENTRATOR				
CONC. NO. 2	L.T. 03	TYPE 1A	C.U. LOC. NEW HAVEN	R.U. LOC. BPT
REPEATER - CARRIER - S.F. UNIT				
LOCATION FAIRFIELD	TYPE E6	NO. 16	CHANNEL	GAIN 60
LOOP DESIGN				
1000 CYCLE		2300 CYCLE		
EML 4.5	TOL. ± 2 DB	RET. LOSS 60 DB	EML 6.5	TOL. ± 2 DB
HYBRID STRAP		DENSENS. PAD	F1 PAD VALUE 10	D.C. RES. 670^Ω
REQD.	NOT REQD. X	A TO B	F2 PAD VALUE 4	
CABLE	PAIR	B.P.	TERMINAL	
17	51		POLE 746 WEST RD.	
1701	641	1	POLE 16 FR. 23 FRONT ST.	
187	5		BPT To FAIRFIELD	
MISC.				

BSP F38.001 TELETYPEWRITER & DATA SERVICE FORM E-2887-1 (7-61)

Front

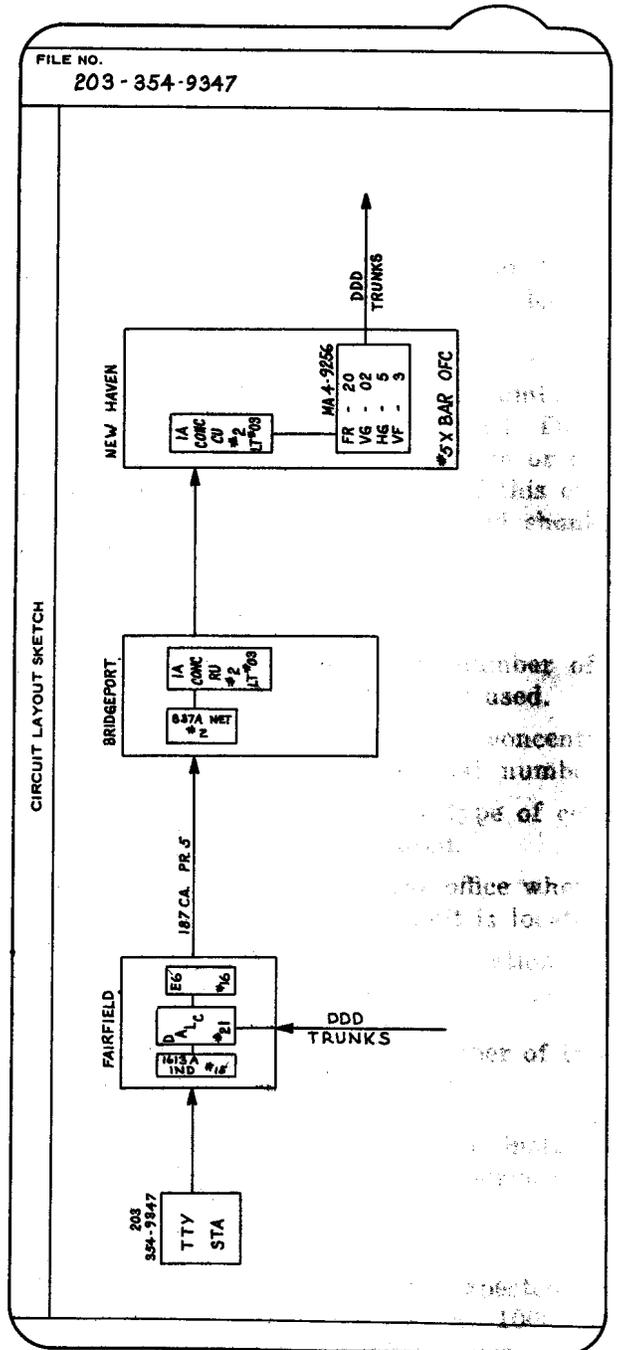

Back

Fig. 18 - Teletypewriter & Data Service Card — Used to Record the Data of Teletypewriter and Data Service