

NONCODED TOOLS

RESPIRATORS, RESTORERS, RESTS, RODS, SAWS,
 SCISSORS, SCRAPERS AND SCRUBBERS

RESPIRATOR, MINE SAFETY APPLIANCES CO.
 NO. CR-8393



Replaced by Clear-vue Model Dustfoe Re-
 spirator No. CM-46161.

RESPIRATOR, CLEAR-VUE, MODEL DUSTFOE, DUST-
 AND MIST-TYPE, MINE SAFETY APPLIANCES CO.
 CM-46161.

Filters, No. CM-41553 (Supplied in packages
 of 50).

Replaced by Respirator, Mine Safety Appli-
 cances Co. CM-76869 (Dustfoe No. 66)

RESPIRATOR, MINE SAFETY APPLIANCES CO.
 CM-76869 (DUSTFOE NO. 66)

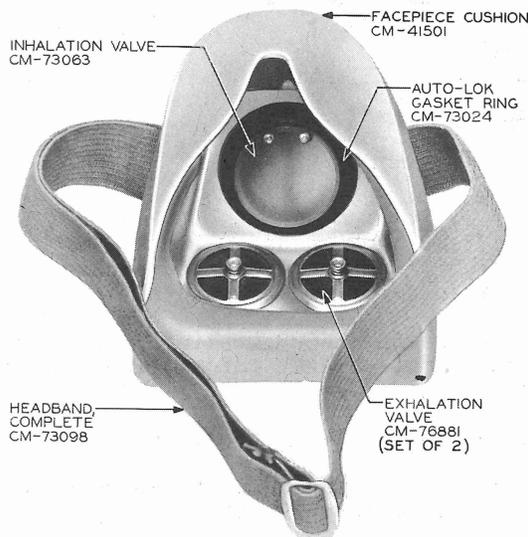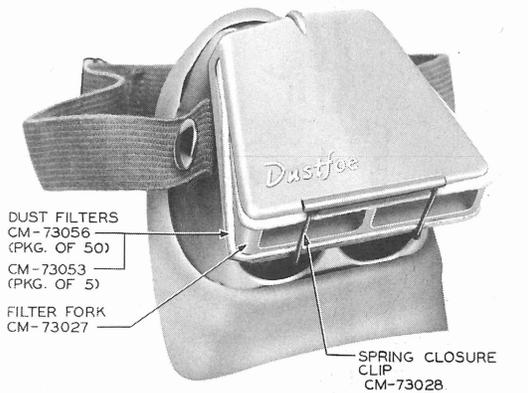


Replaces the Clear-vue respirator, Model
 Dustfoe, Dust- and Mist-type, Mine Safety
 Appliances Co. No. CM-46161.

Facelets (not illustrated), No. CM-15484
 (Supplied in packages of 25).

For general use.

REST, COPPER, SOLDERING, KS-8526

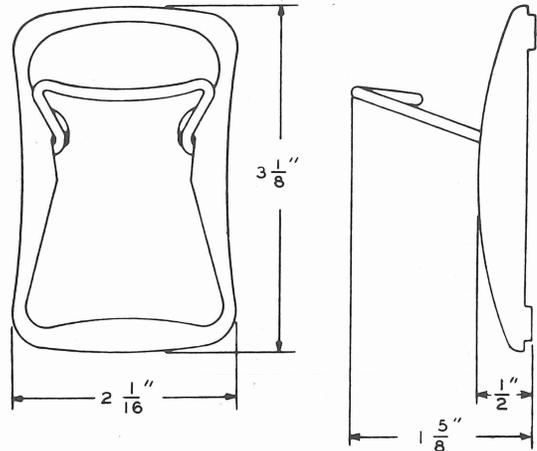


Folding soldering copper rest.

For use in supporting KS-8740 soldering
 coppers for PBX installations only. Use
 of this tool with the KS-14440 soldering
 copper is optional when the No. 504A tool
 is not provided.

RESTORER, SURFACE, FRICTION, R-2130
 Replaced by the No. 378A tool.

ROD, TORQUE, KS-14322

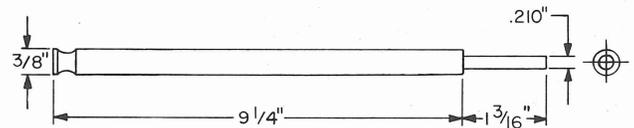

For use in checking the tension of the
 clutch idler spring on the KS-13834 per-
 forator.

SAW, HACK, BLADES

See: Blades, Hack Saw


SAW, HACK, FRAME

See: Frame, Hack Saw

→ B SPLICERS SCISSORS, ELECTRICIANS SCISSORS AND R-1682 SCISSORS

Replaced by Scissors (B, C, and D)

→ SCISSORS, (B, C, AND D)
(In ordering, specify the scissors desired.)

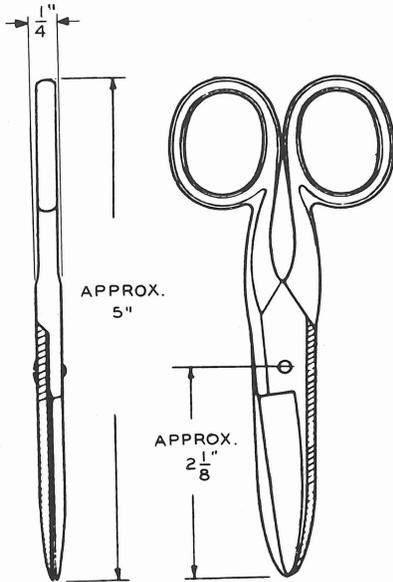

The B & C scissors are alike except that the C scissors have thicker blades and the back of one blade is provided with 2 notches for stripping plastic insulated conductors.

The D scissors are provided with stripping tips at the ends of both blades and a notch on one blade for stripping the larger conductors.


Replaces the B Splicer's Scissors, Electricians Scissors and R-1682 Scissors.

For general use.
(Spec. AT-7987)

SCRAPER, LEAD, R-1417

Replaced by B Shave Hook.

- SCRUBBER, KS-16914 L1
- SCRUBBER, KS-16915 L1

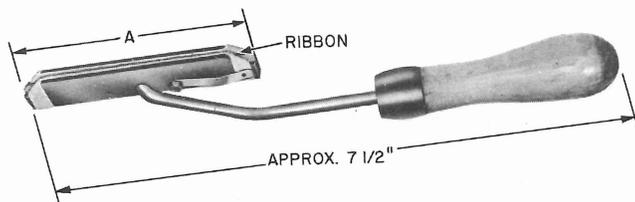


Scrubbers	"A"	Associated Ribbon	Ribbon	
			Length	Package
KS-16914 L1	4-1/2"	KS-16928 L1	12"	50
KS-16915 L1	3"	KS-16928 L2	9"	50

The KS-16928 L1 and L2 Ribbons used with this tool must be ordered separately.

KS-16914 L1 is used in cleaning sleeve terminals of the panel selector banks.
KS-16915 L1 is used in cleaning sleeve and hunt terminals of panel line finder banks.

SCRUBBER, CAM, KS-14654, List 1

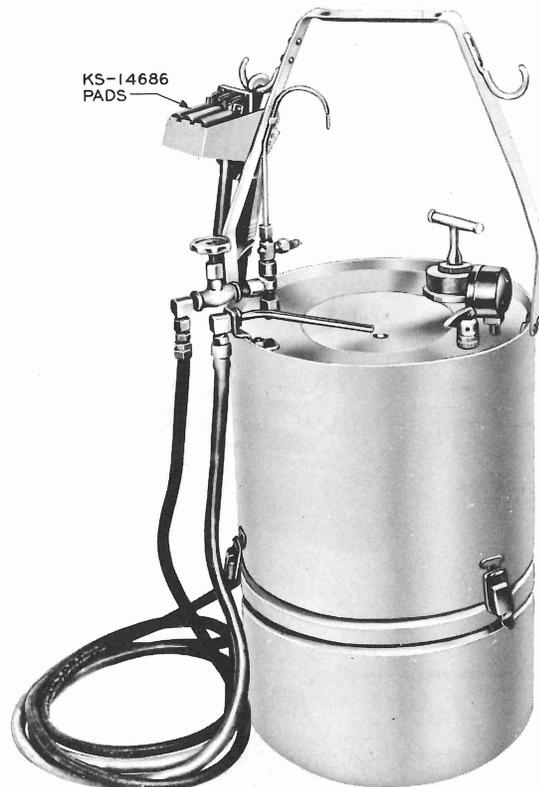

Mounts 3 KS-14686 pads, which are arranged to scrub 6 cam sides simultaneously. The pads must be ordered separately.

Refer to Section A503.624 for piece part data and maintenance information for this tool.

Replaces the No. 435A tool.

For use in cleaning cams of sequence switches and 157-type interrupters.