




ASUS X553SA-BHCLN10 Keyboard Replacement

This guide describes specific steps required to replace the keyboard on the Asus X553SA-BHCLN10

Written By: Spencer Lee

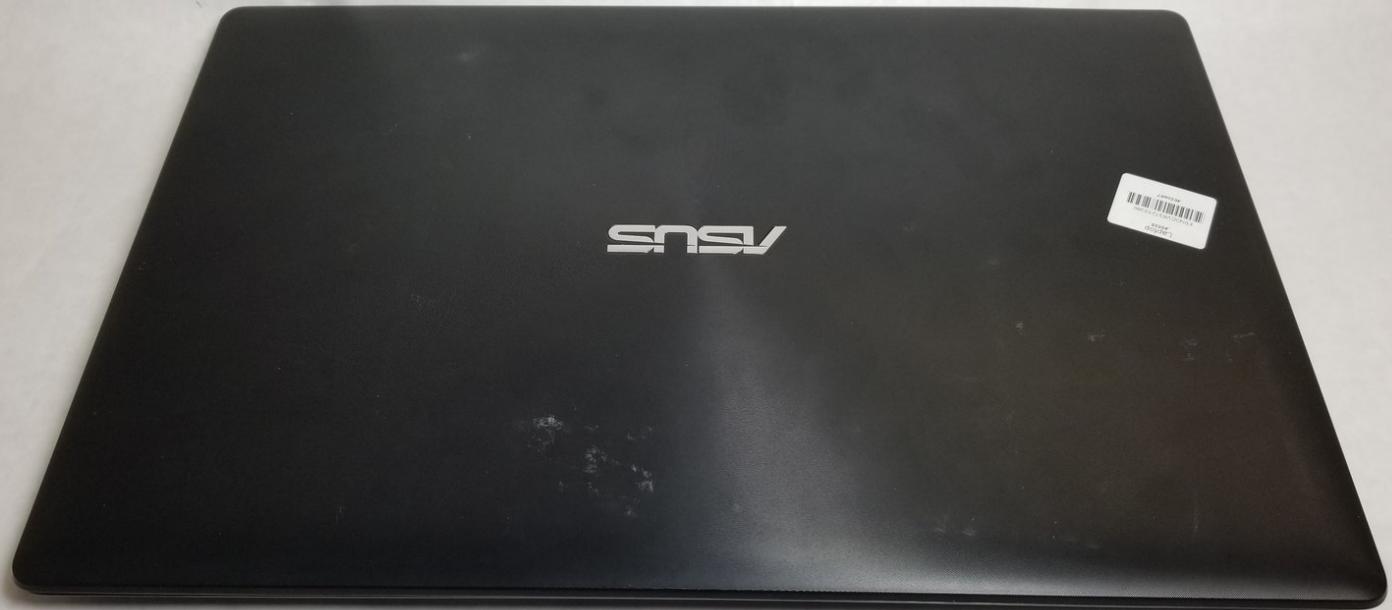

INTRODUCTION

In this guide we will be going through the process of replacing the keyboard. Be sure to keep track of screws by placing them in a cup or bowl while working on the laptop!

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Keyboard



- Power off laptop.
- Flip over the laptop so the model stickers are pointing towards the ceiling.

Step 2




- Use a Phillips #0 screwdriver to remove the six 10.5mm screws (shown in red).
- Use a Phillips #0 screwdriver to remove the four 5.5mm screws (shown in orange).

Step 3



- Turn over the laptop with the keyboard facing upwards.
- Insert a plastic opening tool under the edge of the laptop.

Step 4

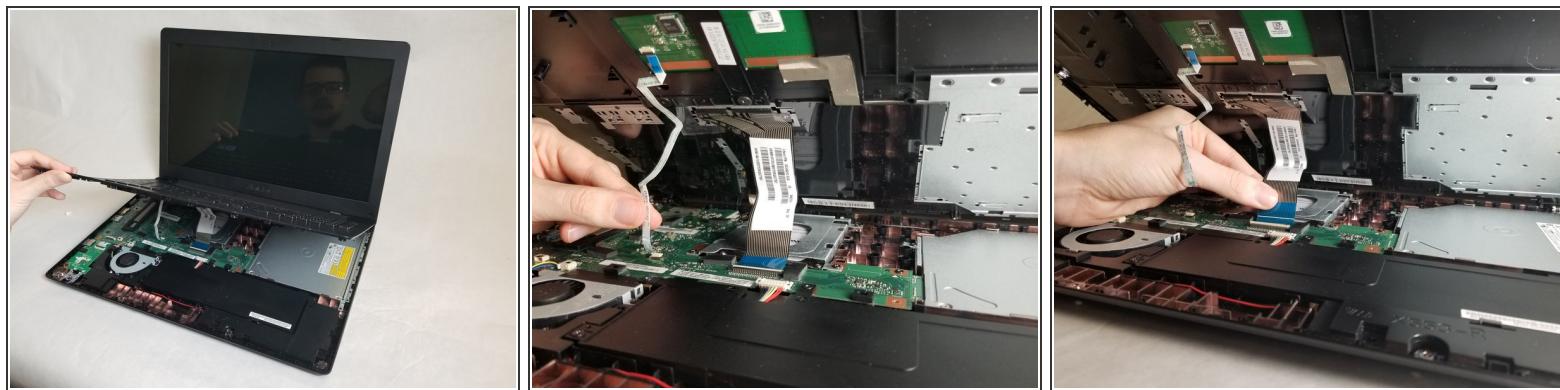

- After prying open all sides of the laptop, carefully remove the keyboard from the laptop.
- Carefully remove the two cables connecting the keyboard to the laptop by popping up the white clips and sliding the connector out.

To reassemble your device, follow these instructions in reverse order.