




# Asus Transformer T100 Battery Replacement

Replace the battery in your Asus Transformer T100.

Written By: Taylor Pantiga

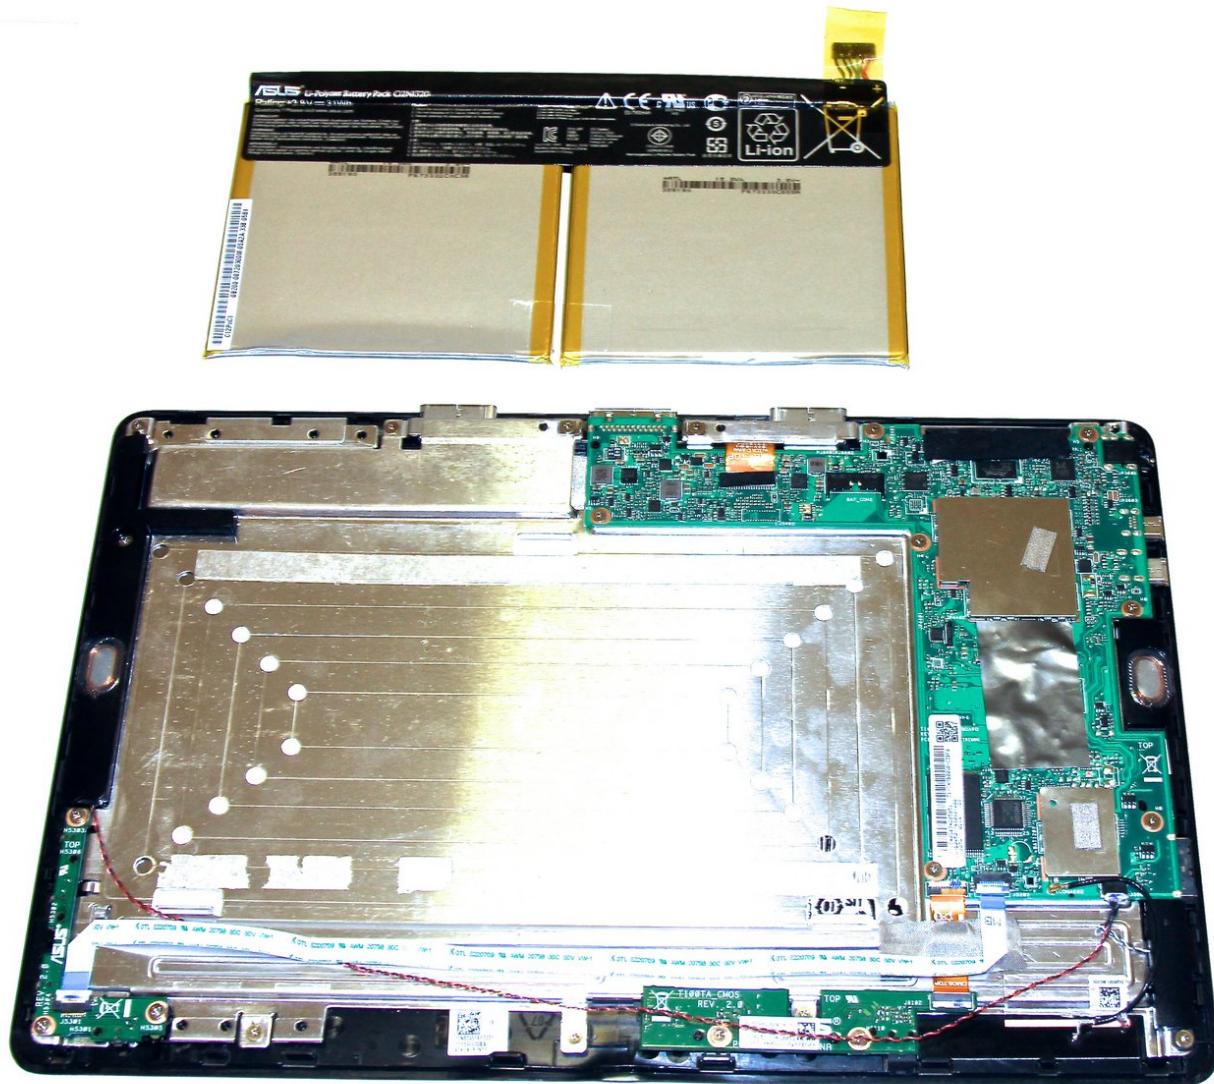

## INTRODUCTION

The battery is located inside the tablet part of the device. The plastic backing must be removed before the battery can be accessed.

### TOOLS:


- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)

## Step 1 — Rear Cover



- Separate the tablet from the base by pressing the large silver button below the tablet. The silver button is located at the base of the tablet.
- Remove the tablet by lifting up.

## Step 2

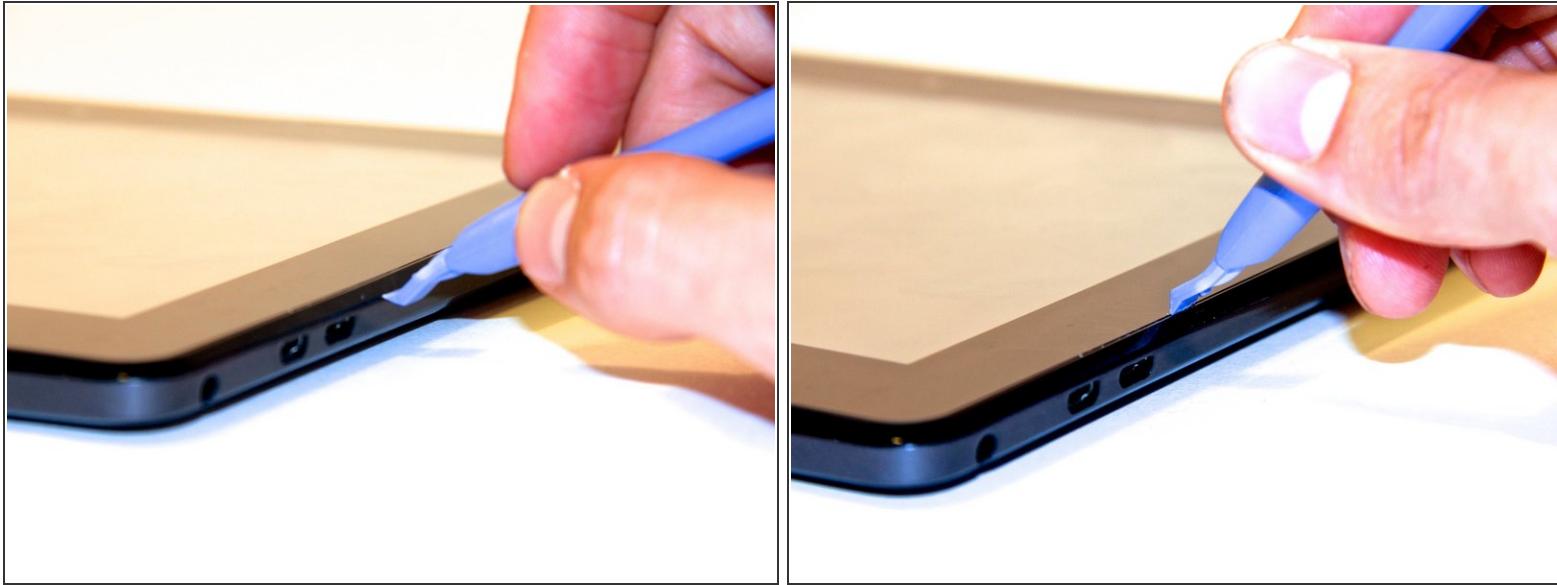

- Insert the opening tool into the seam of the tablet casing and gently pry upwards.
- With a little force, you will feel the clips release.

## Step 3



- Slide the tool along all four edges of the tablet, making sure that all the clips are released.


 Do not break these clips; otherwise, the screen will become less secure.

## Step 4




- Remove the rear casing.

## Step 5 — Battery

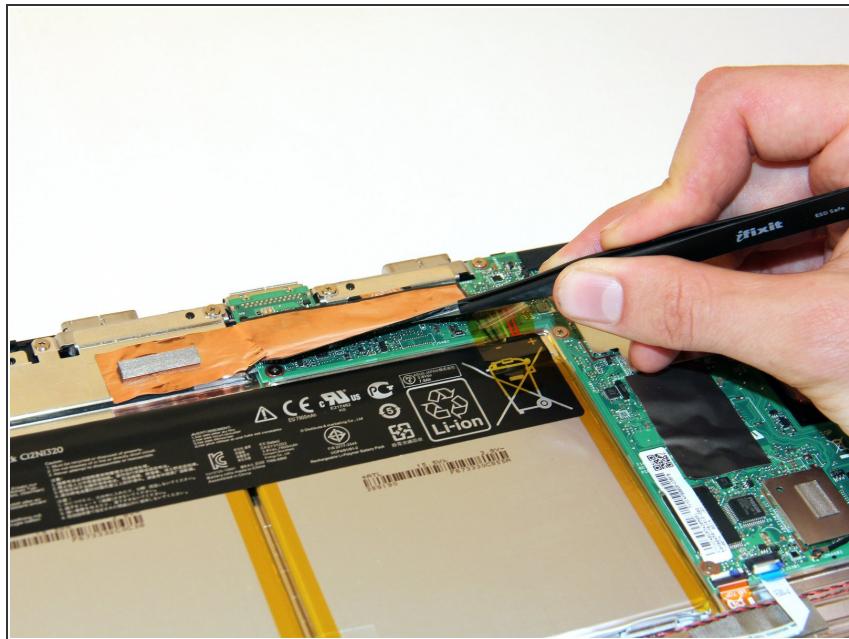

- Remove the copper tape carefully.

## Step 6

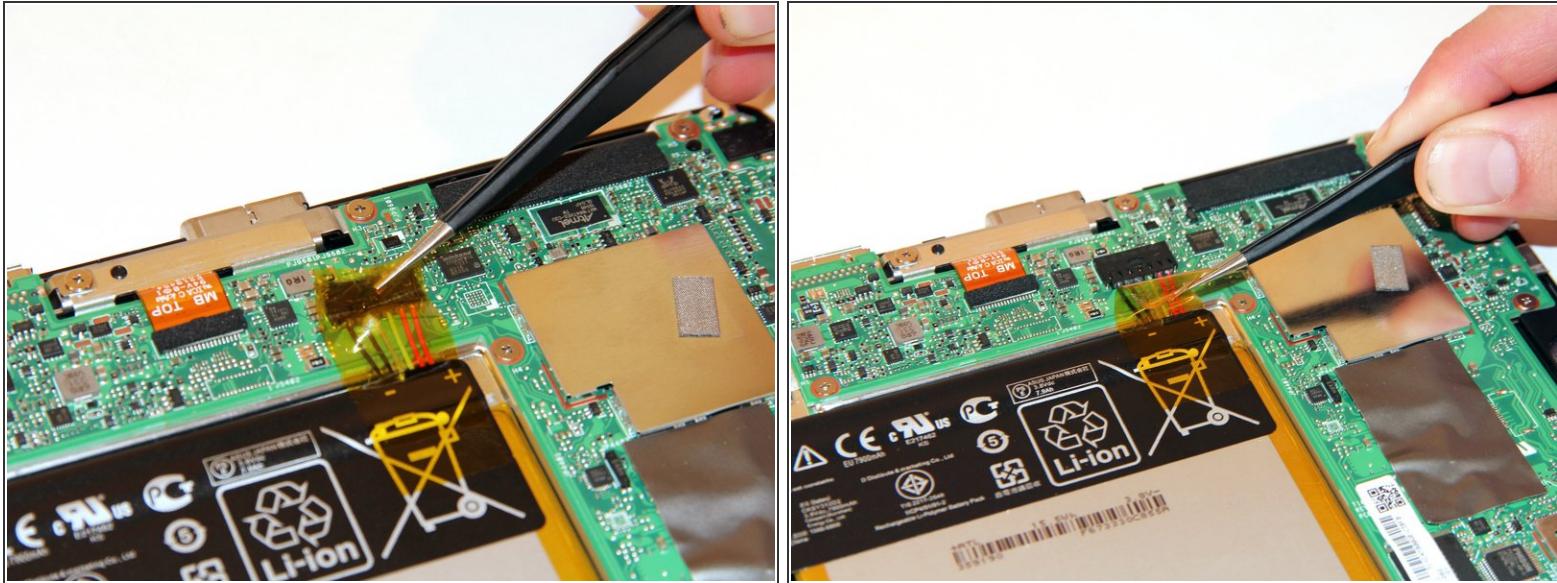

- Gently pull back the yellow transparent plastic covering on top of the battery connection port.


## Step 7



- Rotate the device so the top of the screen is facing you. Place the plastic opening tool underneath the battery and gently pry upwards to lift the battery out.

**(i)** The battery wire harness will slide out as the battery is pried up.

## Step 8

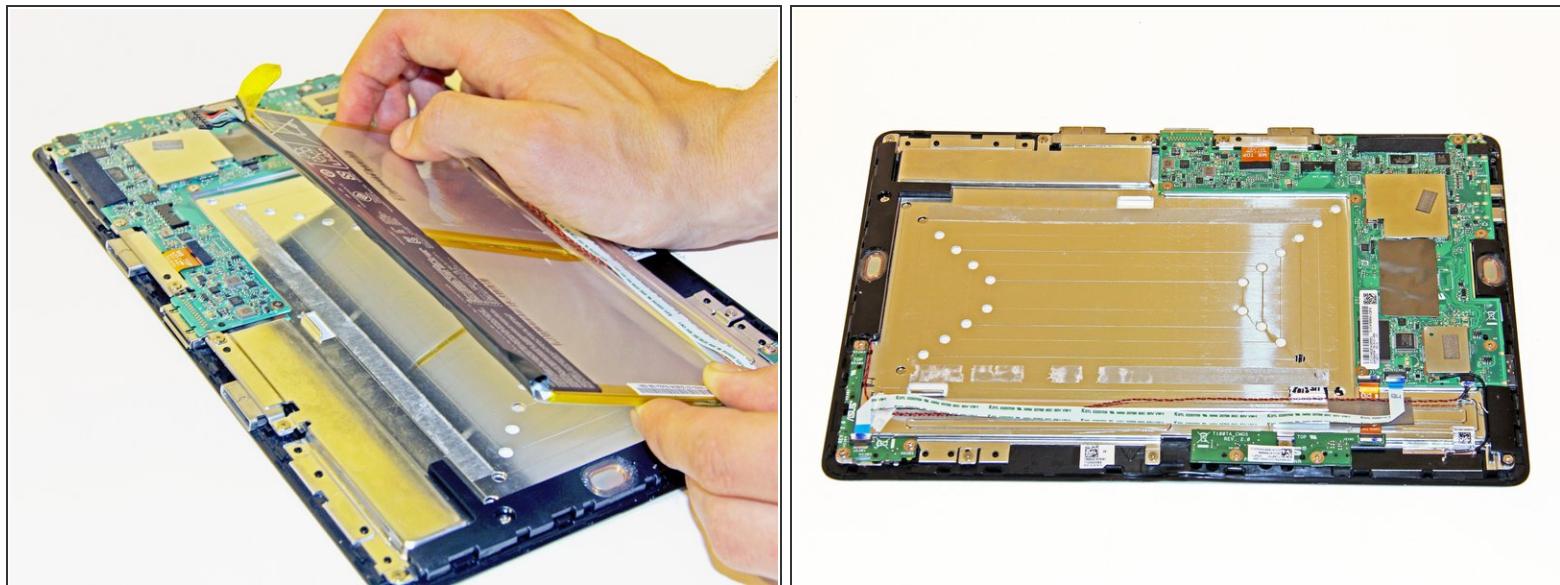

- Remove the battery by slowly peeling the battery away from the connected side.
- The adhesive on the back will pull away from the battery.

To reassemble your device, follow these instructions in reverse order.