




Canon EOS 300 Side Panel with Grip Replacement

Guide for removing the side panel with the grip.

Written By: Jordan Tang

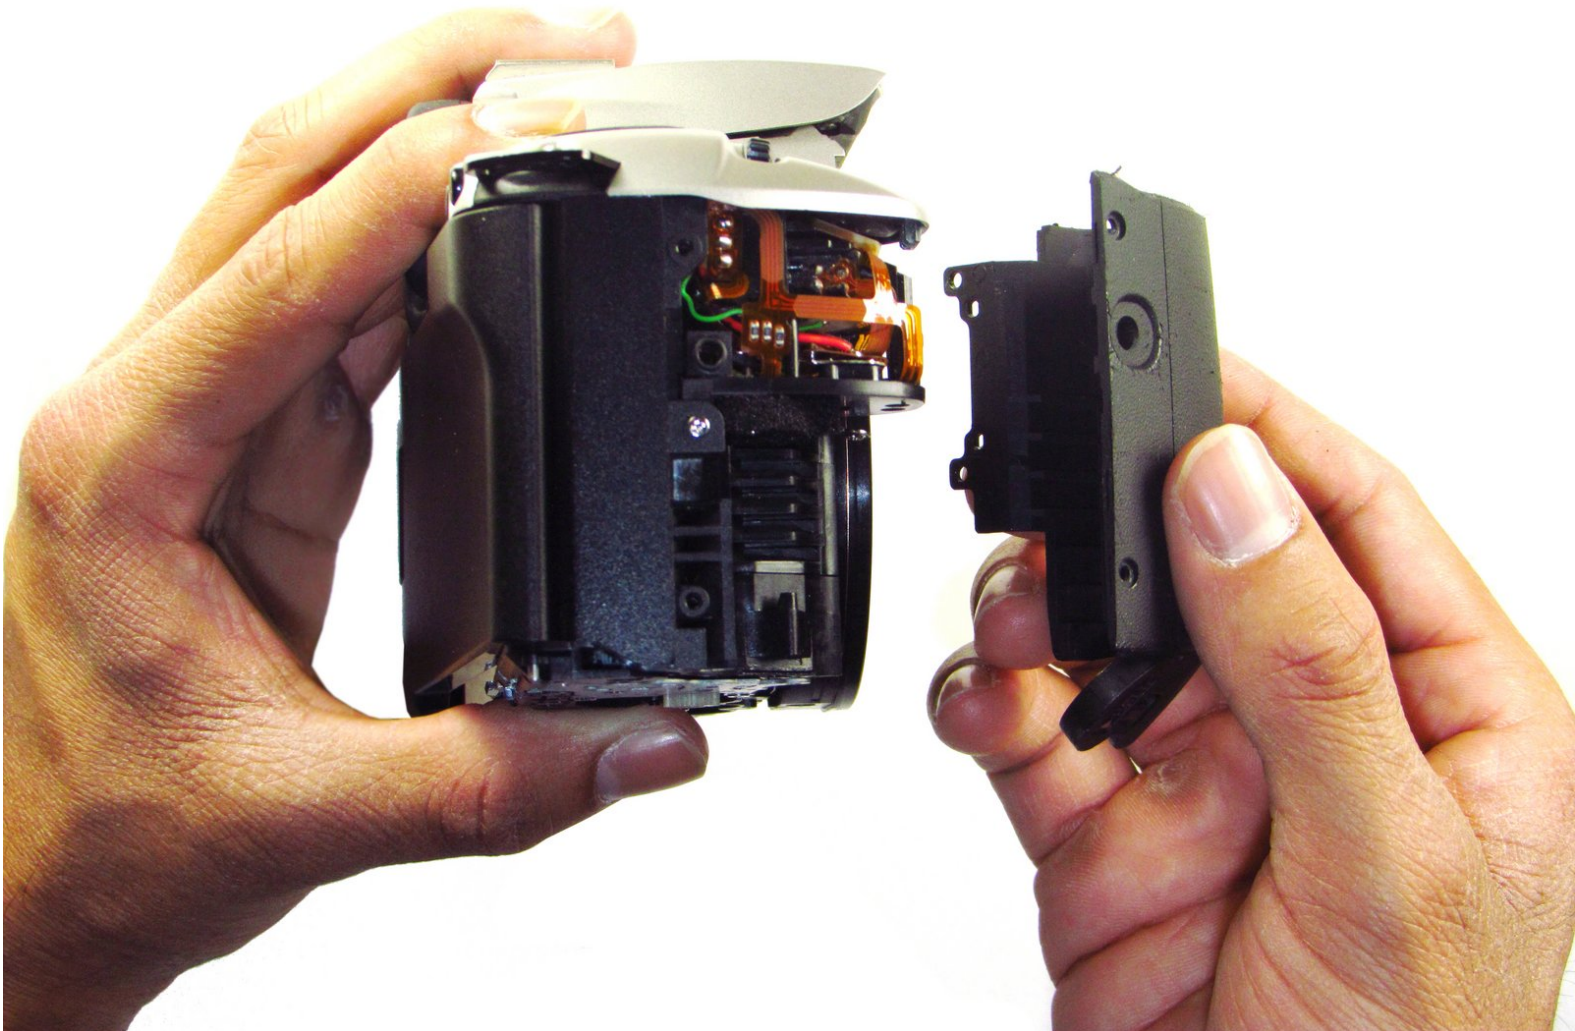

INTRODUCTION

Removing the side with the grip allows for replacements on the battery door, as well as access to the top panel.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Batteries




- Open up the battery door.

Step 2



- Remove the batteries from the camera by sliding them out into your palm.

Step 3 — Side Panel with Lever

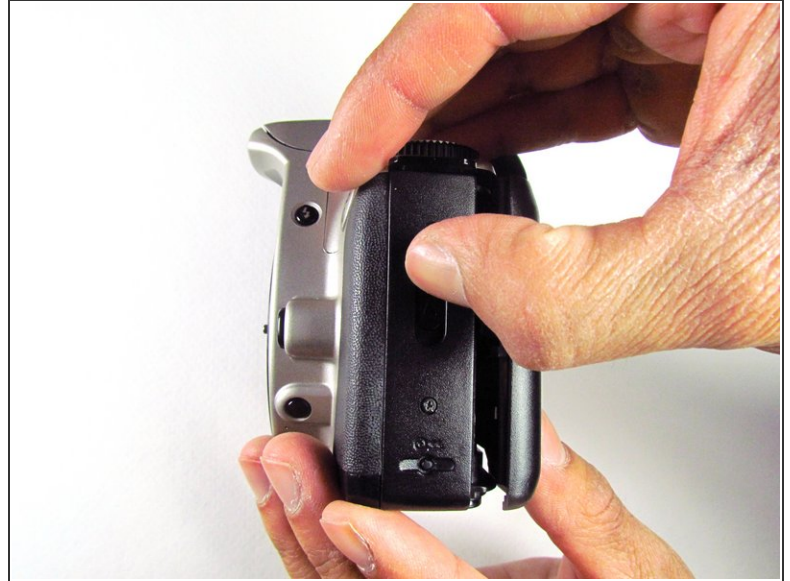


- Release the side latch to open the back panel.

Step 4



- Remove the two black 4.5mm screws above and below the latch.

Step 5

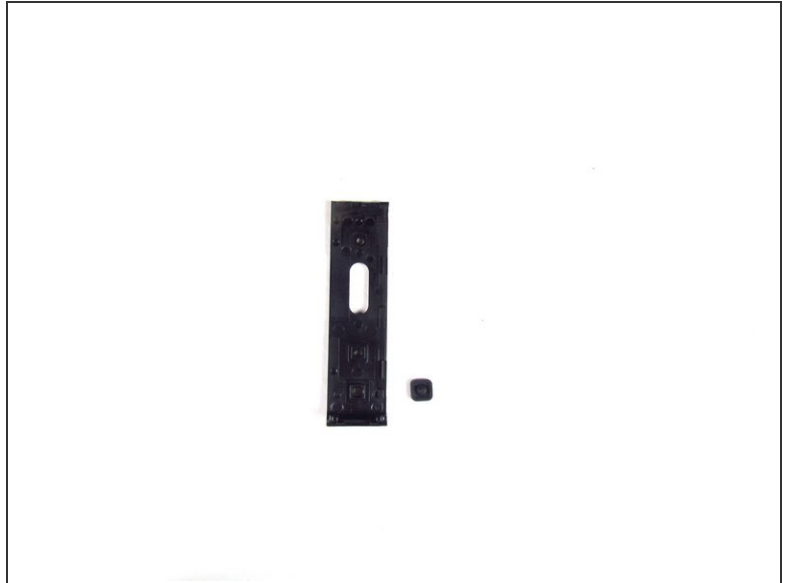

- Using your finger, carefully pry open the side panel from the top of camera.
- Pull panel downwards to remove.
- ⓘ Make sure to keep track of the small black piece of rubber under the latch.

Step 6 — Front Panel



- Remove the two silver 6mm Phillips #1 screws.

Step 7




- Flip camera over to the bottom.
- Remove the one 5mm Phillips #1 silver screw.

Step 8




- Remove the front panel by pulling away from the side with the lever.

Step 9 — Bottom Panel

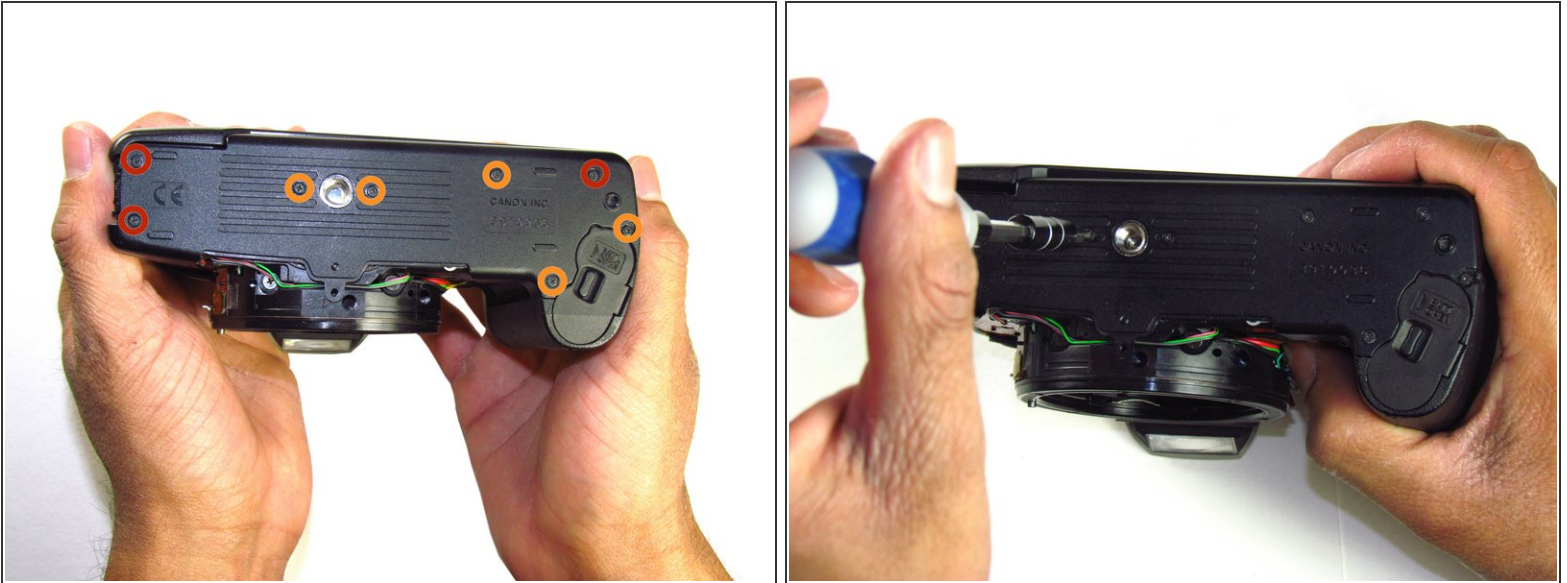

- Remove three black 7.3mm Phillips #1 screws located on the corners of the camera.
- Remove five black 4.8mm Phillips #1 screws.

Step 10

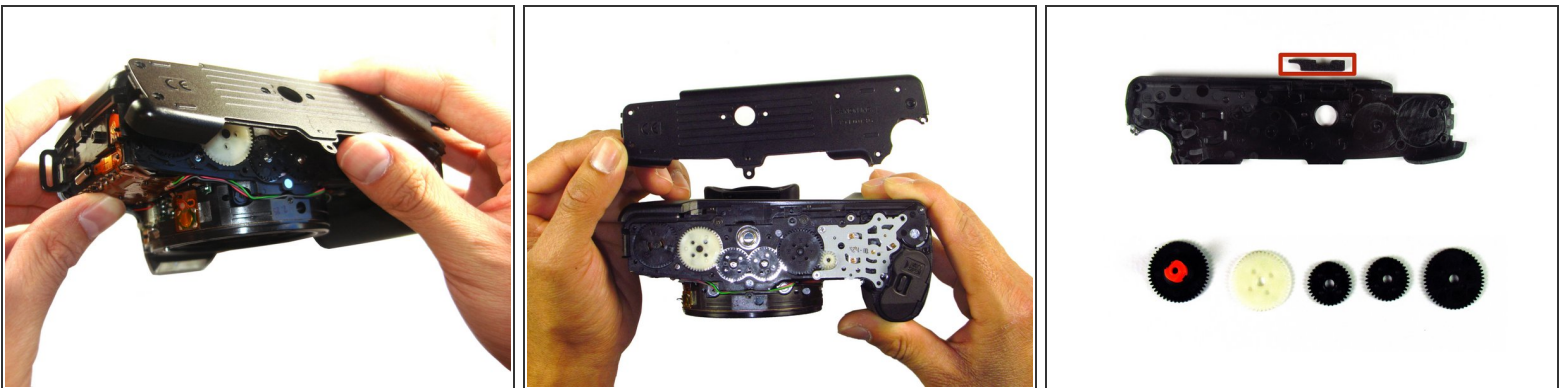

- Simply remove the bottom panel by prying it off with your finger.
- ⚠ When removing the panel, be sure the bottom of the camera is facing upright. There are loose gears that may fall out.
- Be wary of a loose piece of foam attached to the bottom panel.

Step 11 — Side Panel with Grip



- Remove the remote control socket cover.

Step 12




- Remove two black 4.5mm Phillips #1 screws.

Step 13



- Remove two black 4.8mm Phillips #1 screws on the front of the camera.

Step 14

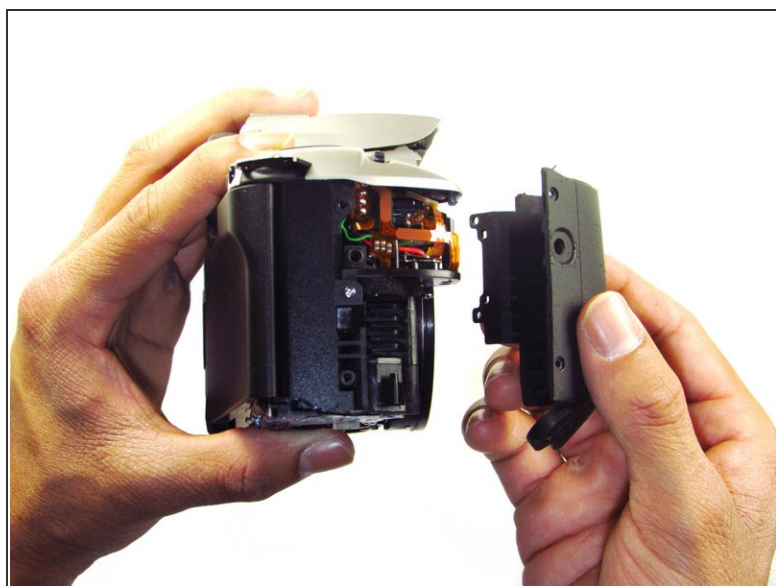

- Pry open the side grip using a spudger.

To reassemble your device, follow these instructions in reverse order.