



# Curtis RCD718 Teardown

Teardown of a Curtis RCD718 home stereo.

Written By: bthompsdavid




## INTRODUCTION

Teardown of a Curtis RCD718 home stereo.

### TOOLS:




- Essential Electronics Toolkit (1)

## Step 1 — Curtis RCD718 Teardown

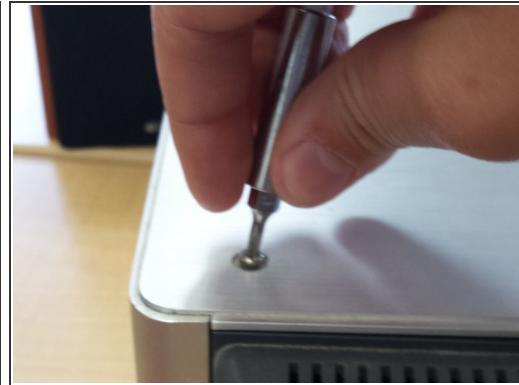

- First things first, you're gonna need to remove the outside screws that will be in your way later if you don't remove them.
- Start off on the back, there are a total of 6 screws on the back side of this stereo. You only need to remove 2, the 2 that are on the grey part, not the metal. More specifically, the screw that is under the speaker plug-ins, and the screw on the top middle of the back.
- Next you will need to remove the screws on the top. This is the only place in/on the entire stereo where the screws are NOT Phillips. For these screws, you will need a hex 2.5 screwdriver, this can be found in most iFixit kits. There are 4 of them on the top of the stereo.

## Step 2

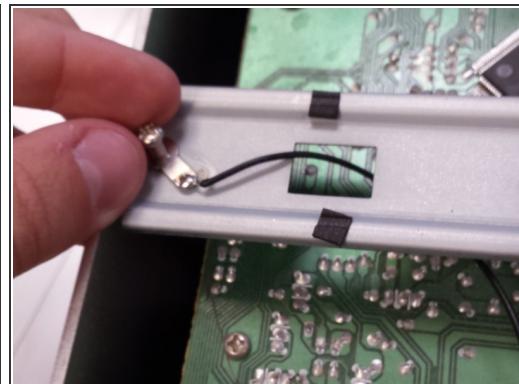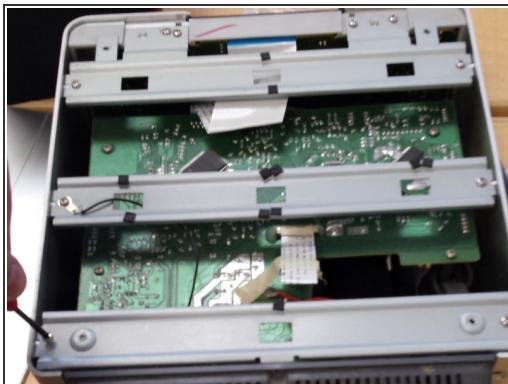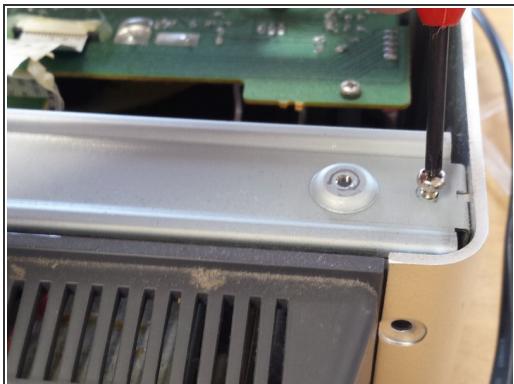

- Once you have the cover off, you will need to remove the 3 metal bars that are placed across the device. Be careful with the middle section, there is a wire attached to the screw that you will need to slide through the slot in the metal bar.