



Disassembling Kodak Easyshare C813 Front Cover

Written By: Susan Marano



INTRODUCTION

This guide demonstrates how to remove the front and back cover from the camera

TOOLS:

- [Anti-Static Wrist Strap \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery



- Turn off camera by firmly pressing the power button that is located on the top of the camera near the selector dial.

Step 2



- Press thumb firmly on battery door and slide it in the direction of the arrow.
- Lift thumb allowing the door to swing open.

Step 3 — Back Cover



- Before removing back cover, it is advisable to use an [anti-static wrist strap](#) to prevent damage to electronics.

Step 4




- Turn the camera off by firmly pressing the power button located on top of the camera.

Step 5



- Locate the 7 screws holding the back cover on.
 - Three screws are located on the bottom of the camera.
 - Two screws are located on the side shown in the photograph.
 - Two final screws are located on the opposite side shown in the photograph.

Step 6

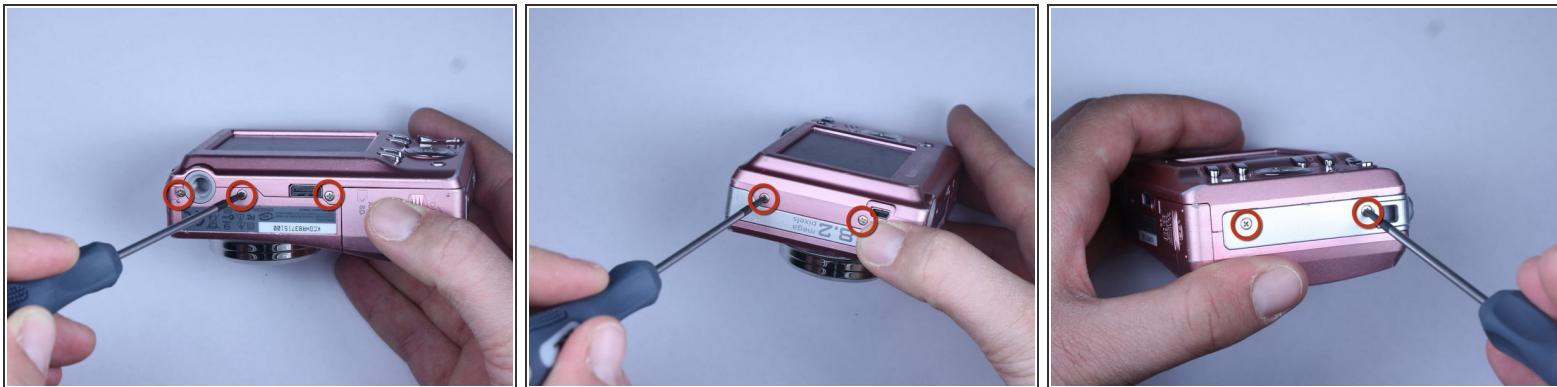

- Remove all 7 screws:
 - Hold the camera firmly with one hand so that you can still see a screw.
 - Place the Philips 00 ([Found here](#)) screwdriver into the screw.
 - Turn the screwdriver to the left until it is free.
 - Repeat for the remaining screws.

Step 7




- Use [plastic opening tools](#) to slightly open the side of the case.
- Insert a plastic opening tool and apply pressure to the internal three tabs at the top.
 - The first two are near the words "3X Optical Zoom".
 - The third is near the shutter button.

Step 8




- Gently pull apart the back cover from the rest of the camera.
- Make sure there are no more screws or tabs keeping the cover on.
- Use the plastic opening tool to separate any sides still closely connected.

Step 9 — Front Cover

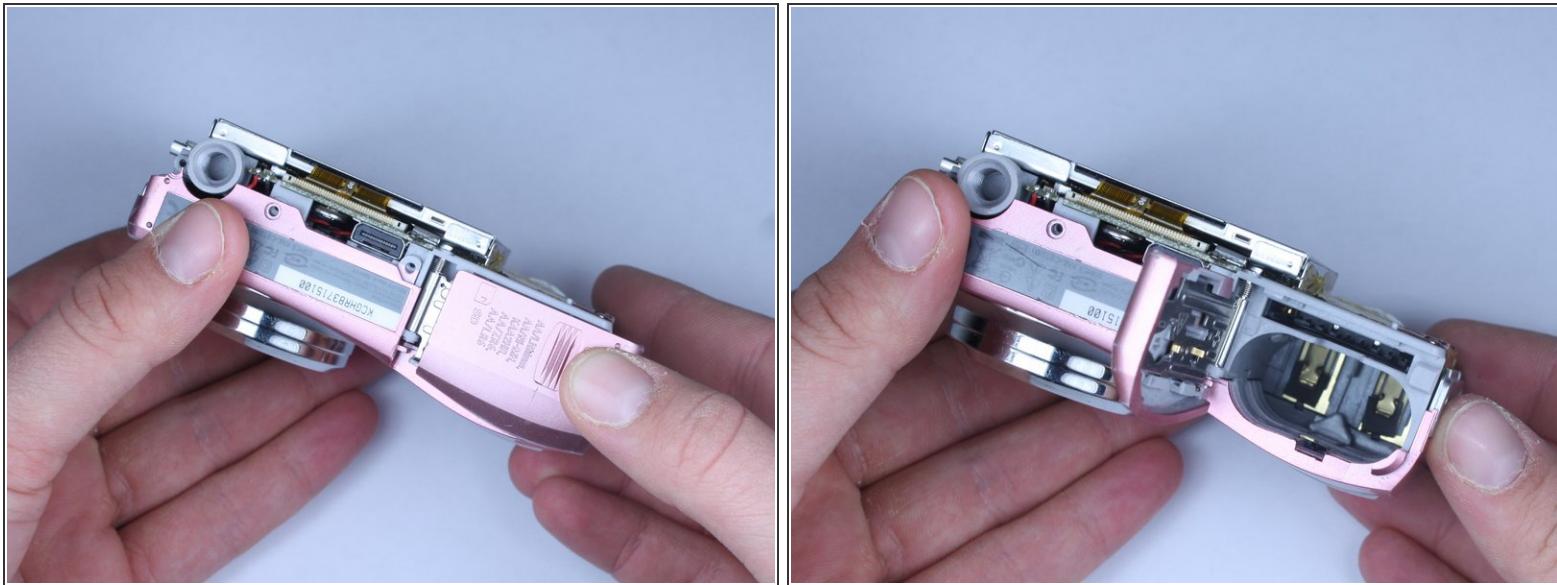

- Open the battery door.
- Press thumb firmly on battery door and slide it in the direction of the arrow.
- Lift thumb allowing the door to swing open.

Step 10

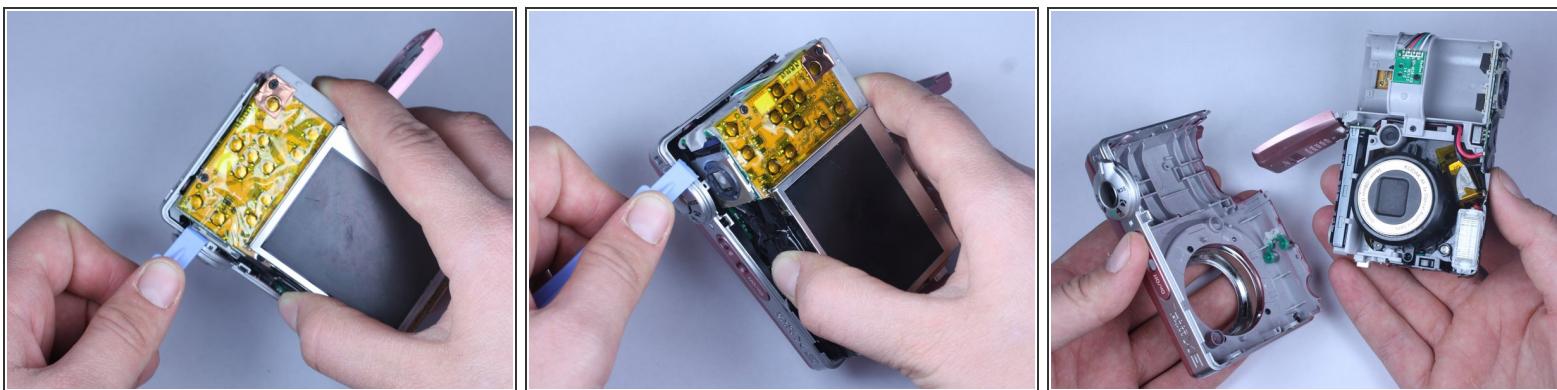

- Use the plastic opening tool to lift the casing around the shutter button.
- Gently remove the front cover from the device.

Step 11



⚠ Do not touch the terminals shown in the photo. These link to the capacitor which could shock you if not discharged.

- To discharge the capacitor follow this [guide](#).