



Game Boy Color Teardown

Written By: Marcus Broughton



INTRODUCTION

This is my teardown of the Game boy colour.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Tri-point Y0 Screwdriver](#) (1)

Step 1 — Game Boy Color Teardown



- Take the Game boy and notice the way that it has been injection moulded using two tools on the injection moulder. The first thing to do is to separate these parts.

Step 2



- Remove the Game Boys battery case from the back of the game boy and take out any batteries that are inserted. this will leave you with the back panel.

Step 3



- The Two screws at the top of the back panel can be unscrewed using a very small screw driver. the head must be very small as these are hard to get too.

Step 4




- The other small screws in the back panel are very hard to get to you need to drill these out but be careful not to damage the gameboy because this can crack the back panel.

Step 5




- The two panels are snap fitted so you will need to pop them part use something to wedge the crack open.

Step 6

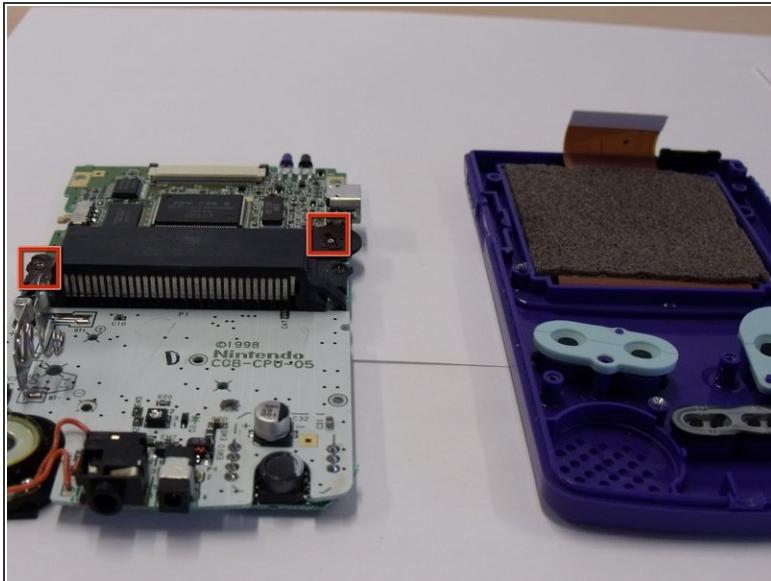


- To remove the main board just remove the 4 screws in the back doing this will mean you can take the board out of the abs plastic sections.

Step 7

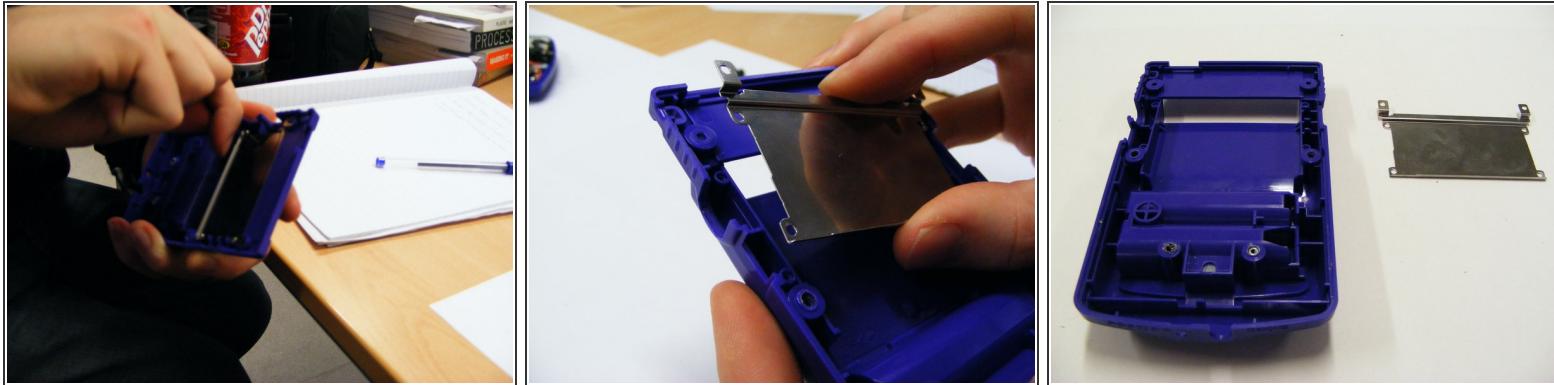


- The metal cassette holder on the back plastic panel can be removed by simply using a small screw driver in all four corners this should mean it pops off.

Step 8

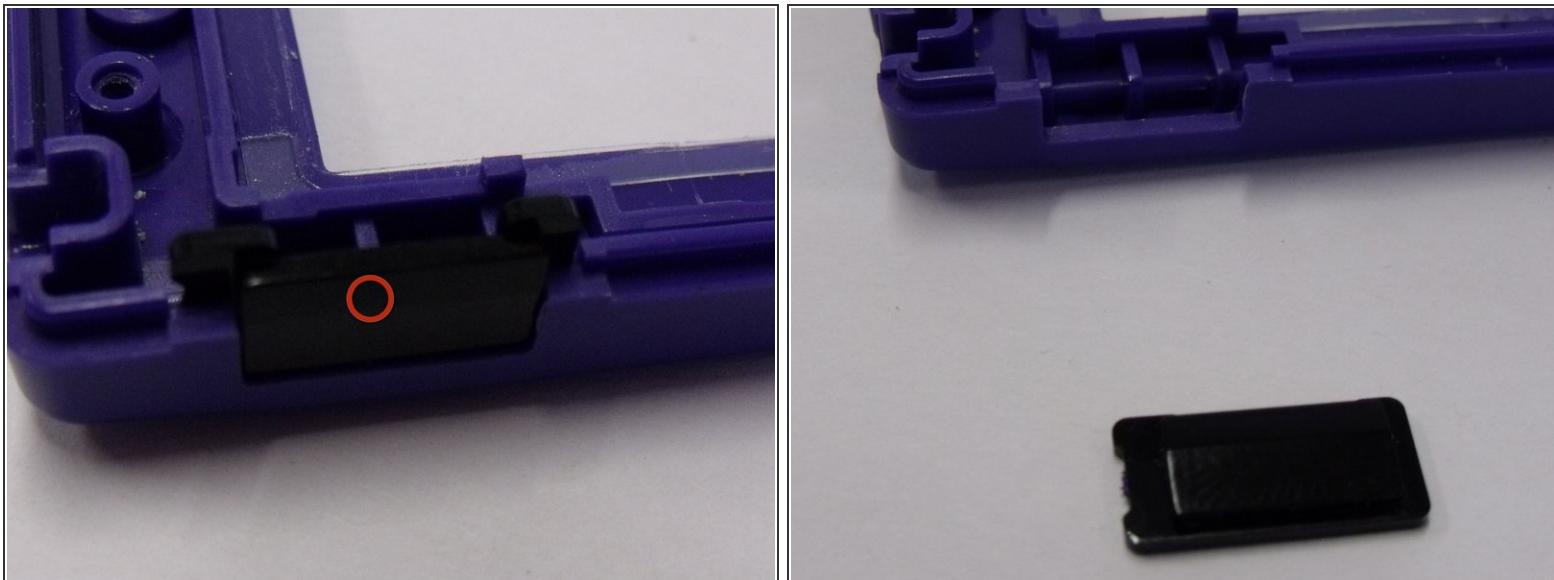


- The small plastic switch should just fall out of the plastic case make sure not to lose this when opening up the game boy.

Step 9

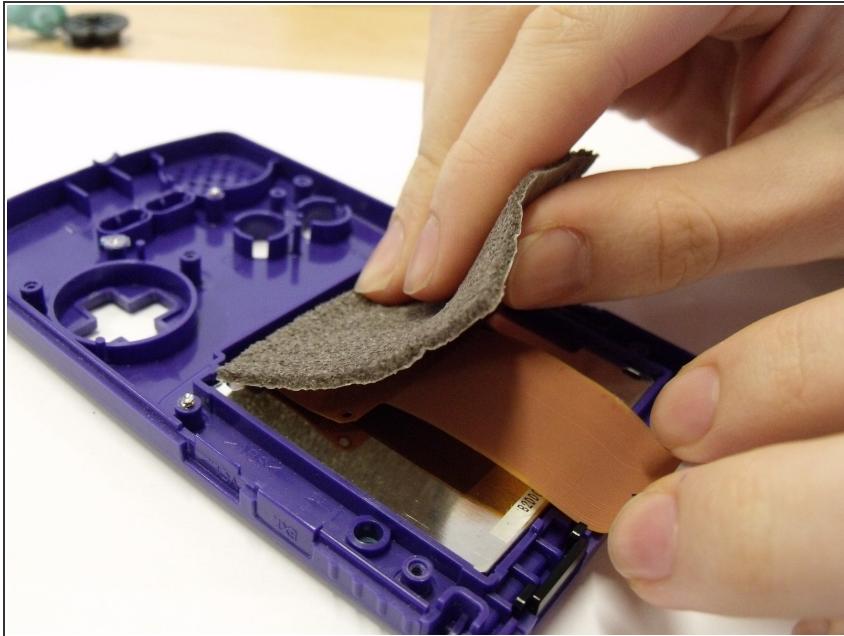


- You can simply pull the foam off the back of the screen pulling off the glue try not to tear the foam this makes things easier later.

Step 10

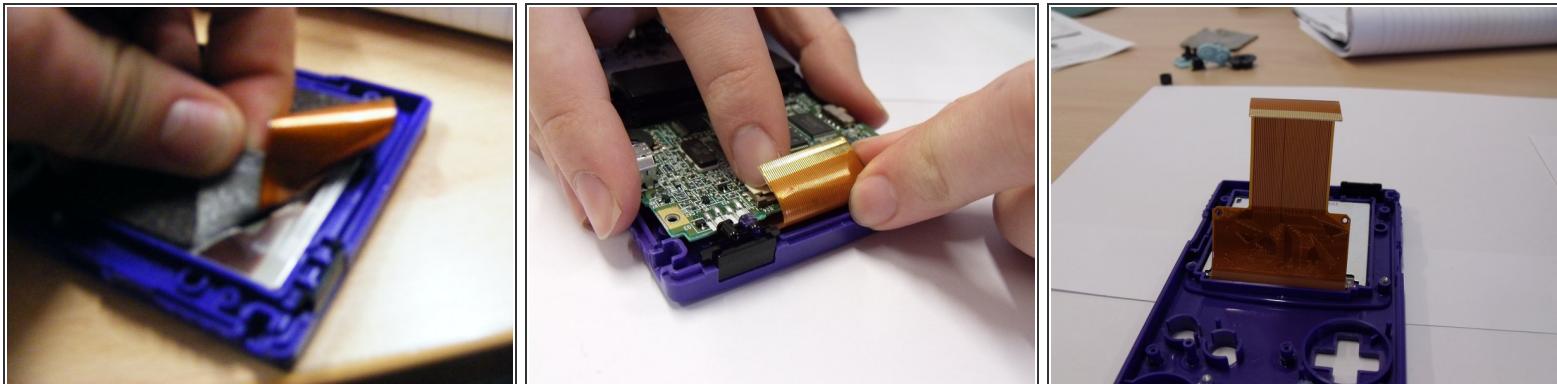

- Once the foam is off you can pull the main connection of the screen out this is the brown part of plastic sheeting it simply slides out.

Step 11

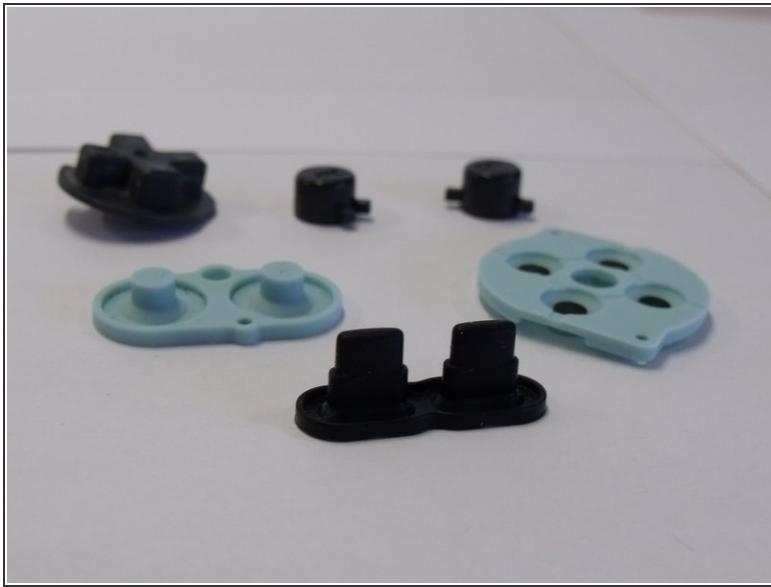


- The rubber buttons can easily be pulled off they are not held in but will need a little pull.

Step 12




- All the other buttons should just fall out. Be careful not to drop or lose these parts because they will come loose.

Step 13

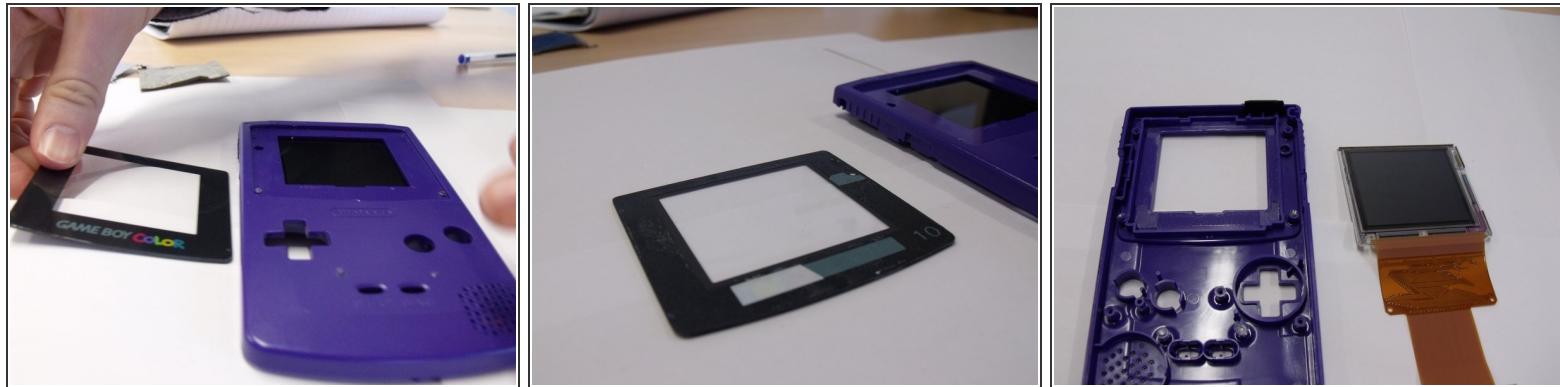


- Pull the screen out of the game boy and take the front panel of plastic away and move it to the side.

Step 14

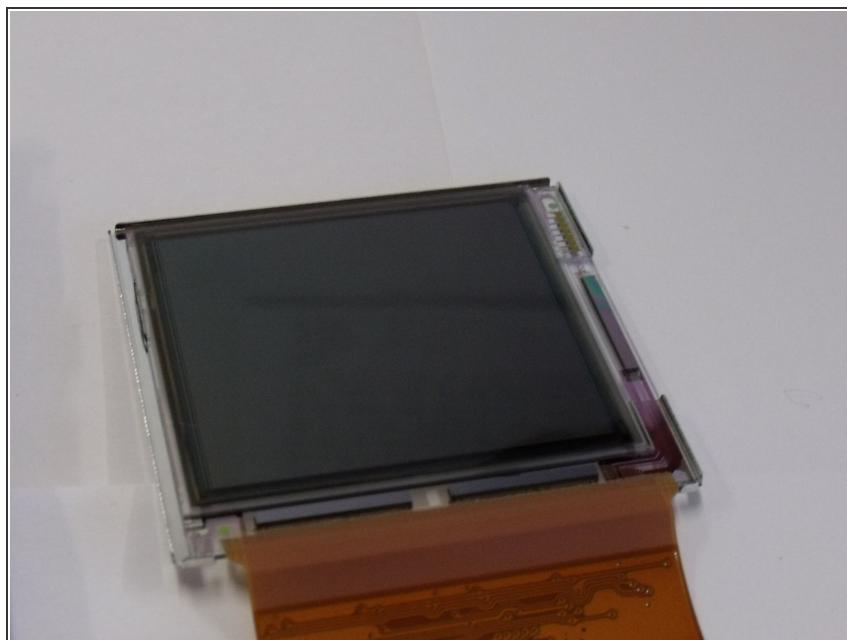


- Peel off the protective film on the LCD screen and remove the LCD screen from the casing.

Step 15

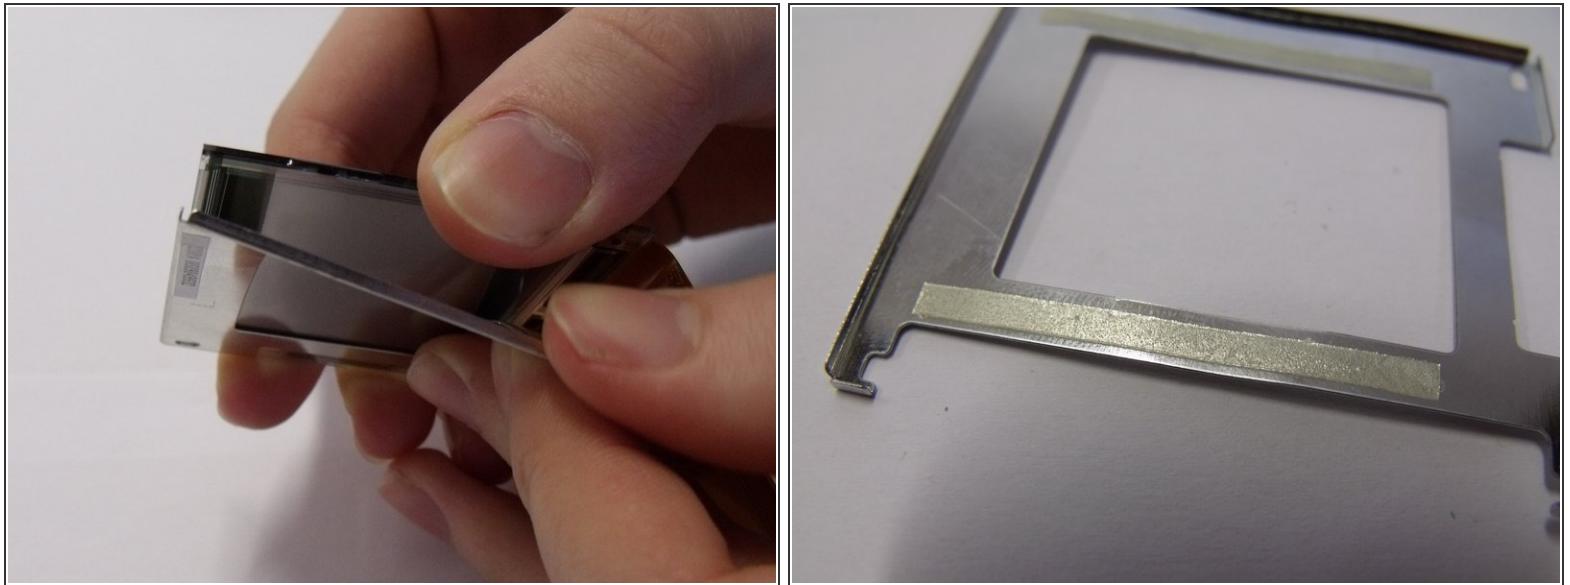

- The metal on the screen can be pulled off by getting under it with your fingers this is stuck with a tape.

Step 16

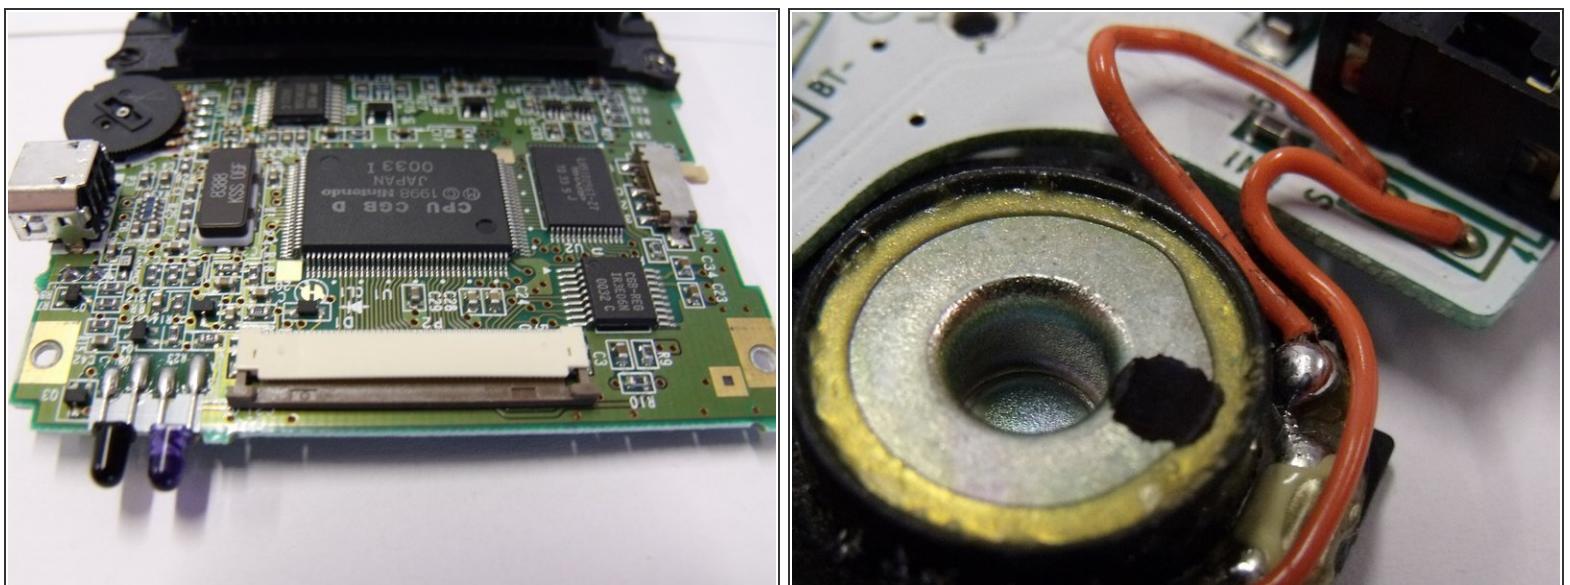

- some parts of the circuit board can also be removed and looked at much closer such as the speakers and the LED lights on the product.

To reassemble your device, follow these instructions in reverse order.