



# HP Pavilion 14-b015dx Wireless Card Replacement

This guide will assist you in removing/replacing the wireless card in your HP Pavilion 14-b015dx.

Written By: Gregory Bridge



## INTRODUCTION

The purpose of this guide is to give the necessary steps to remove your network card.

### TOOLS:

- iFixit Opening Tools (1)
- Phillips #0 Screwdriver (1)

## Step 1 — Battery



 Make sure the computer is completely powered down and unplug the power cord.

## Step 2



- Place the device on your work surface with bottom facing up and the battery located at the top.

## Step 3



- Slide the left release tab toward the center of the computer to the unlock position. Next slide the right tab toward the center of the computer and hold it there while completing step 4.

## Step 4




- Remove the battery by sliding it upwards and away from the computer.

## Step 5 — Keyboard



- Unscrew the ten 6.0 mm Philips head screws on the base of the device with a Phillips #0 head screwdriver.

## Step 6

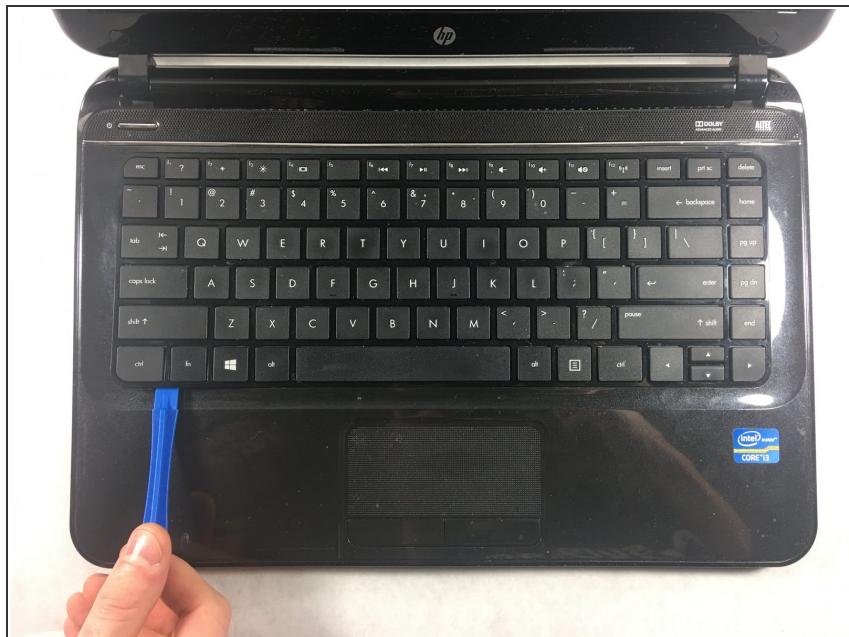


- Insert the plastic opening tool between the keyboard and the plastic housing.
  - Pry the keyboard upward away from the device.
  - Move the tool around the edge of the entire keyboard while continuing to pry.
- i** You will hear the clips pop once you have released them.

## Step 7




- Once you have released all of the clips, slowly lift the keyboard exposing the ribbon cable.
- Lift the tab on the keyboard ZIF connector with a plastic opening tool and gently remove the ribbon cable.

## Step 8 — Palm Rest

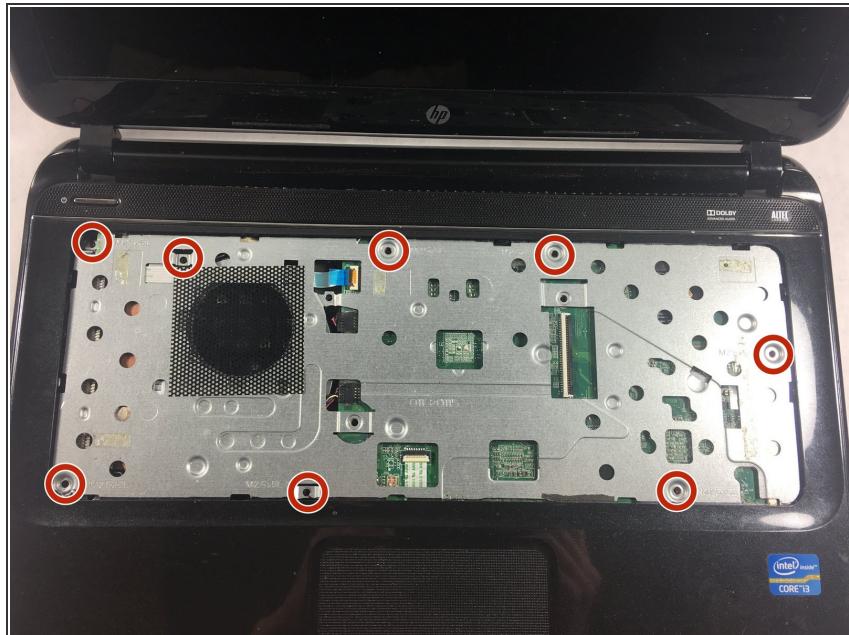


- Remove the eight 6.0 mm screws located under the keyboard with your Philips #0 screwdriver.

## Step 9

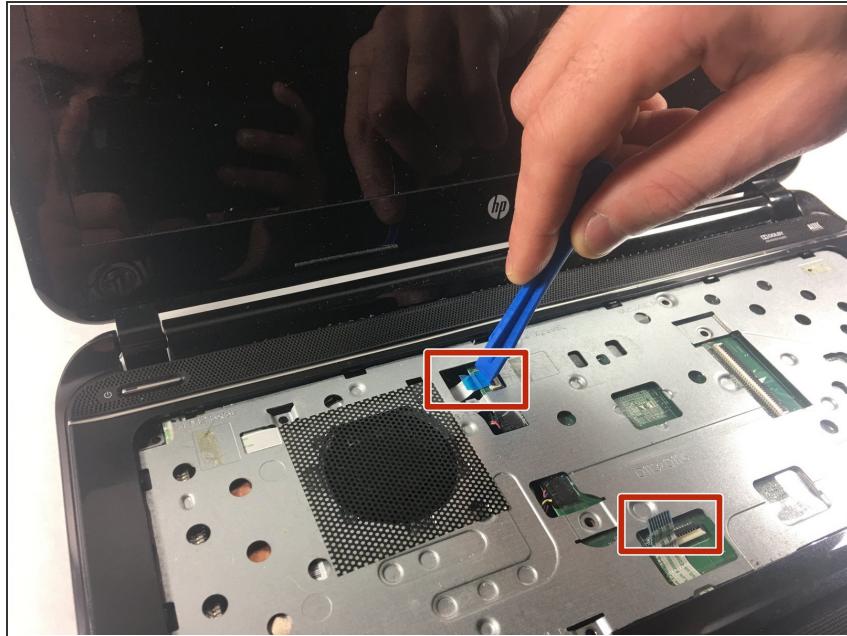

- Remove the track pad and power button ribbon cables.
- Lift the locking bar on each connector with a plastic opening tool and gently remove the ribbon cables

## Step 10

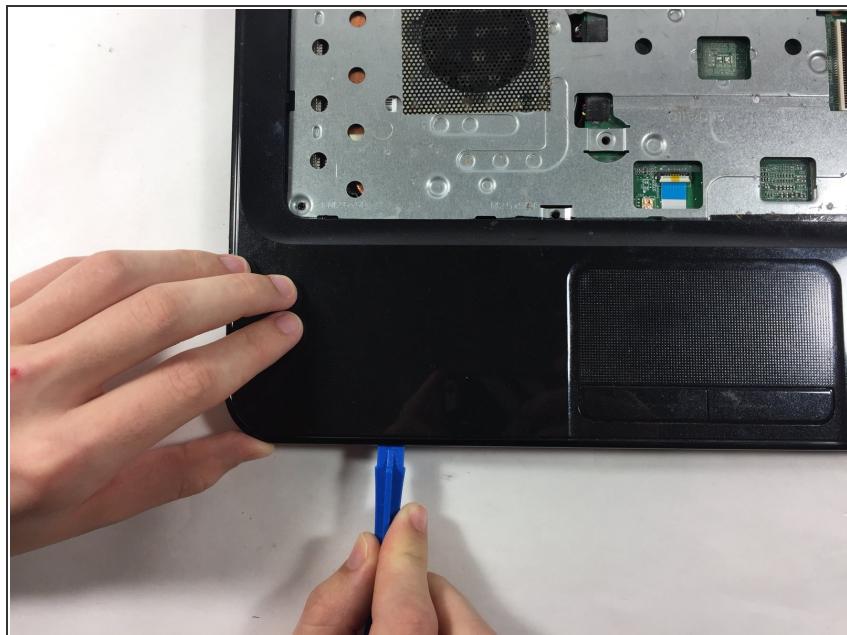


- To remove the palm rest, insert the plastic opening tool in the seam between the palm rest and the base.
  - Pry upward to undo each clip.
- i** Continue this process around the entire palm rest.

## Step 11




- Once all clips have been undone lift the palm rest away from the laptop.

## Step 12 — Wireless Card

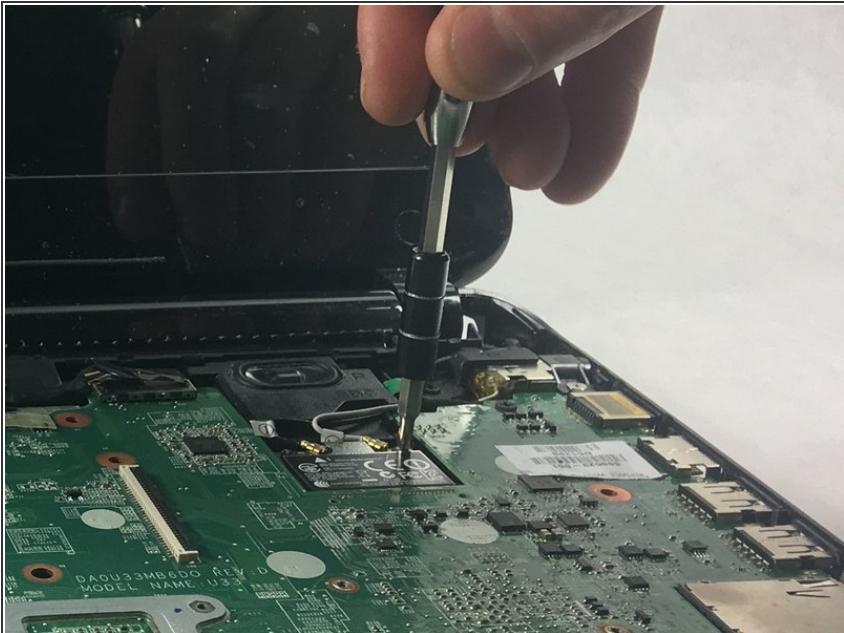

- Remove the two 4.0 mm long screws on the corners of the wireless card the using a Philips #0 screwdriver.

## Step 13

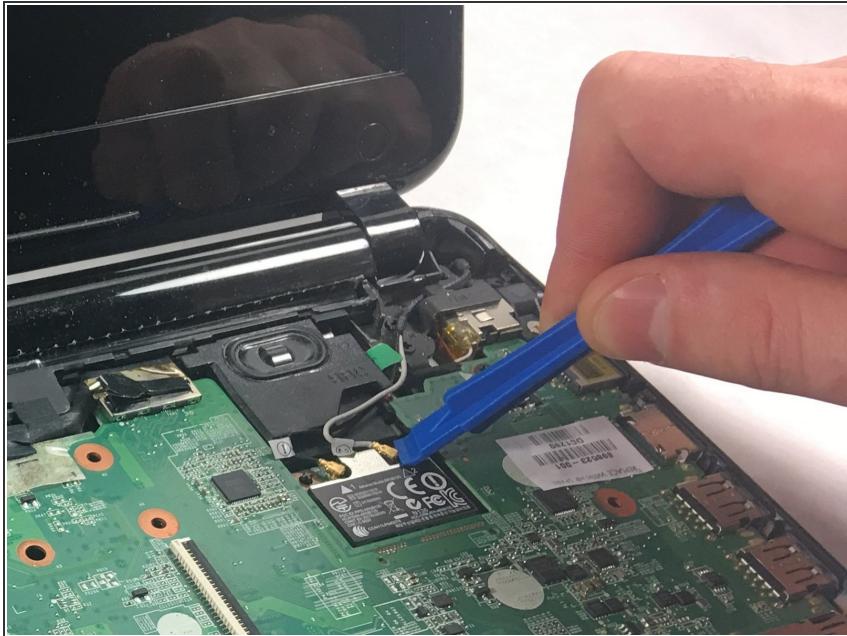

- Remove the black and white wires attached to the wireless card by using your blue opening tool and prying upward.

## Step 14



- Once you have removed the screws and wires on the network card lift it up and away from the motherboard.

To reassemble your device, follow these instructions in reverse order.