



# HP Pavilion 17-x047na RAM Replacement

This guide will help replace the HP Pavilion 17-x047na RAM.

Written By: Khaise Brice



This document was generated on 2020-02-22 04:23:24 PM (MST).

## INTRODUCTION

This guide will help replace the HP Pavilion 17-x047na RAM.

### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [SIM Card Eject Tool](#) (1)

## Step 1 — Battery



 Turn off and unplug the laptop before replacing the battery.


- The netbook needs to be top-side down with the lid closed.
- Slide the plastic battery release latches towards the lock symbols.

## Step 2




- Slide the battery out from the laptop.

## Step 3 — Back Panel

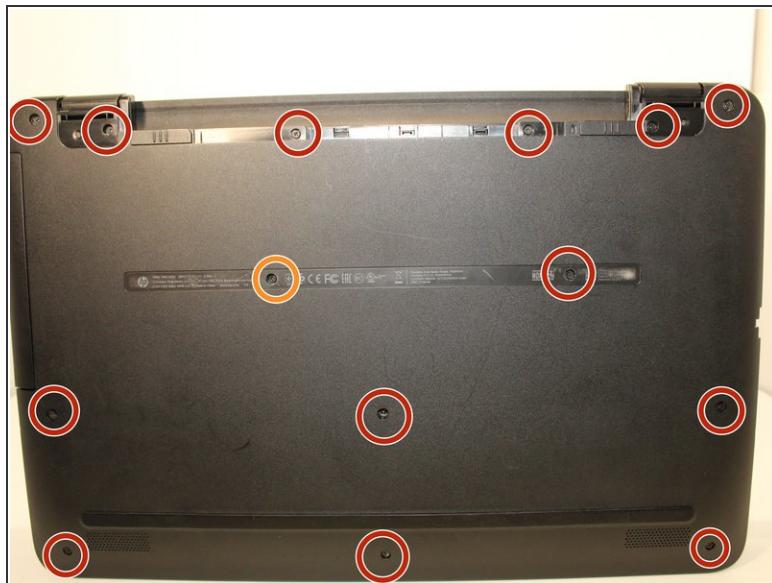

- Using a Phillips #0 screwdriver, remove thirteen 7.0 mm screws from the back case.
- Using a Phillips #0 screwdriver, remove the CD/DVD drive screw.
- Use an ejection pin to eject and remove the CD/DVD drive.


## Step 4

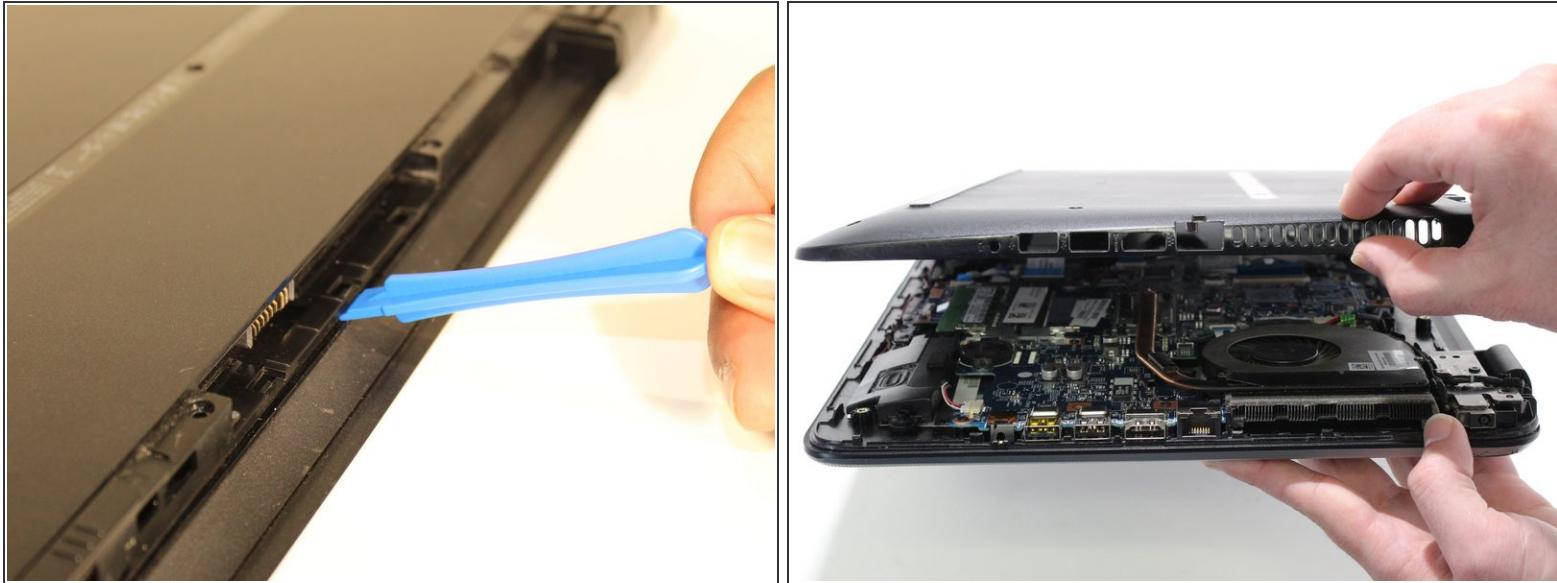

- Use an iFixit opening tool to separate the back cover from the laptop.


⚠ Gently pry open the cover, trying not to break the plastic.

## Step 5 — RAM

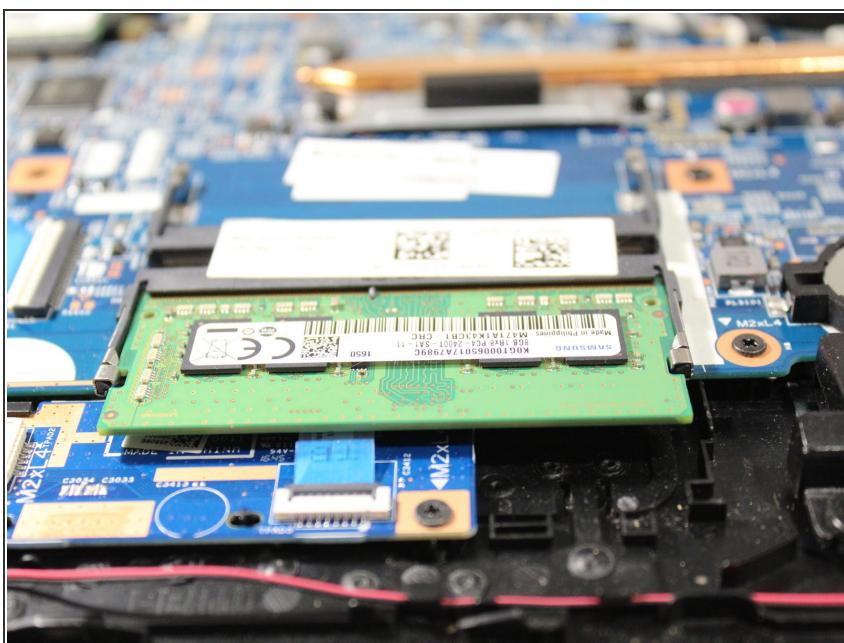

- Locate the RAM.

## Step 6

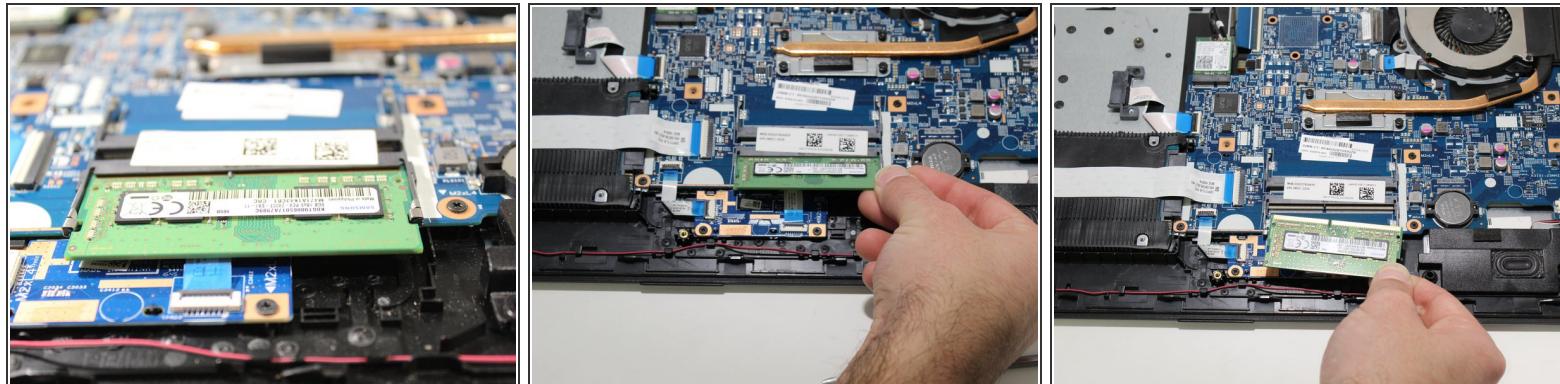

- Pull the latches outward to the left and right, if done correctly the ram will pop upward.
- Gently pull out the RAM from the socket.

To reassemble your device, follow these instructions in reverse order.