



HTC One Max Fingerprint Sensor Replacement

Use this guide to replace a faulty fingerprint sensor.

Written By: Andrey Sklyar



INTRODUCTION

In this guide you are going to learn how to replace the fingerprint sensor on the HTC One Max phone.

TOOLS:

- Spudger (1)
- Phillips #00 Screwdriver (1)
- Tri-point Y00 Screwdriver Bit (1)

PARTS:



- HTC One Max finger print sensor (1)

Step 1 — Back Case




- Lift back cover while pressing highlighted release switch towards the center of the phone.

Step 2

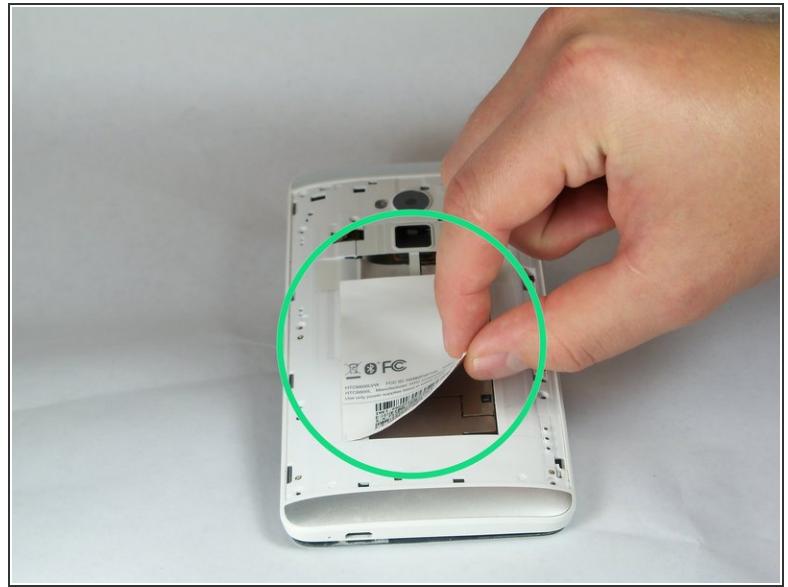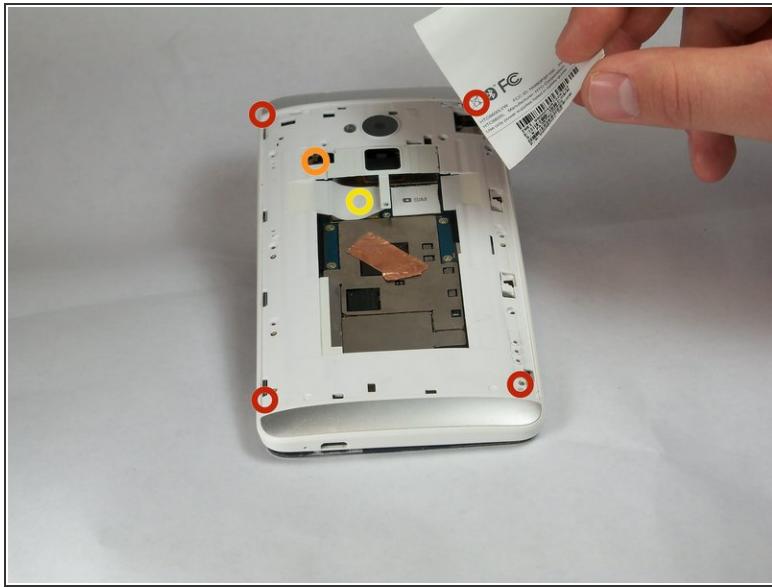



- Remove the four white stickers in each corner that cover the Tri-Wing screws.
- Remove the white sticker near the buttons that control the volume.
- Remove the white sticker near the SIM card.
- Remove the big white sticker with the bar-code in the center of the phone.

Step 3

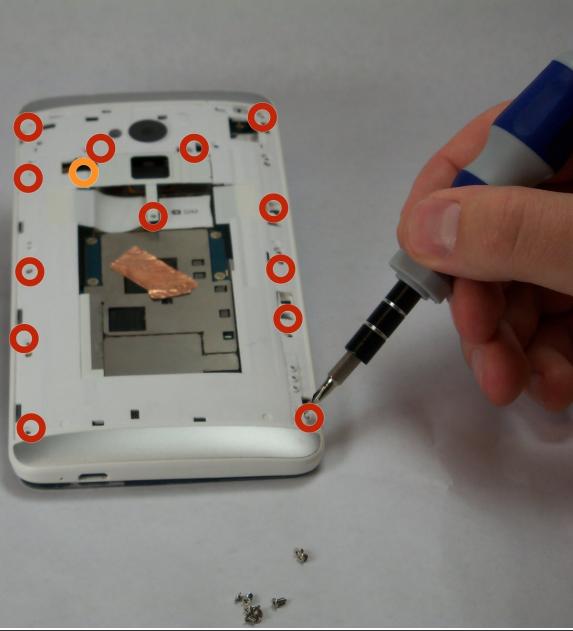

- Remove the thirteen Tri-Wing Y00 screws (Upper & Lower screws are 5 mm length, middle screws are 3.8 mm length) from the back case.
- Disconnect the cable near the volume buttons.

Step 4

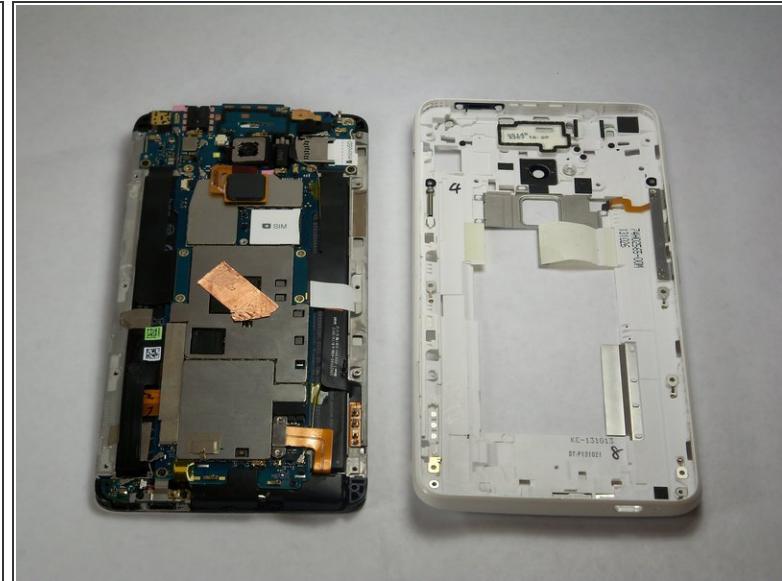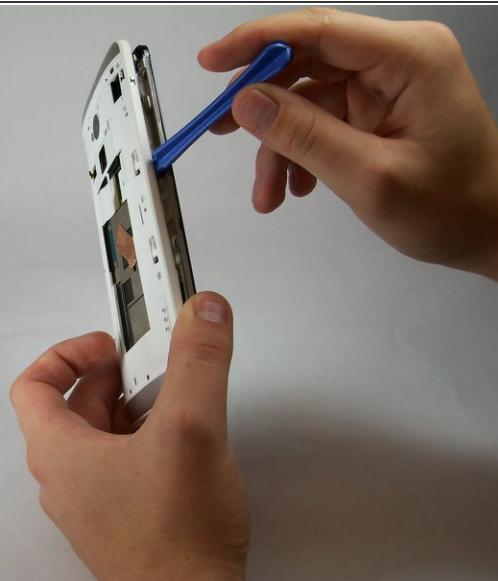

- Use the small plastic opening tool to pry between the screen and the rear case.

Step 5 — Fingerprint Sensor



- Use Tweezers to disconnect the ribbon cable connecting the fingerprint sensor to the motherboard.
- When replacing the fingerprint sensor, make sure the ribbon cable snaps into the port on the motherboard.

To reassemble your device, follow these instructions in reverse order.