




HTC Touch Pro CDMA Keyboard Replacement

To get to the keyboard part of the phone.

Written By: Zhaowei Zhang

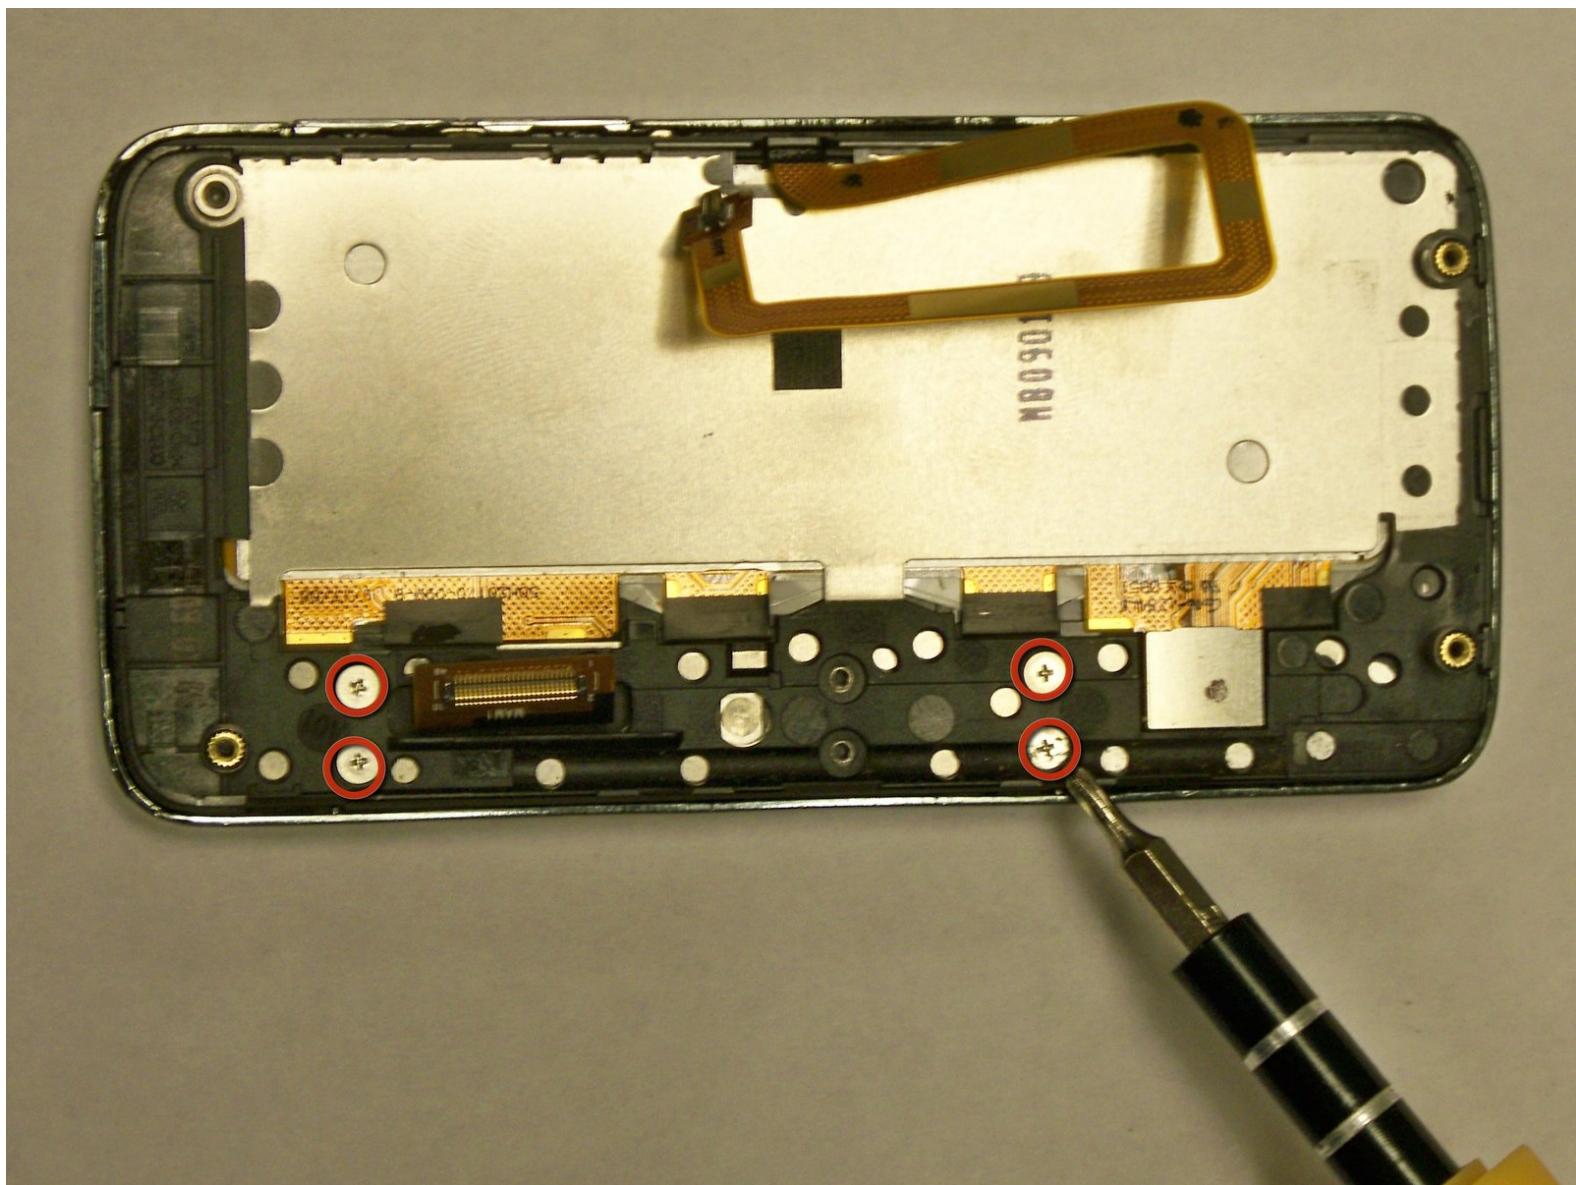

INTRODUCTION

To replace keyboard.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [T6 Torx Screwdriver](#) (1)

Step 1 — Battery




- First, gently press on the back plate and push down toward the camera.

Step 2




- Use your finger to lift up the edge of the battery.

Step 3 — USB Logic Board

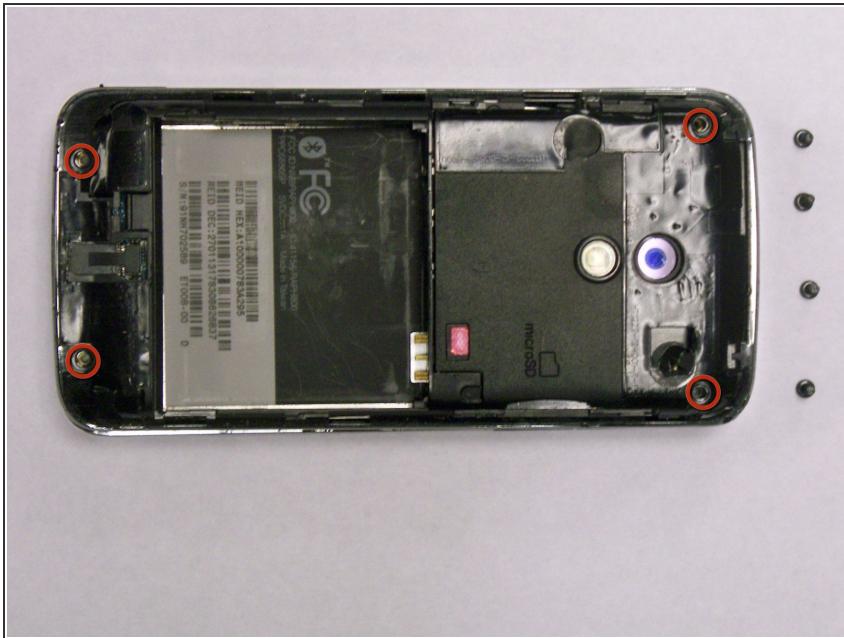


- Remove the 4 screws using the T6 screw driver.

Step 4

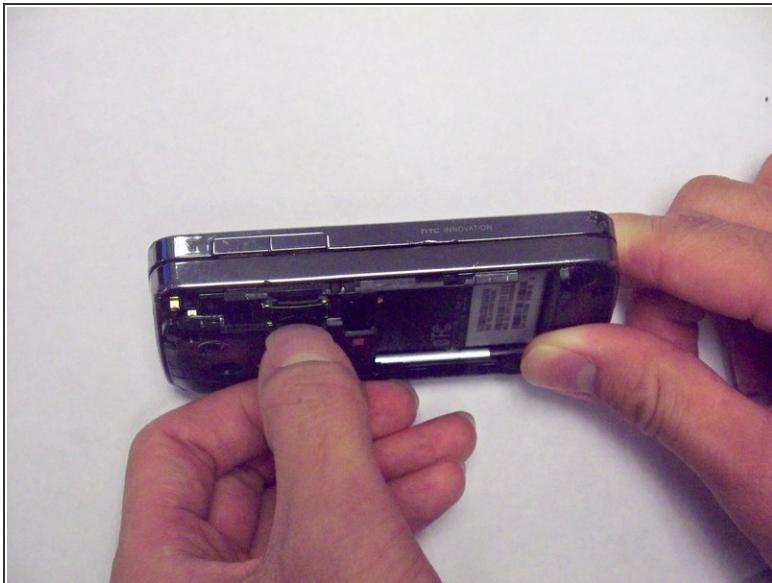



- Lift the plastic cover near the memory card slot.

Step 5

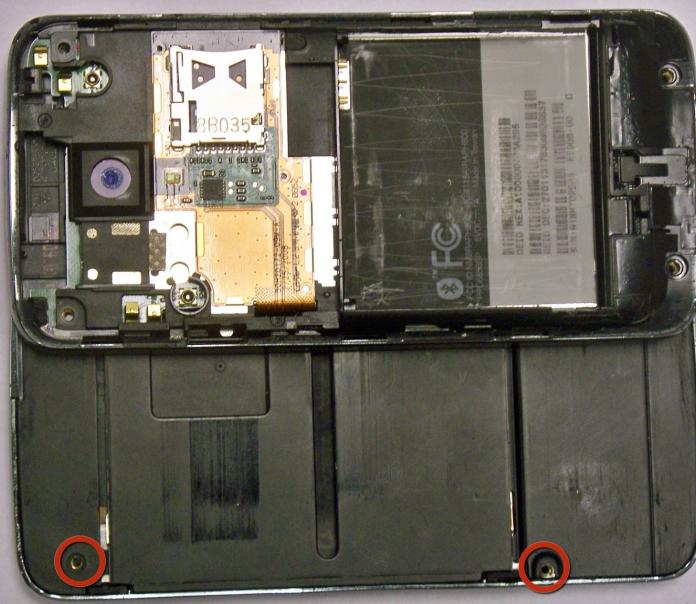



- Remove the two Phillips #00 screws from the backside of the screen.

Step 6

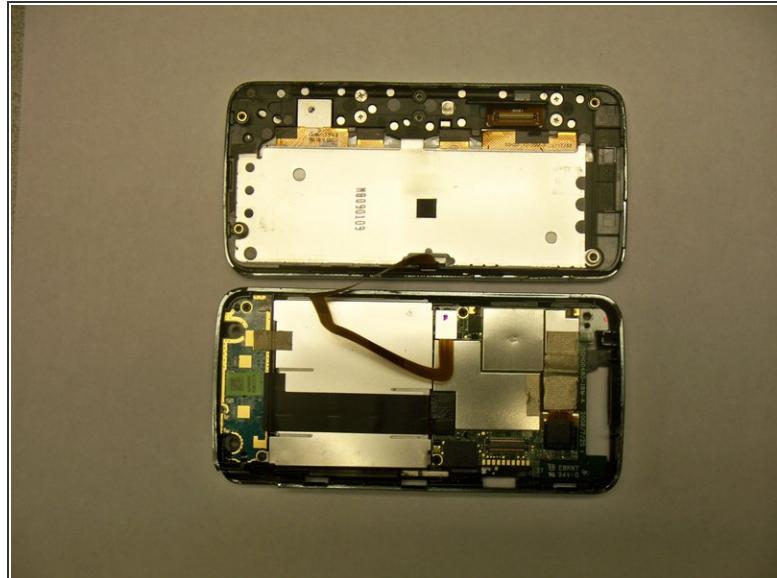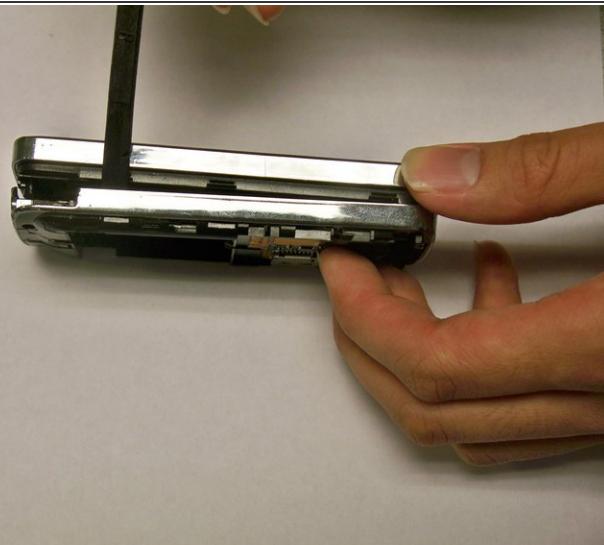



- Insert a spudger or a plastic opening tool into the seam on the side of the phone.
- Gently pry apart the two halves of the phone.

Step 7

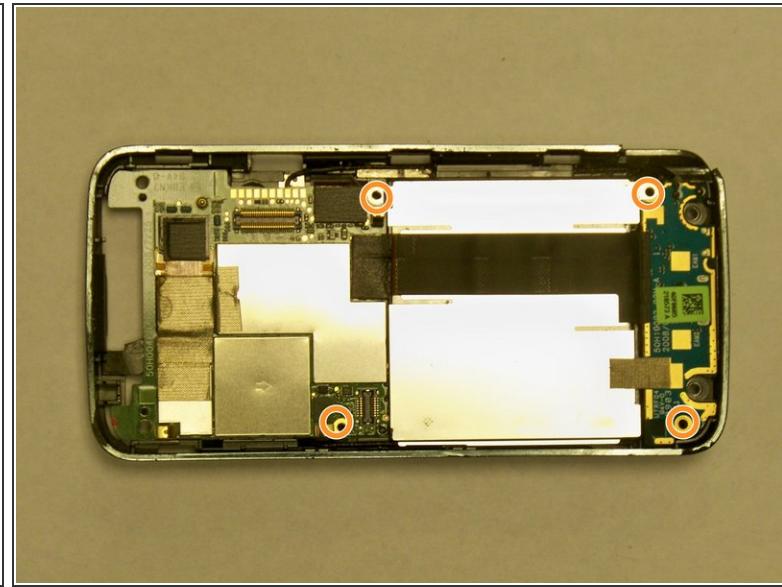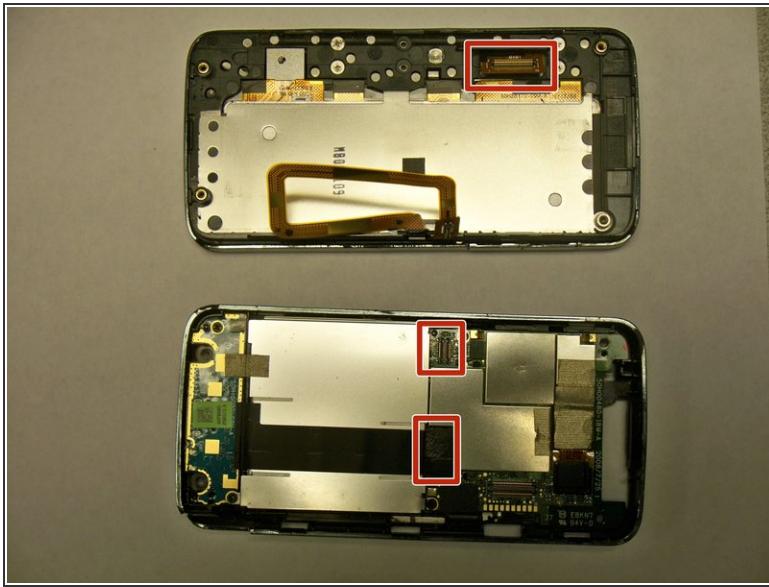

- Gently unplug the connectors.
- Remove the screws with a 00 Phillips-head screwdriver.


Step 8

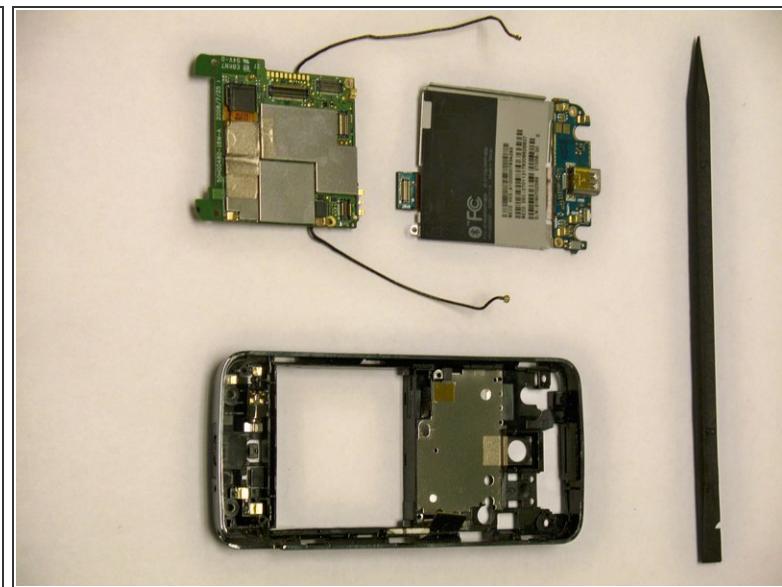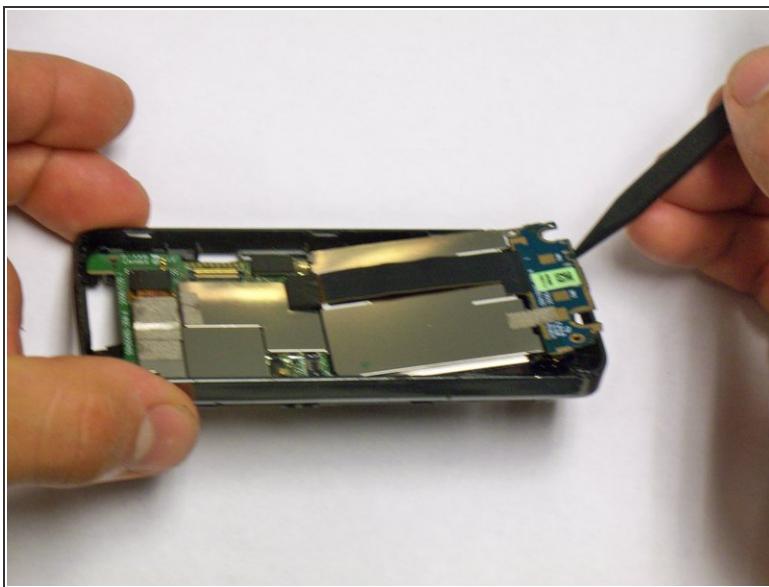

- Gently lift the motherboard up using a nylon spudger.

⚠ BE AWARE OF THE ANTENNA.

Step 9 — Keyboard

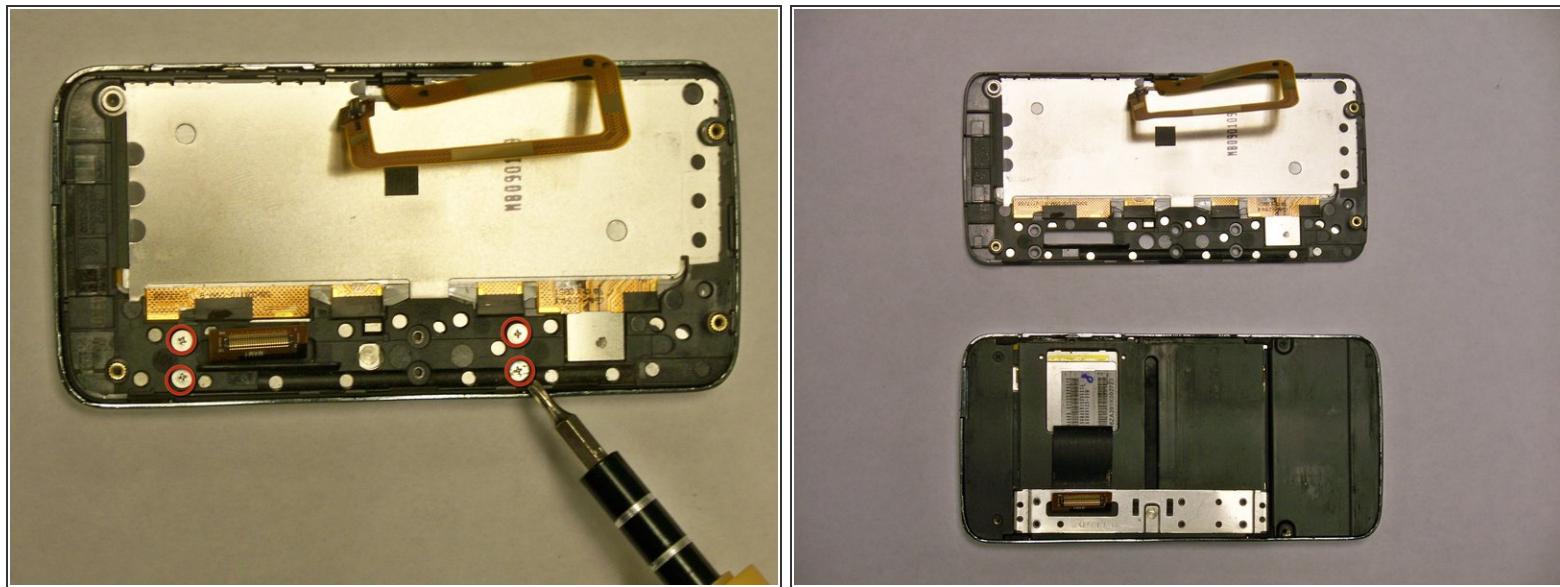

- Remove the 4 screws circled in red using a 00 Phillips-head screwdriver.

To reassemble your device, follow these instructions in reverse order.