




# Hamilton Beach 48464 Tubing Replacement

This guide will show how to access the tubing that guides the flow of water around the Brew Station. This is important to be able to do if you have an obstruction that is impacting the flow of water.

Written By: Michael Damico

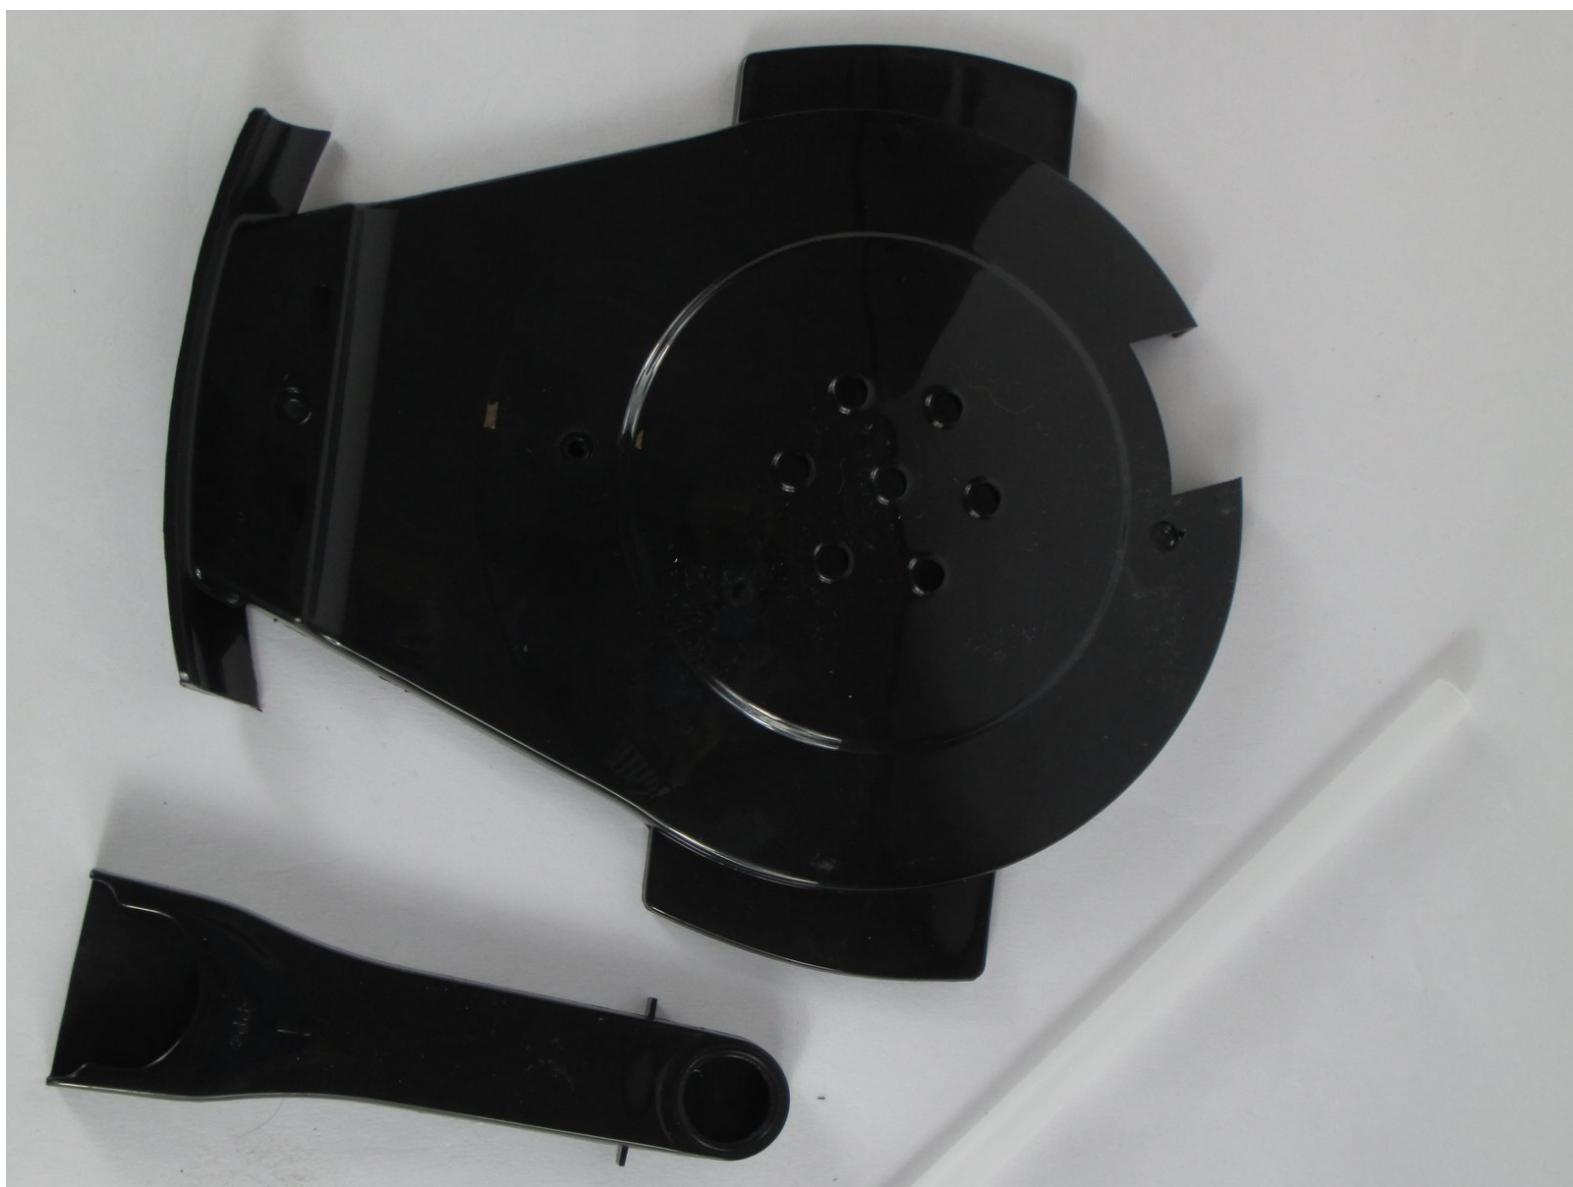

## INTRODUCTION

This guide shows you how to remove the tubing found inside the Brew Station. This is helpful when you want to replace it for a cleaner tube. Tweezers for the removal of the tube is highly suggested.

### TOOLS:

- [Tweezers \(1\)](#)
- [Phillips #2 Screwdriver \(1\)](#)

## Step 1 — Filter Basket



- Carefully open the top lid of the Brew Station.

## Step 2



- Slide out the filter basket that is sitting on top after opening the lid.

## Step 3 — Tubing



- Using the Philips 2 Screwdriver, unscrew the two 8-mm screws labeled in a red outline.
- Once screws are removed, pull off the little circle piece.

## Step 4



- Using tweezers, grab the tube that is exposed after you pulled the piece off in step 1 and pull it up and out of the Brew Station.

## Step 5



- Using the Philips 2 Screwdriver, unscrew the three 8-mm screws labeled in a red outline.
- Once screws are removed, gently pull off the liner that is on the inside of the lid.

## Step 6



- After completing Step 3, you will be exposed to a little piece attached to the inside of the lid. Pull this piece out, as it is the last piece of tubing used in the Brew Station.

To reassemble your device, follow these instructions in reverse order.