



KPN Arizona Comfort Replacement

This is a step-by-step guide to fix the speaker of your KPN Arizona Comfort.

Written By: Maite



INTRODUCTION

The chosen product is the KPN Arizona Comfort phone. This repair manual guides you step by step through the repair of the speaker of the KPN Arizona Comfort phone. This is a easy guide and will take approximately 30 minutes. At the end of this guide you will be able to repair the speaker of your phone by replacing the component. Something that might be challenging is that you have to put a lot of effort for some parts.

In the inner part of the product might not be sturdy so you could break apart when taking the device apart.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #1 Screwdriver](#) (1)
- [Soldering Iron](#) (1)

Step 1 — KPN Arizona Comfort



- Hold the phone with one hand and apply a slight pressure on the battery lid with your other hand.
- Now you can slide open the battery lid.

Step 2



- Lift out both batteries with a prying movement.

Step 3



- Remove the following two Phillips #00 screws securing the back casing to the front.


Step 4



- Use the plastic opening tool to pry the front from the backside.
- Start prying at the bottom and work your way around the device.
- Do this for every 3 cm all around.


(i) If you apply too much pressure or use a sharp tool, this might damage the casing.

Step 5

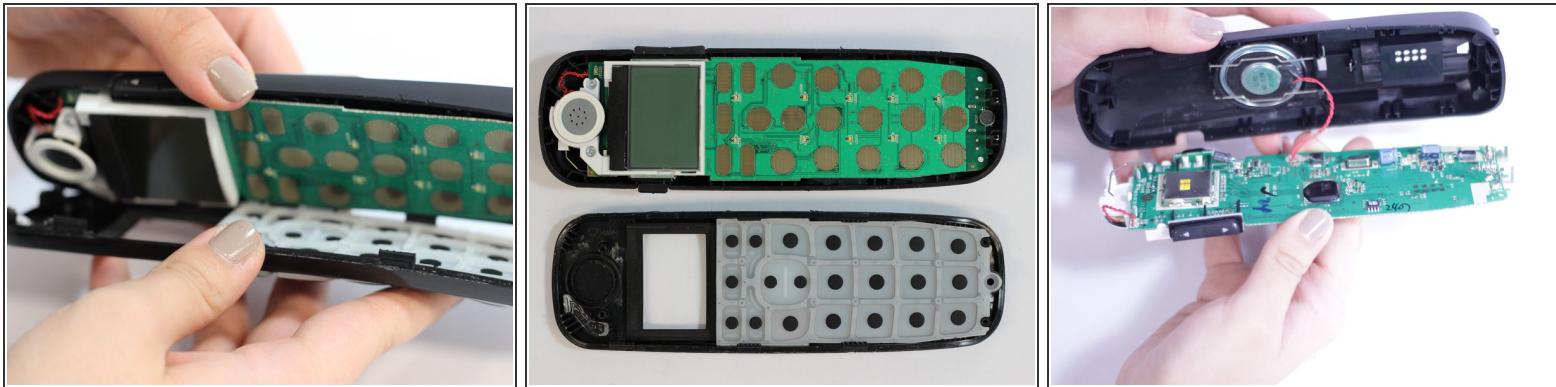



- Flip the circuit board from the backside of the phone to the frontside of the phone by tilting it on the long edge
- *(i)* Make sure you do this gesture slowly and gently so the wires will not detach.

Step 6

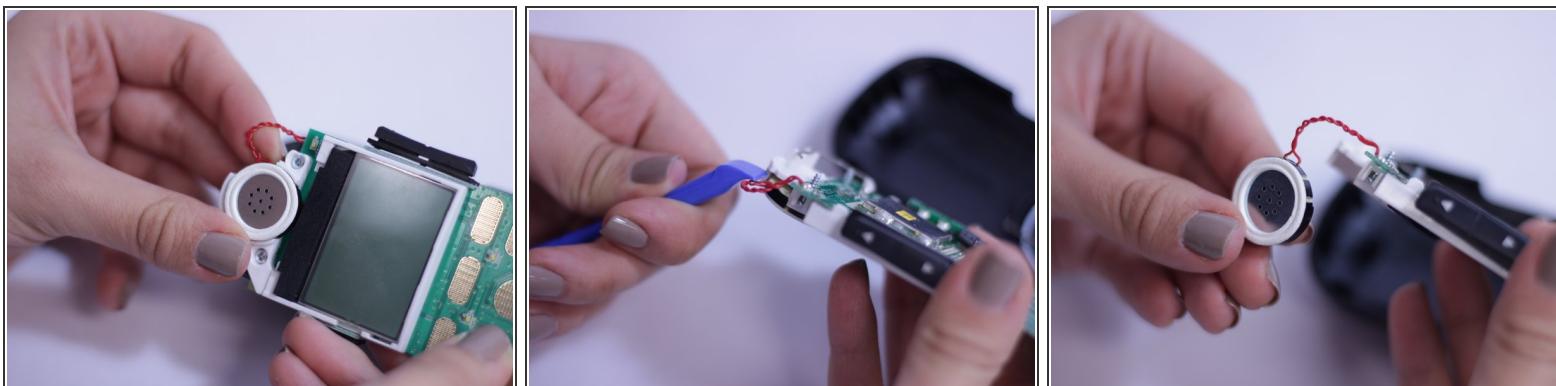


- You are now facing the back side. Apply a little bit of pressure with the plastic opening tool on the back of the speaker so the the speaker can pop out.
- *(i)* The speaker is still attached with a wire, do not pull this.

Step 7

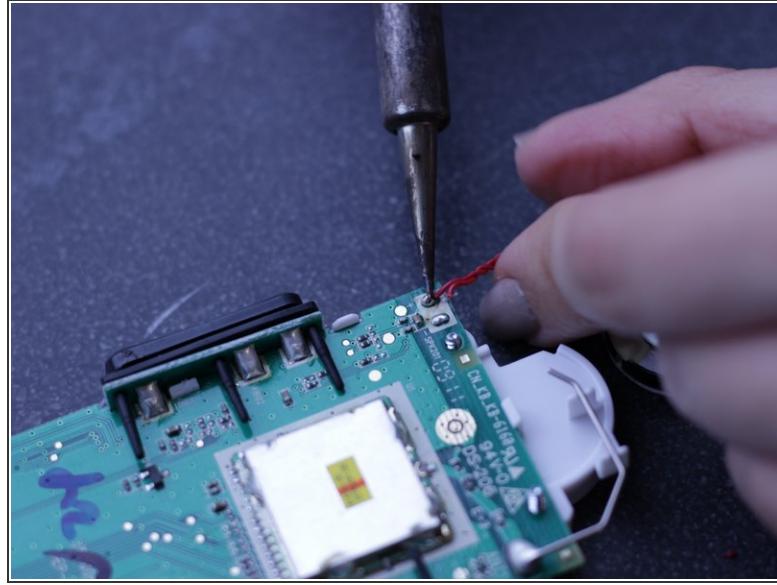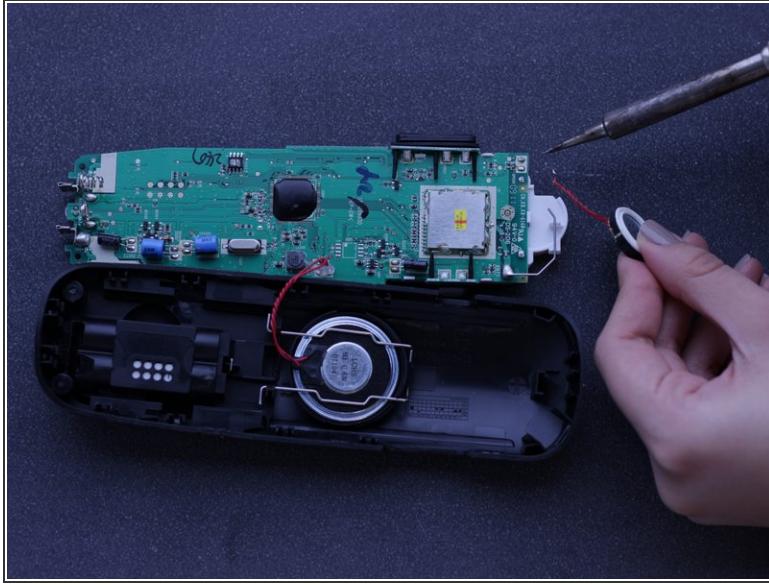

- Use a soldering iron to heat up the solder connected to the electric wire.
- When the solder is fluid, carefully pull the electric wire loose.

Step 8

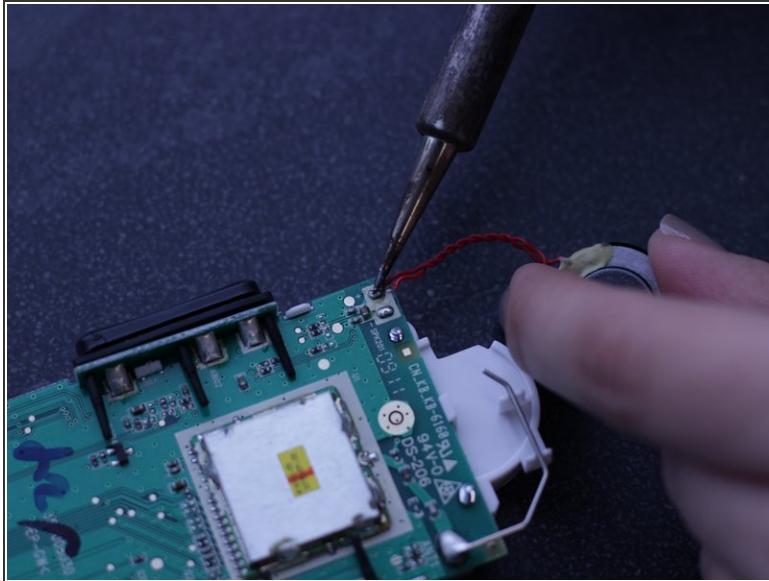

- Replace the broken speaker of the phone and solder it back in place.

To reassemble your device, follow these instructions from step 6 in reverse order.