



LG CG180 Keypad Replacement

Written By: Alex Jacobs



INTRODUCTION

How to remove the keypad from an LG CG180 cell phone.

TOOLS:

- Fingers (1)
- Phillips #00 Screwdriver (1)
- iFixit Opening Tools (1)

Step 1 — Battery




- Power down the cell phone by pressing and holding down the red "end call" button.

Step 2



- Turn the phone screen-down so you are looking at the back cover.

Step 3

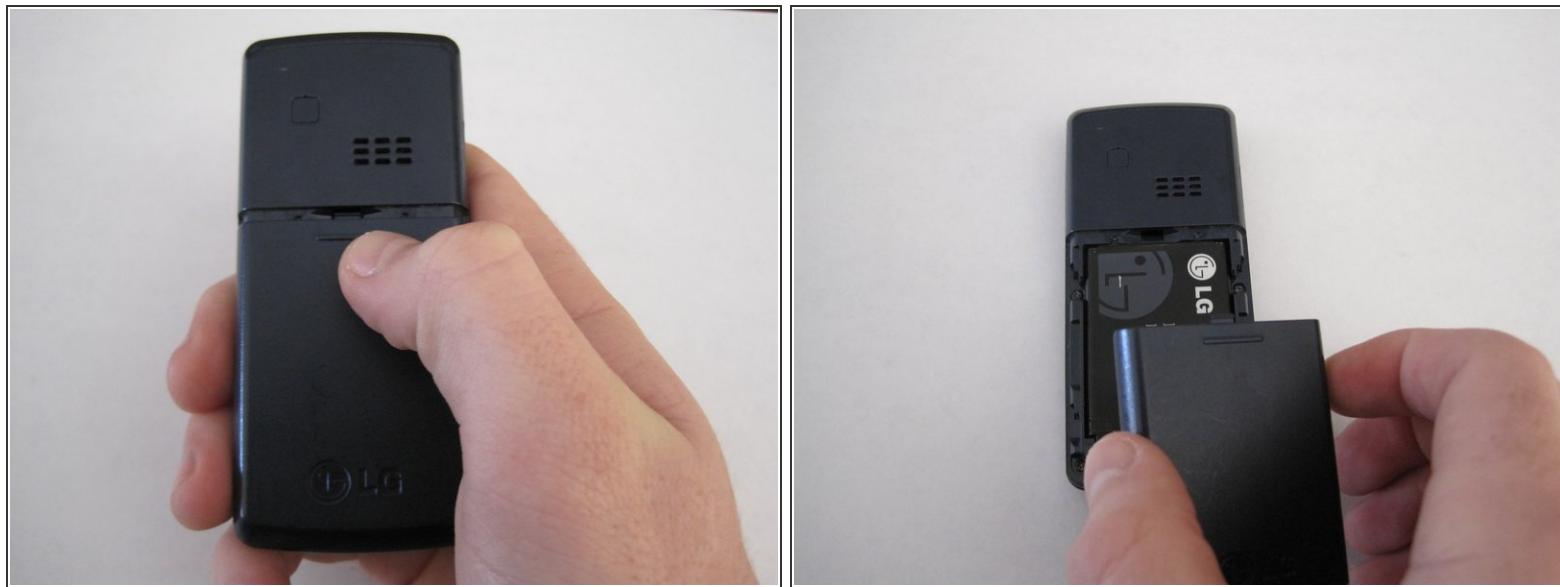

- Slide the back cover down using your finger to remove the cover from the phone.

Step 4



- Place your finger at the top of the battery in small gap.

Step 5




- Press downward while pulling outward to remove the battery.

Step 6 — Hardshell Case




- Remove all four screws on the back of the phone using a Phillips #00 screwdriver.

Step 7

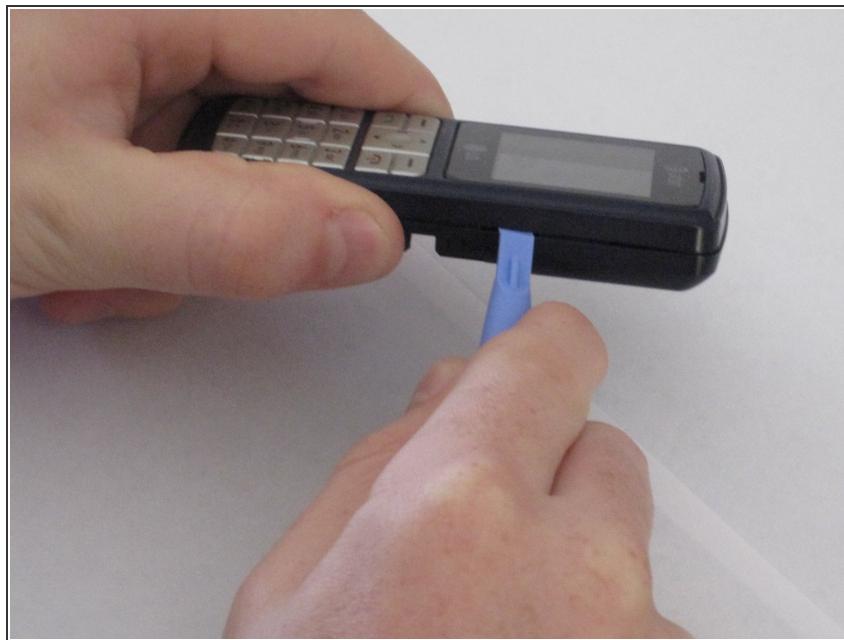



- Insert a plastic opening tool in the seam.

Step 8

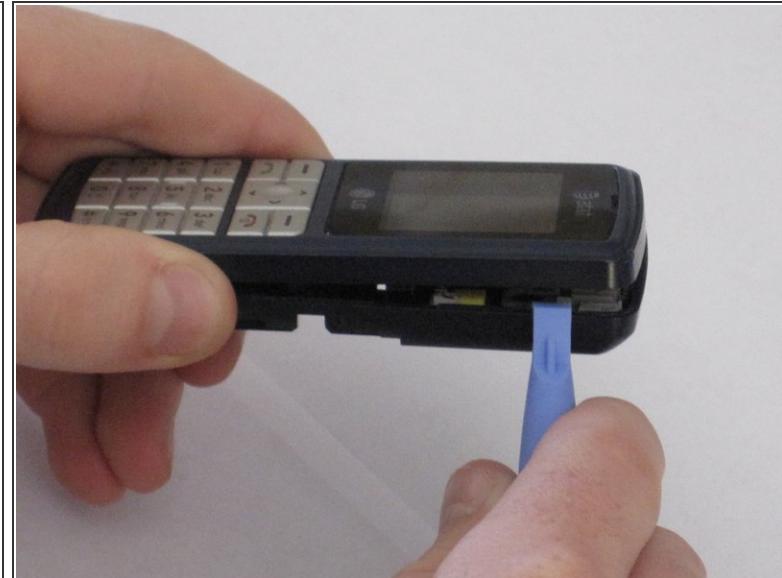

- Run the tool along the seam to release all the tabs.

Step 9

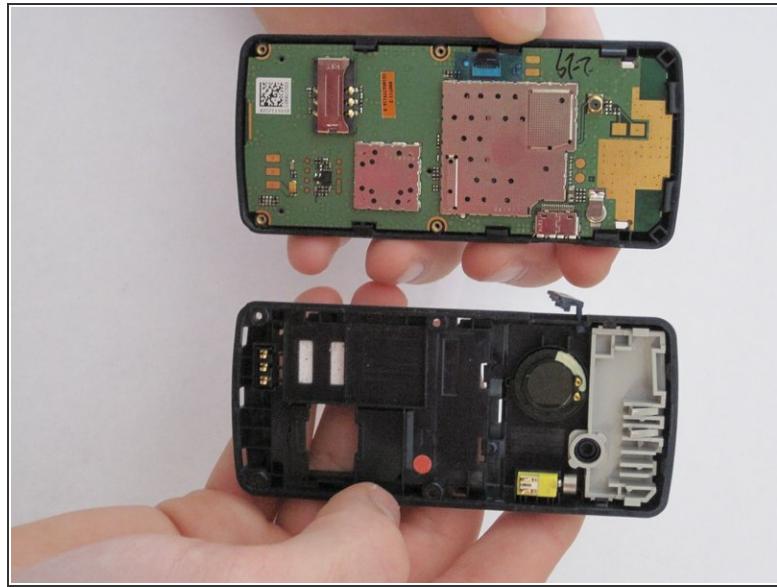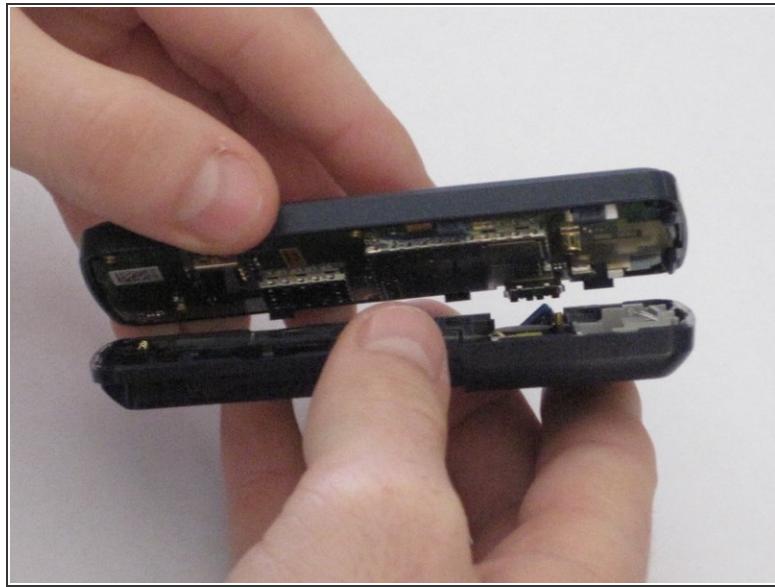

- Pull the phone back cover off once all the tabs are released.

Step 10




- Push the contents of the phone away from the hardshell case by applying pressure to the keypad with both thumbs.

Step 11



- The hardshell case is separated from the rest of the phone.

Step 12 — Keypad

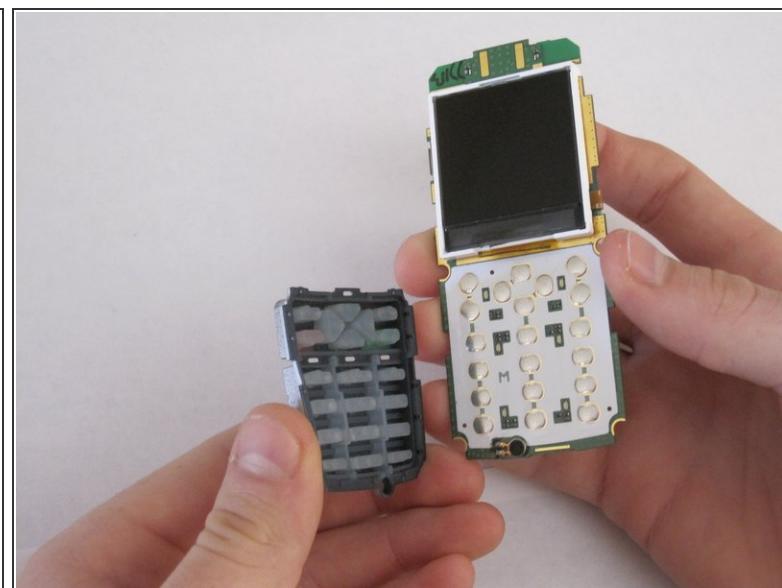

- Separate keypad from circuit board by turning it upside down and allowing it to fall off.

To reassemble your device, follow these instructions in reverse order.