



LG VX6000 Keyboard Replacement

Written By: Adam Altman



INTRODUCTION

The following guide if for removing or replacing the keyboard on the LGVX6000.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)



PARTS:

- [LGVX6000 Keyboard](#) (1)

Step 1 — Battery



- Locate the dark gray tab on the back of the phone towards the top. Push the tab towards the top of the phone to release the battery.

Step 2



- ⓘ Remove the battery by lifting up and rotating the battery away from the bottom edge.

Step 3 — Body




- Pull out the two rubber cushions located on the top of the phone using tweezers.
- ⓘ Only remove the two cushions that are circled!

Step 4



- Unscrew the six screws seen on the back using a Phillips 00 Screwdriver.
- Remove screws and carefully place on an uncluttered surface or in a small container.

Step 5

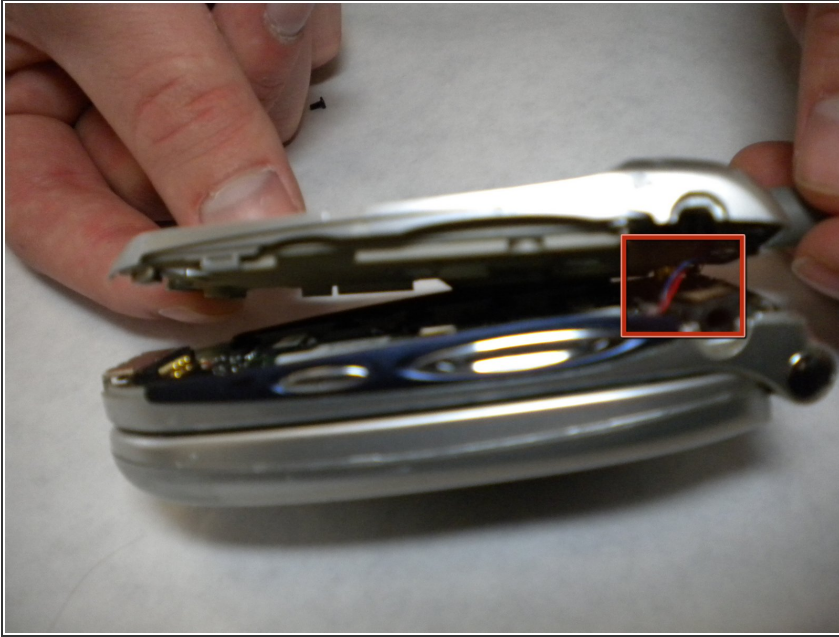


- Carefully remove the back of the phone gently using your fingernails or tweezers.

⚠ There are a pair of red and blue wires that plugs into the motherboard. These wires will snap if you force the pieces apart.

★ To reattach the back, you must plug these wires back in.


Step 6 — Logic Board

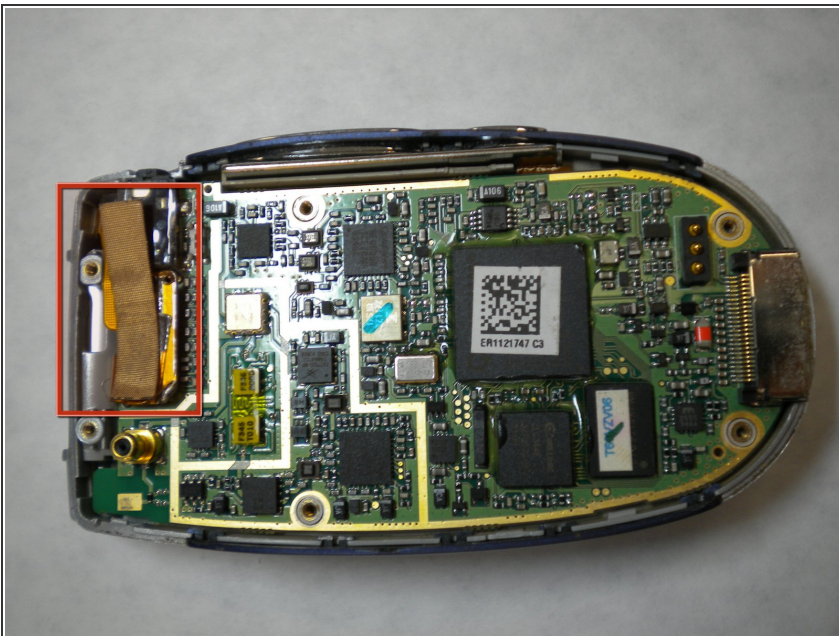

- Carefully peel off the adhesive tab as shown in the photo


⚠ The tab should not fully separate from the phone.

Step 7

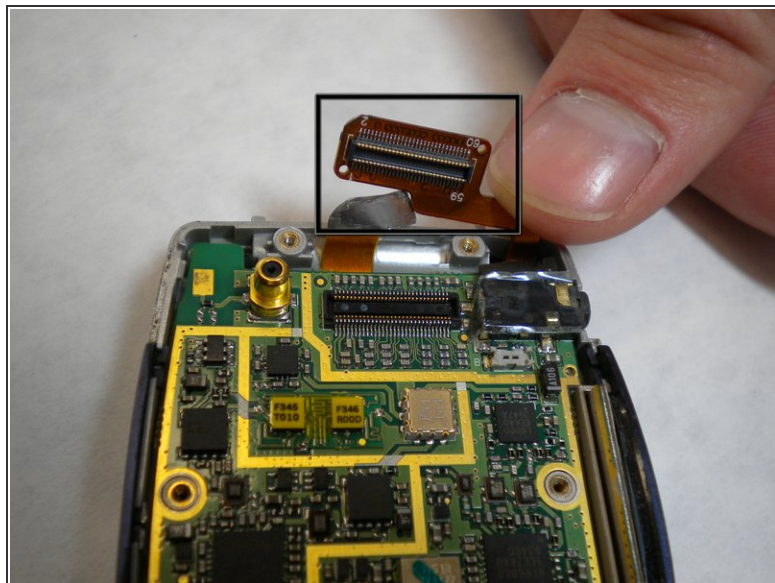


- Locate the yellow connection towards the top of the phone. This is directly connected to the screen.
 - Remove the connector by carefully prying it away from the motherboard and lifting it away from the phone
- ⚠ Do not pull too hard on the connector.

Step 8

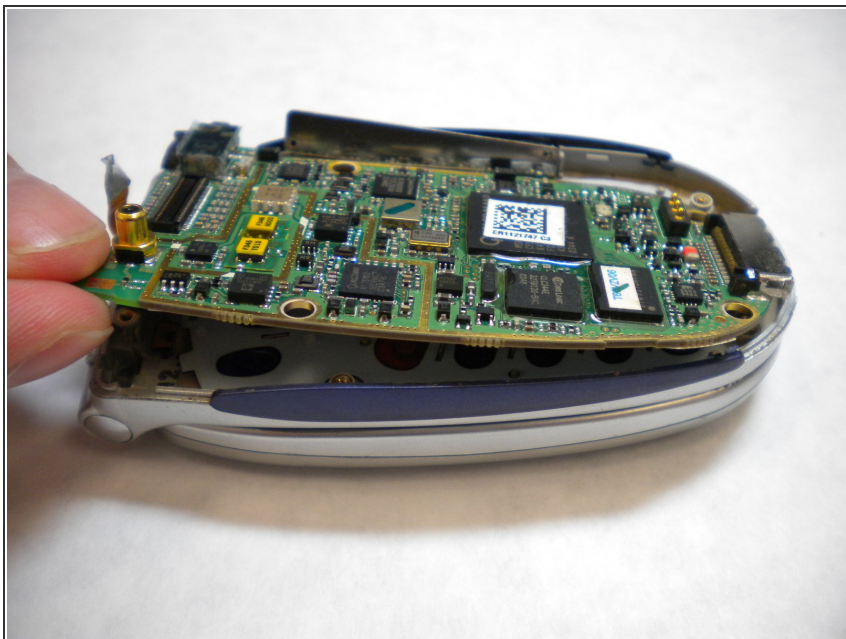

- Gently lift a corner of the motherboard away from the casing to remove.

Step 9 — Keyboard

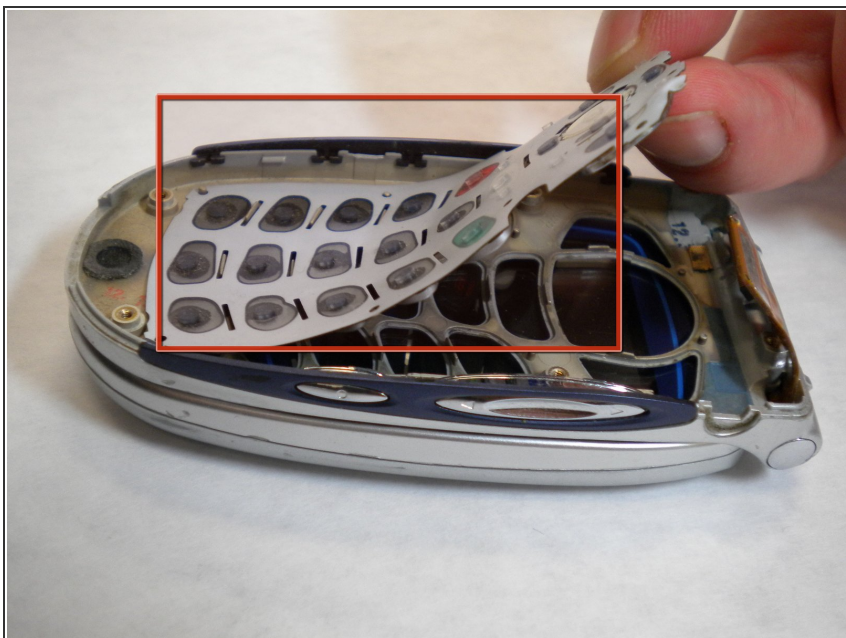

- Peel the white keypad off the casing.

To reassemble your device, follow these instructions in reverse order.