



# LG VX8350 Repair Keypad Removal

This guide is for the removal of the keypad.

Written By: James Brandon



## INTRODUCTION

This guide will teach someone how to properly dismantle the phone to a point where the keypad is accessible, and then to remove the keypad.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #0 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Tweezers](#) (1)

## Step 1 — Battery



- Locate the horizontal grip located on the back cover of the phone.
- Slide the back cover down and off of the phone.

## Step 2



- Insert a plastic opening tool into the battery release point located above the battery.
- Pull outwards in order to release the battery.

## Step 3 — Circuit Board Housing




- Locate the 5 screws holding the body of the phone together.
- The top screw will have a plastic cover, remove it using tweezers.
- Using a Philips head screwdriver, twist counterclockwise to remove the screws.
- Take special care with the screw located at the top of the phone. It is smaller and more likely to be damaged or improperly attached.

## Step 4




- Lift the back cover starting at the bottom of the phone.

## Step 5

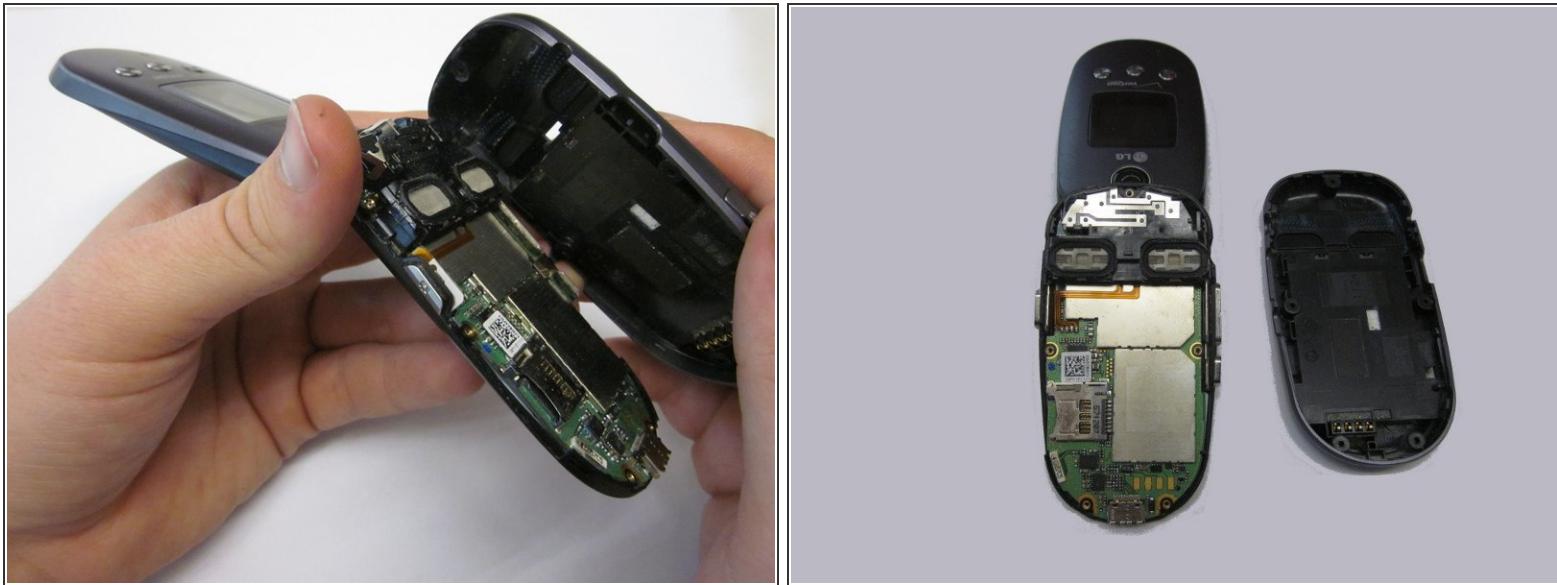


- Remove the back cover completely from the phone.

## Step 6 — Circuit Board

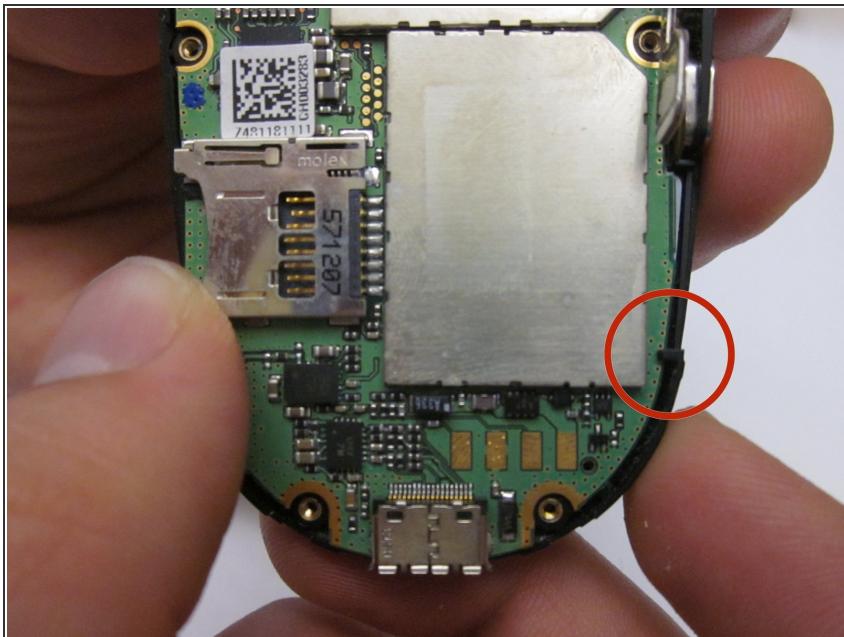



- Locate the clamp at bottom right side of the Circuit Board.
- Pull the circuit board from the phone being cautious to pull out underneath the clamp.

## Step 7

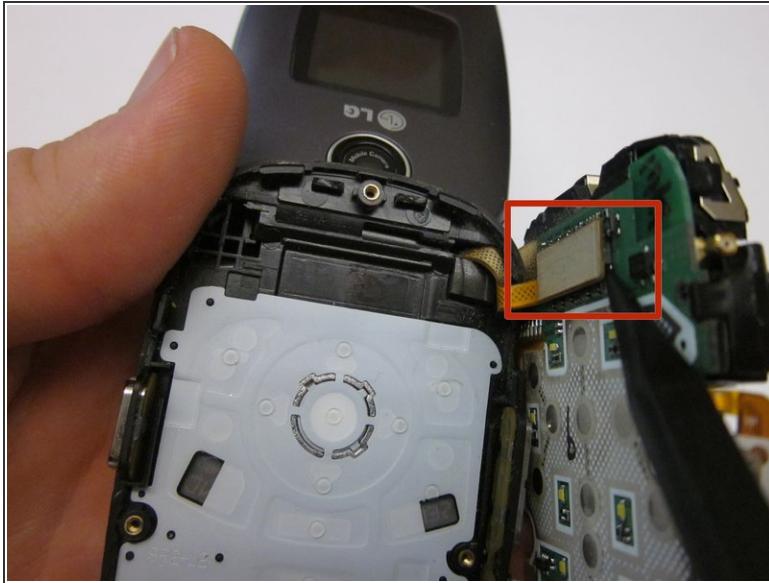

- Locate the ribbon connecting the circuit board to the phone display.
- Using the spudger, disconnect the ribbon connecting the phone's display and the circuit board.
- Remove the circuit board

## Step 8 — Keypad

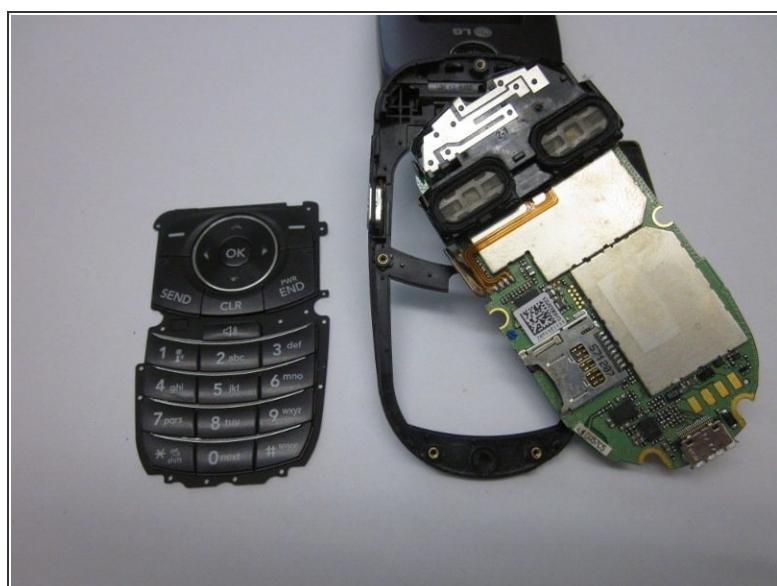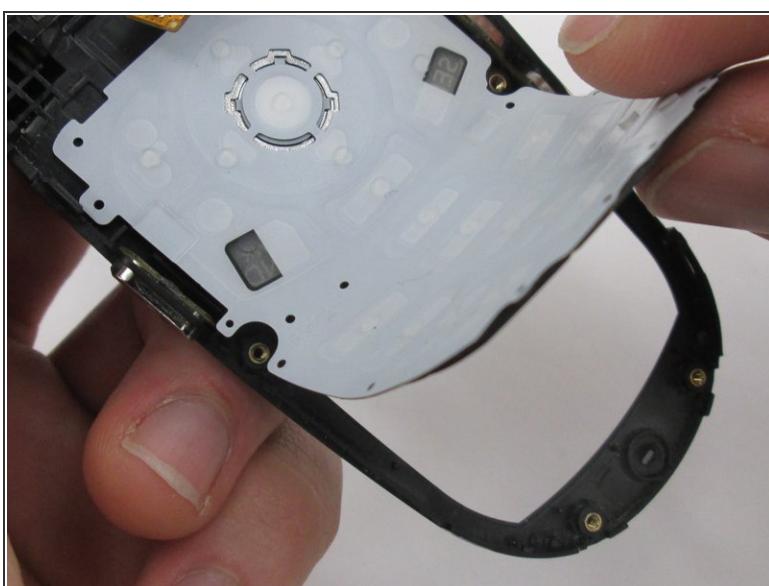

- Lift the keyboard and remove it from the phone.

This document was generated on 2019-10-27 10:28:31 PM (MST).

To reassemble your device, follow these instructions in reverse order.