




Lenovo Yoga 710-14IKB Trackpad Replacement

Guide to replace the trackpad of your Lenovo Yoga 710-14IKB.

Written By: Chuefeng Vang

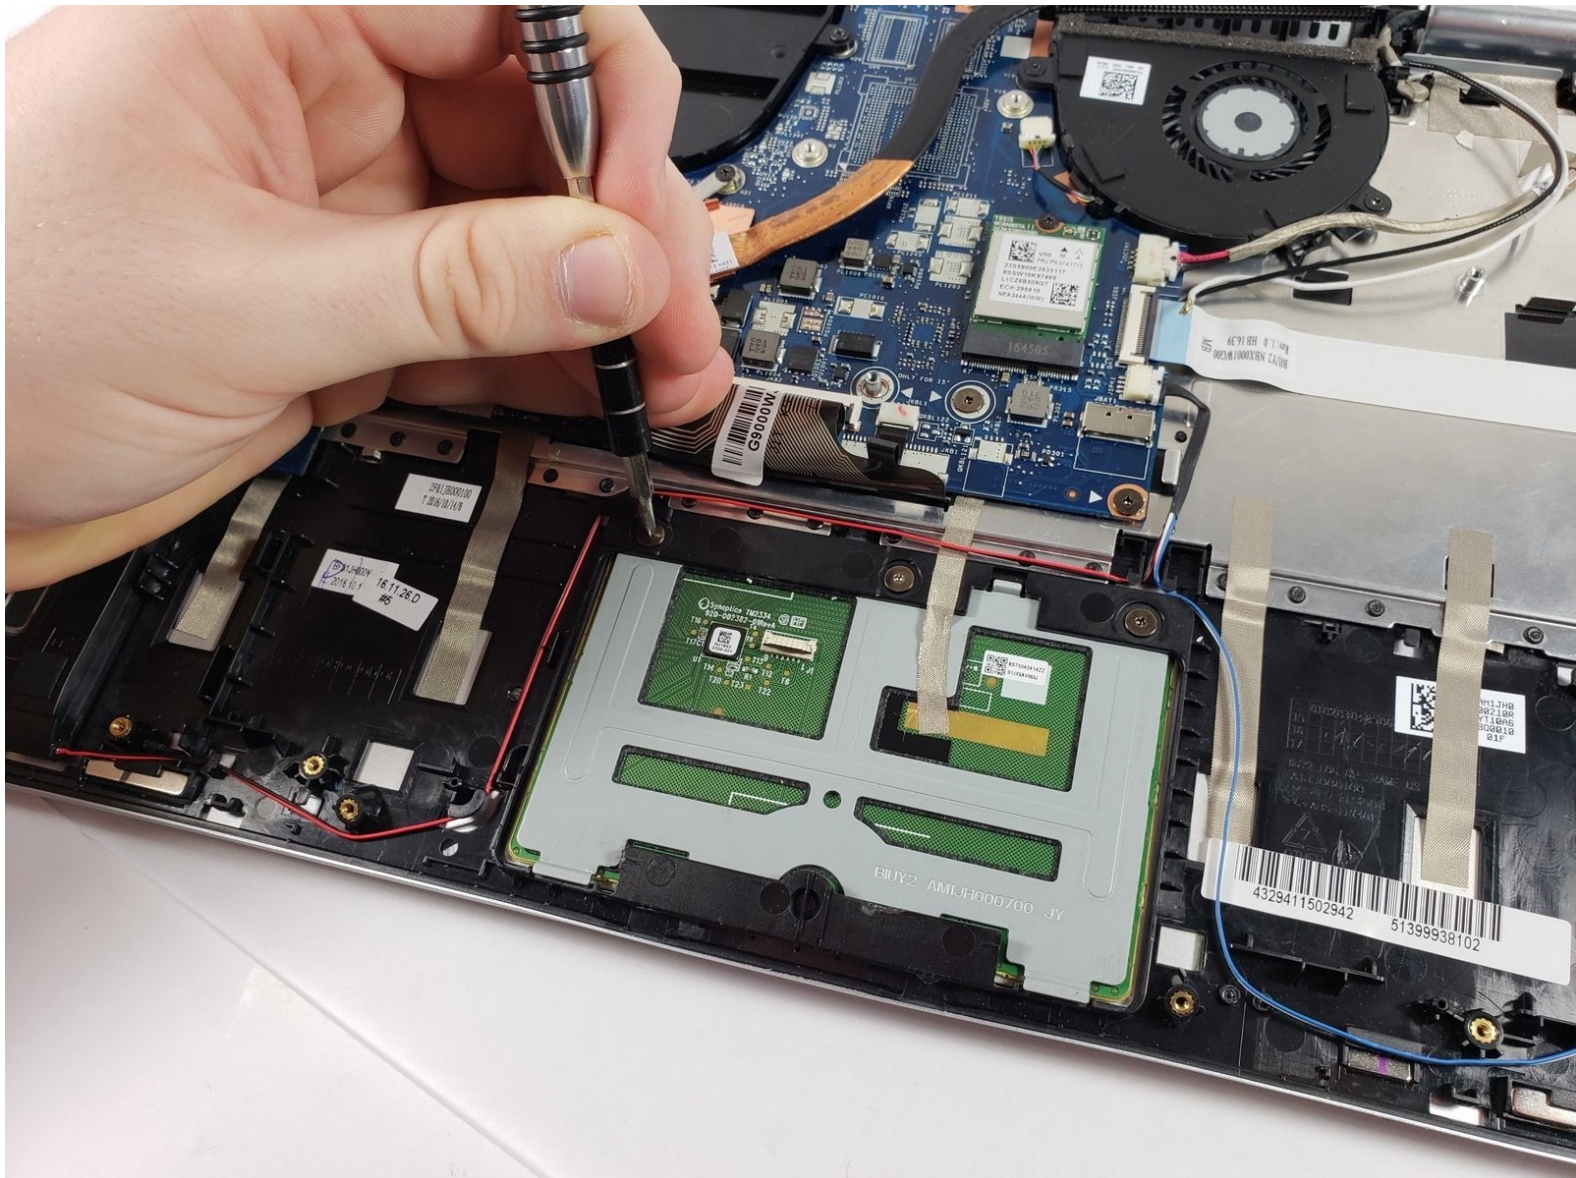

INTRODUCTION


This guide will teach you to remove and replace your trackpad.




TOOLS:

- [T4 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [JIS #1](#) (1)
-


Step 1 — Back Cover

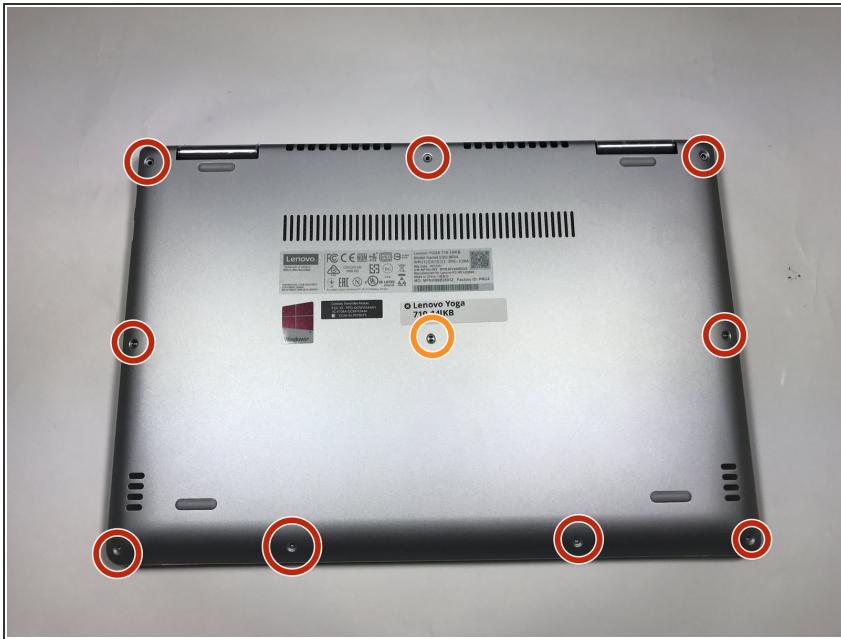

 Ensure your device is completely OFF before starting this guide.

- Use a Torx T4 screwdriver to unscrew the nine 5 mm screws holding the cover in place.


- Use a Torx T4 screwdriver to unscrew the 8 mm screw in the center.

 When reassembling, make sure not to tighten the screws too much or you may risk cracking the plastic cover.

Step 2



- Use the plastic opening tool to pry the cover up and away from the laptop, starting at one end and working your way around the cover.

 The cover is large and flat and made of thin plastic. It cracks easily, so make sure not to pry too hard.

Step 3 — Battery



- Use a Phillips #00 screwdriver to remove the four 3 mm screws holding the battery in place.
- ⓘ Be careful not to cross-thread the screws. Also, don't let the screws fall down into the laptop case.

Step 4




- Lift the battery connector straight up away from the board using your fingers or an opening tool.

Step 5




- Remove the battery.

Step 6 — Trackpad

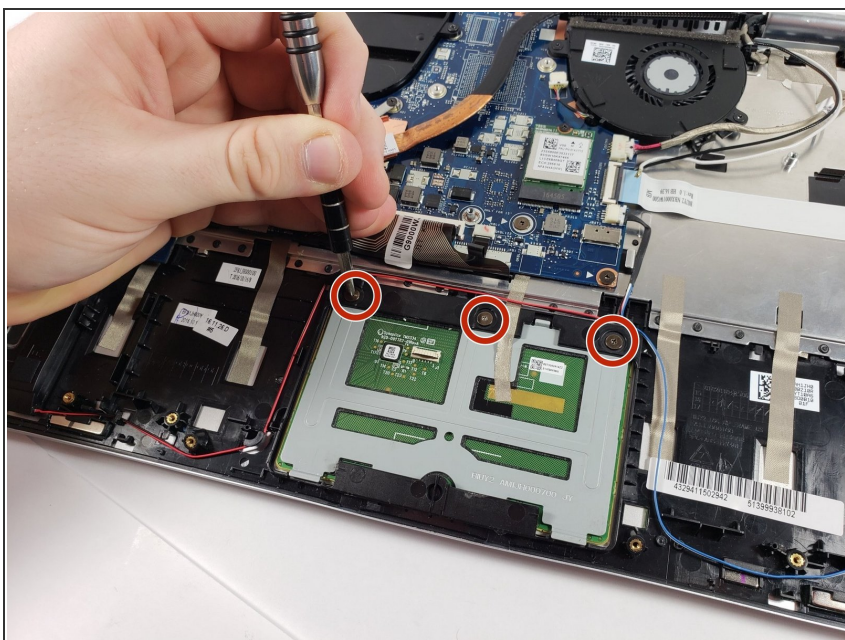

- Use the Phillips #1 screwdriver to take off the three 3mm screws.


Step 7

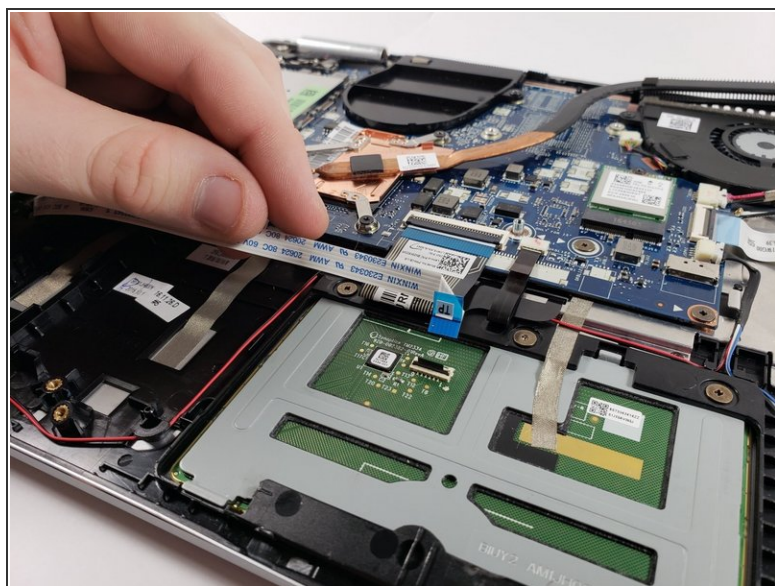

- Grip the blue tab and pull out.

⚠ Careful to not pull too hard, there is a chance of damaging the tab.

Step 8

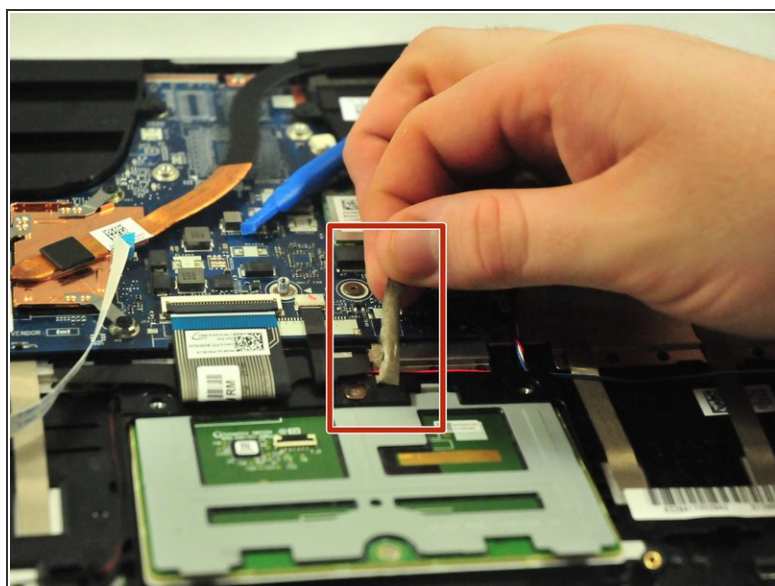

- Lift off the layer of tape from the trackpad.

Step 9



- Push out the trackpad.

To reassemble your device, follow these instructions in reverse order.