




# Lenovo Yoga Tab 3 10 Wifi Module Replacement

Replace your wifi module so that the device can connect properly.

Written By: Phanudej

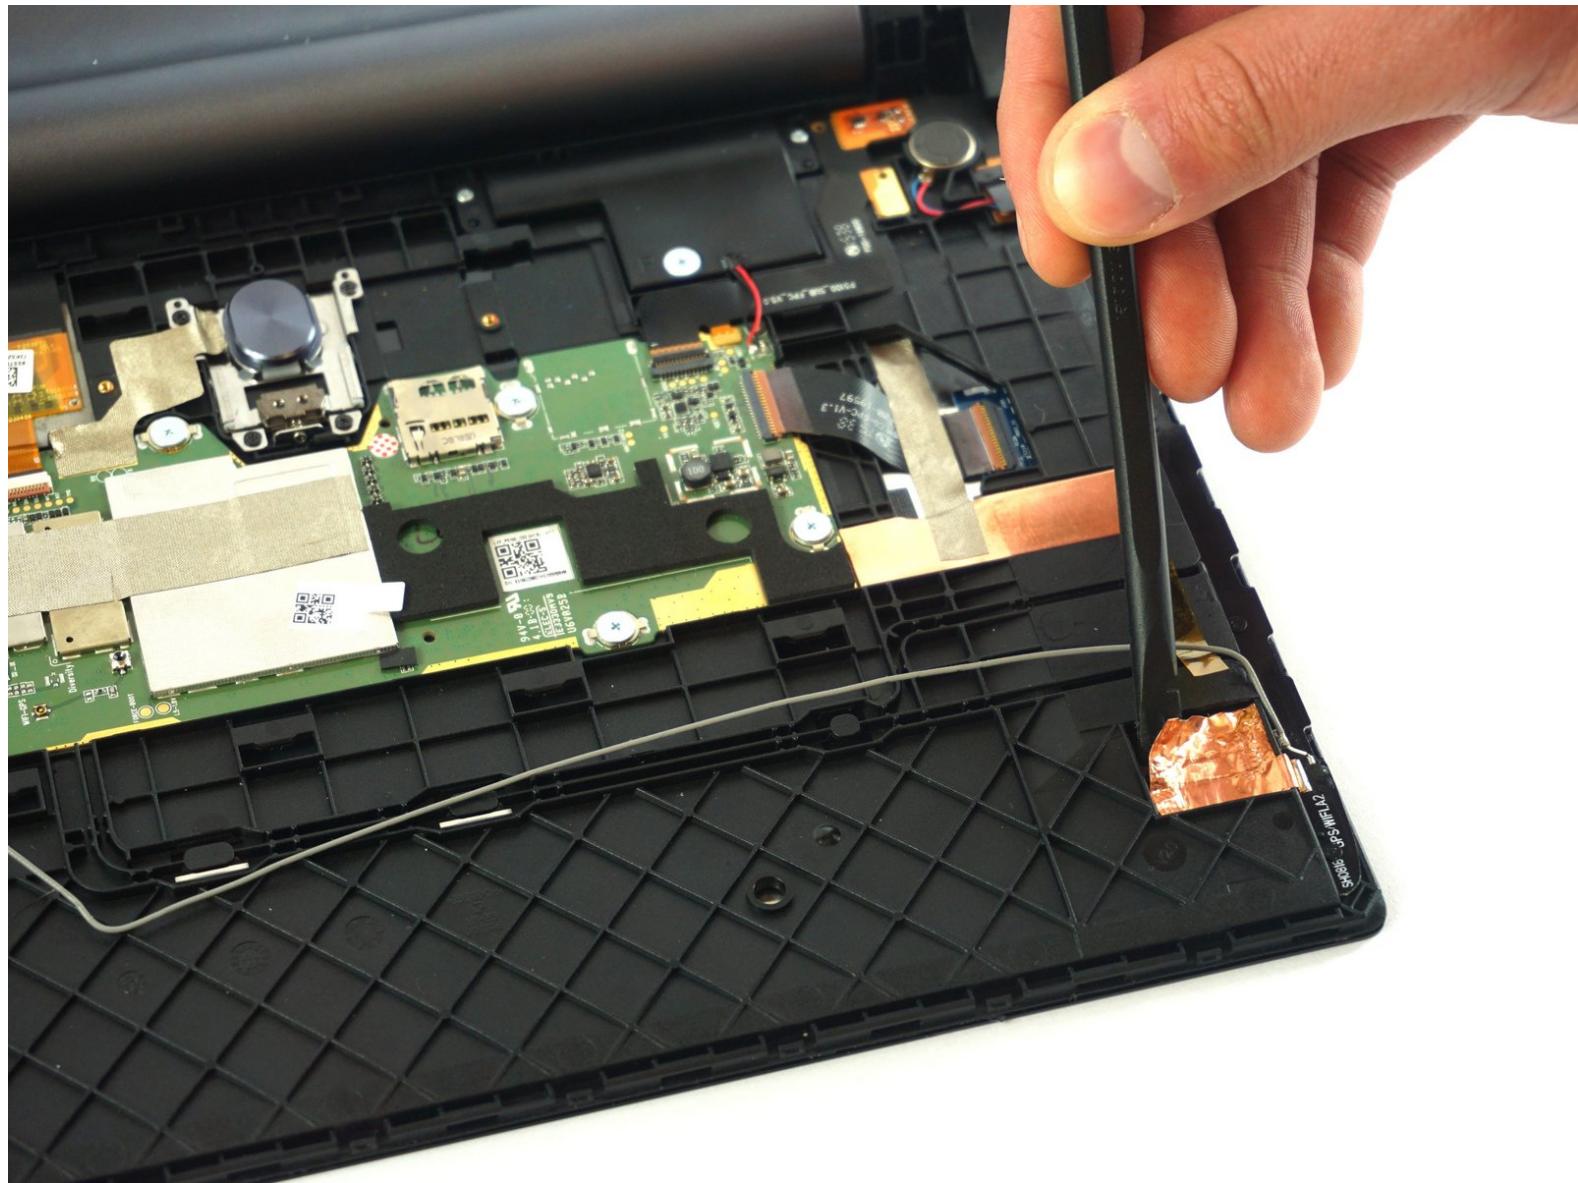

# INTRODUCTION

Use this guide to replace your wifi module

## TOOLS:

- [Tweezers \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)

## Step 1 — Back Cover



- Open the built-in kickstand.

## Step 2



- Remove the sticker located directly under the the built-in kickstand to reveal two 0.75 mm screws.
- Remove the microSD card slot cover. Remove any microSD card (if inserted).
- Using a Phillips head screwdriver, remove the three 0.75 mm screws.

## Step 3



- Orient the device so the screen is facing you.
- Carefully insert the spudger along the seam between the screen and back cover and gently separate the back cover from the device frame.
- Continue to detach the backplate from the frame by moving the spudger around the perimeter.


***i*** Some force will be required to detach the small plastic braces securing the backplate to the device.

## Step 4 — Wifi Module




- Use the nylon spudger to gently lift the foil cover of the wifi model.

## Step 5

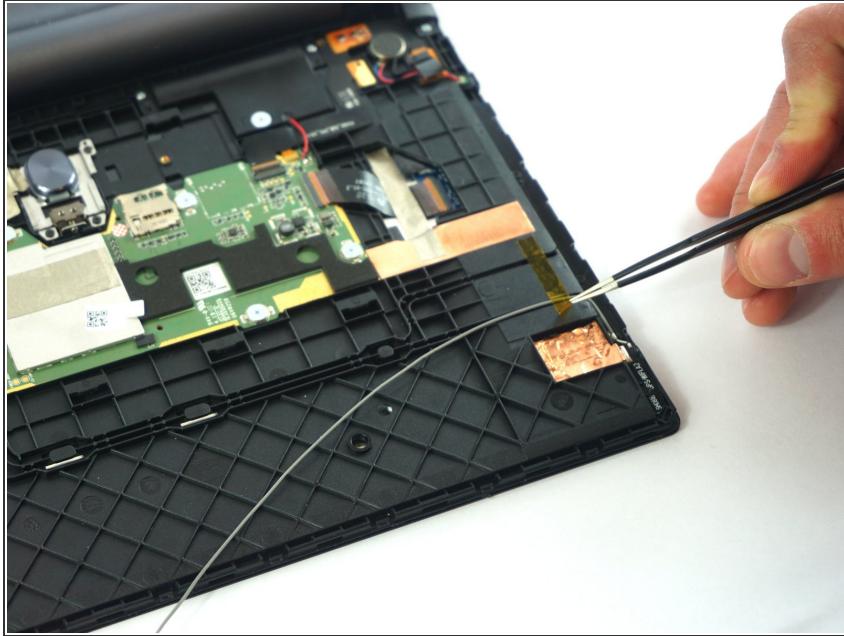


- Use tweezers to gently lift the gold tape located above the copper foil.

## Step 6

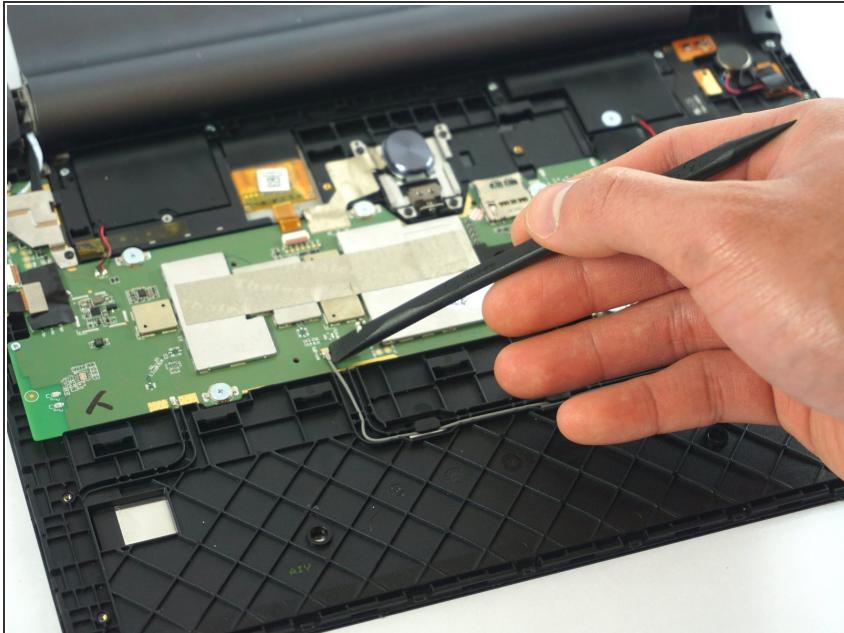

- Use the plastic spudger to disconnect the wifi module connector from the motherboard.

## Step 7

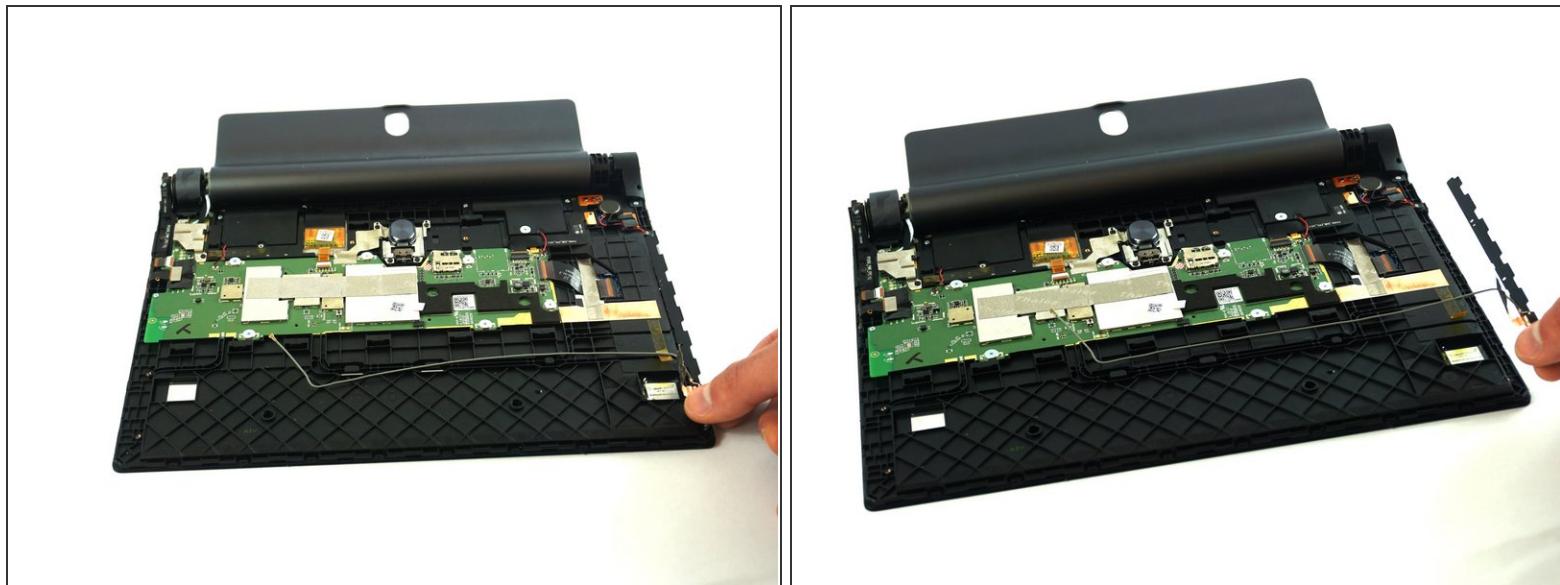

- Carefully lift the wifi module from the device.

To reassemble your device, follow these instructions in reverse order.