



# MaxWest TAB-7360DC Battery Replacement

This guide will demonstrate how to safely replace your battery of your tablet.


Written By: Gillian Bundles



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Soldering Iron \(1\)](#)
- [grounding strap \(1\)](#)

## Step 1 — Back Hard Case

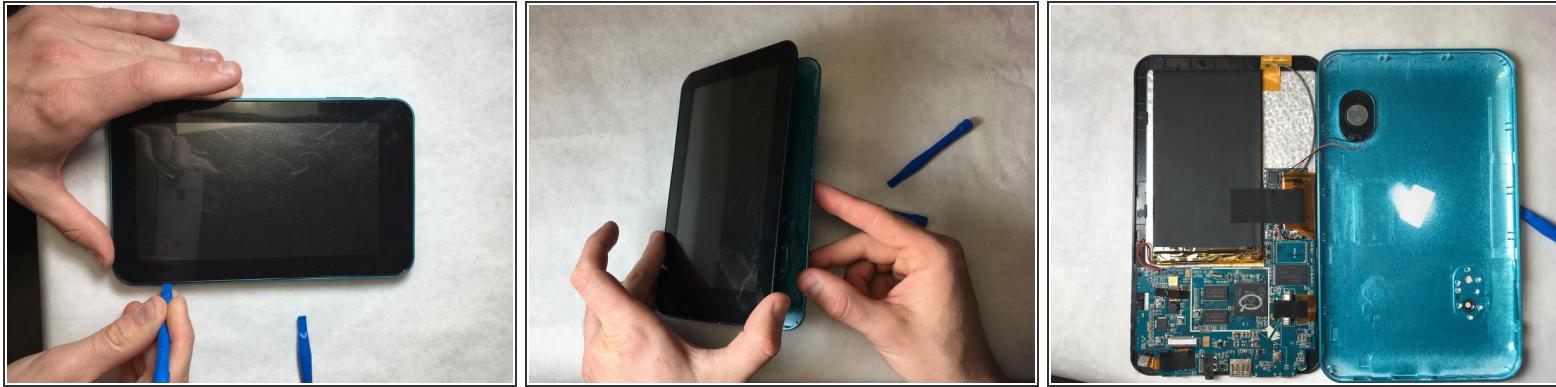


- Insert plastic opening tool at the corner of the screen, in between the back case and the front.
- Volume buttons will fall out during removal.
- When opening up the case, have the I/O ports facing you and turn the back case towards the right. There is a short wire connecting the speaker to the logic board.

## Step 2



- Carefully pry the tape from the battery, the bottom left chip, and the ribbon cable towards the bottom-right of the board. The bottom left has a little silver square component that must also be unclipped and untaped.
- The battery is glued to the back of the screen; therefore pull the battery off of the back with caution. There will be resistance but that's okay.

## Step 3

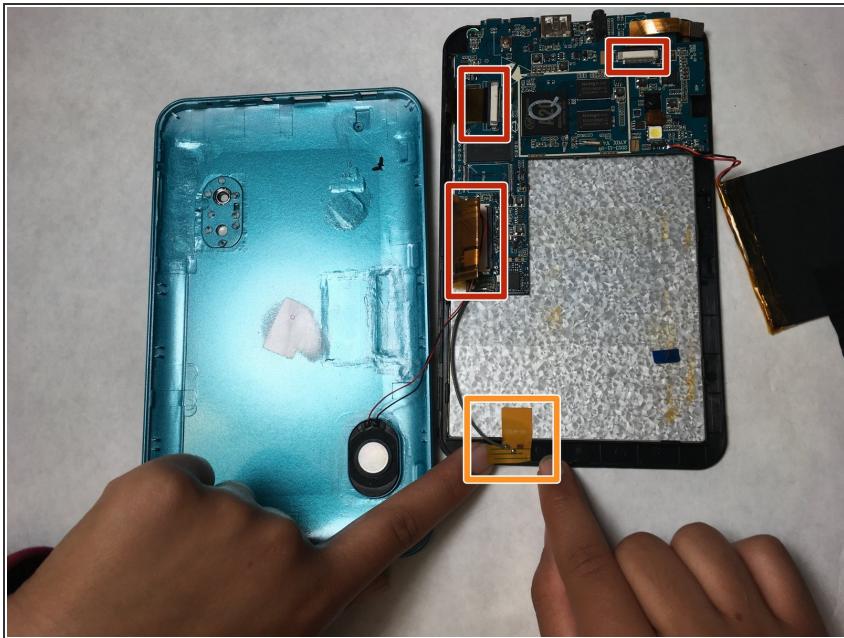


- Gently unclip the data cable retainers and remove the wires from the junctions.
- Peel the tape off the wire near the bottom of the case.

## Step 4



- Remove the two 4mm screws (circled in orange) with a 00 Phillips head driver.
- Unclip the black plastic retainer near the data port. The PCB should now be able to be gently pulled off.

## Step 5

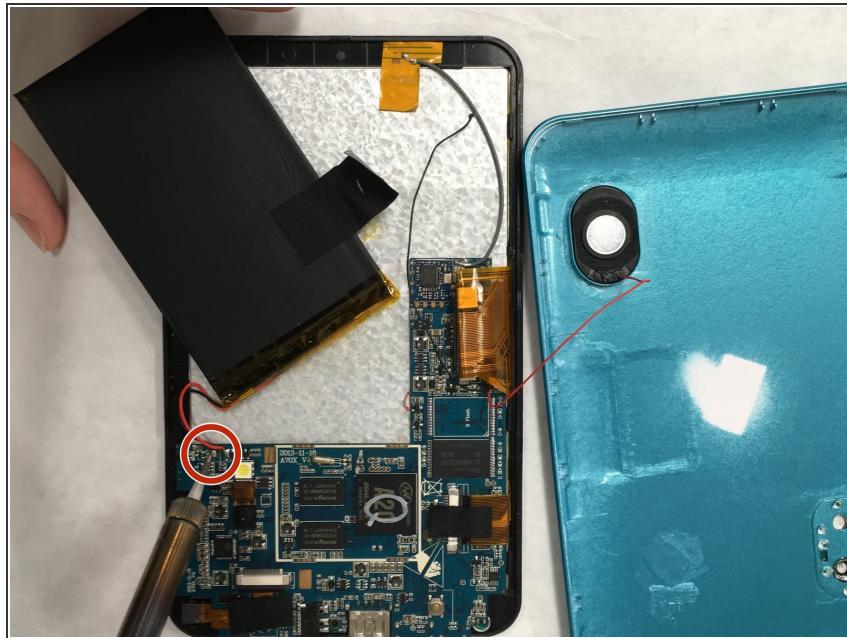

- Make contact with the battery terminals with the hot tip of the soldering iron for a few seconds while slowly pulling the wire away.

**⚠ DO NOT TOUCH BOTH THE BLACK AND RED LEADS AT THE SAME TIME WITH THE SOLDERING IRON**

To reassemble your device, follow these instructions in reverse order.