




Monster Soundstage S2 Front Speakers Replacement

This guide provides directions for the replacement of the front speakers for the Soundstage S2. These speakers are 8 ohm, 15 watt drivers (left and right).

Written By: Josue A Melgar

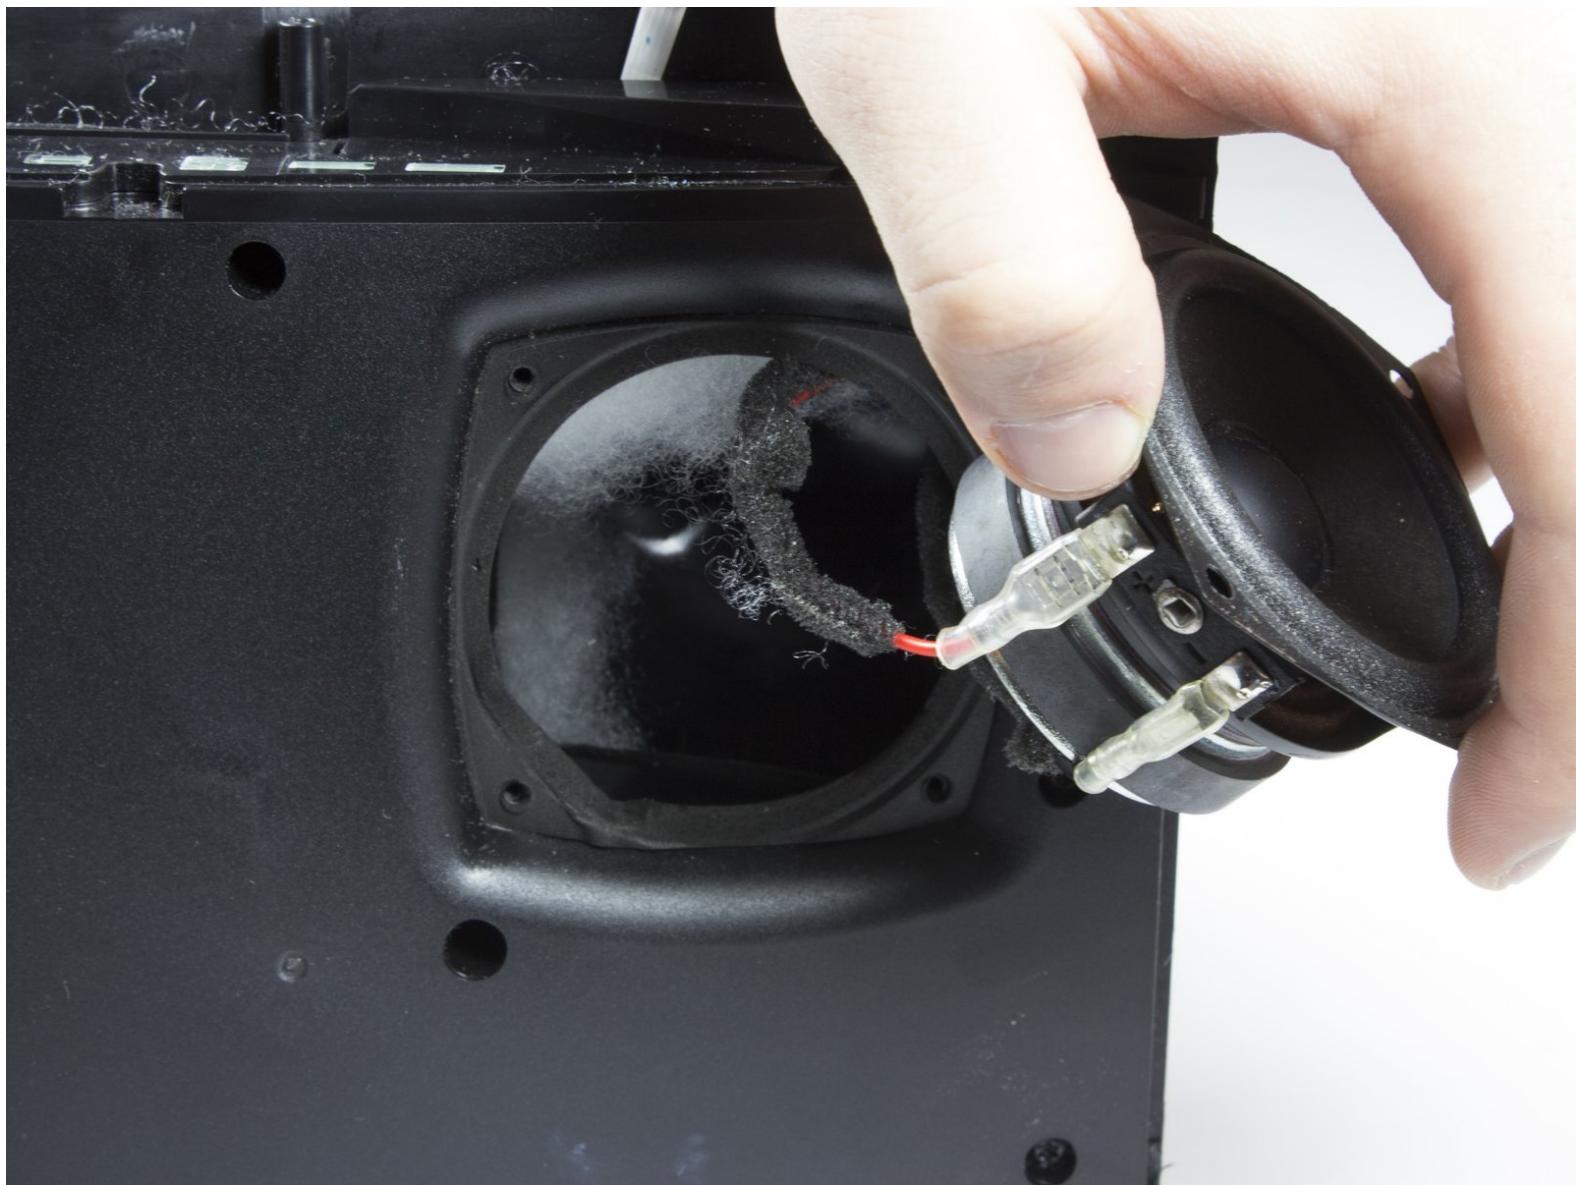

INTRODUCTION

This guide can be used to replace the front speakers of Monster Soundstage S2 speaker.

TOOLS:

- [Spudger \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [64 Bit Driver Kit \(1\)](#)
- [Essential Electronics Toolkit \(1\)](#)

Step 1 — Speaker Grille



- Use a spudger or your fingers to pry off and remove the rubber pad on the bottom of the speaker.

Step 2



- Remove the five 10mm screws with a TR 10 screwdriver.
- Use a spudger to break the remaining adhesive holding the grille to the speaker body.

⚠ Be sure you don't bend the grille; it is not free from the speaker yet.

Step 3



- Flip speaker around and use a plastic opening tool to remove the top panel from the speaker.

Step 4



- Use a plastic opening tool to remove the foam and uncover four more screws.
- Use a TR 10 screwdriver to remove the five 10mm screws on the top of the speaker.

Step 5



- Carefully remove the top cover.

 Be careful not to tear or stress the cable that provides power to the power LED.

Step 6



- Use a TR 10 screwdriver to remove two of the 10mm screws that secure the speaker grille.

 Do not attempt to remove the grille just yet.

Step 7



- With the top panel removed, use a spudger to remove the display panel.
⚠ The clips on the display panel are quite fragile. Pry up both edges of the display before attempting removal.
- Use a TR 10 screwdriver to remove the four final 10mm screws securing the speaker grille.

Step 8



- Remove the front speaker grille.

Step 9 — Front Speakers



- After removing grille, you will see the speakers.
- Remove the eight 10mm screws that surround the speakers. There will be four around each speaker.

Step 10



- Carefully lift each speaker from the housing. It may be necessary to break a light adhesive seal.

⚠ Be aware of the two wires that are connected to each speaker.

- Set each speaker beside the main housing.

Step 11



- Carefully but firmly unplug the two wires from each driver.
- The front speakers can now be removed.

To reassemble your device, follow these instructions in reverse order.