




# Panasonic Lumix DMC-FX01 LCD Screen Replacement

If your camera's LCD screen suffered an untimely demise, this guide is for you.

Written By: Andrew

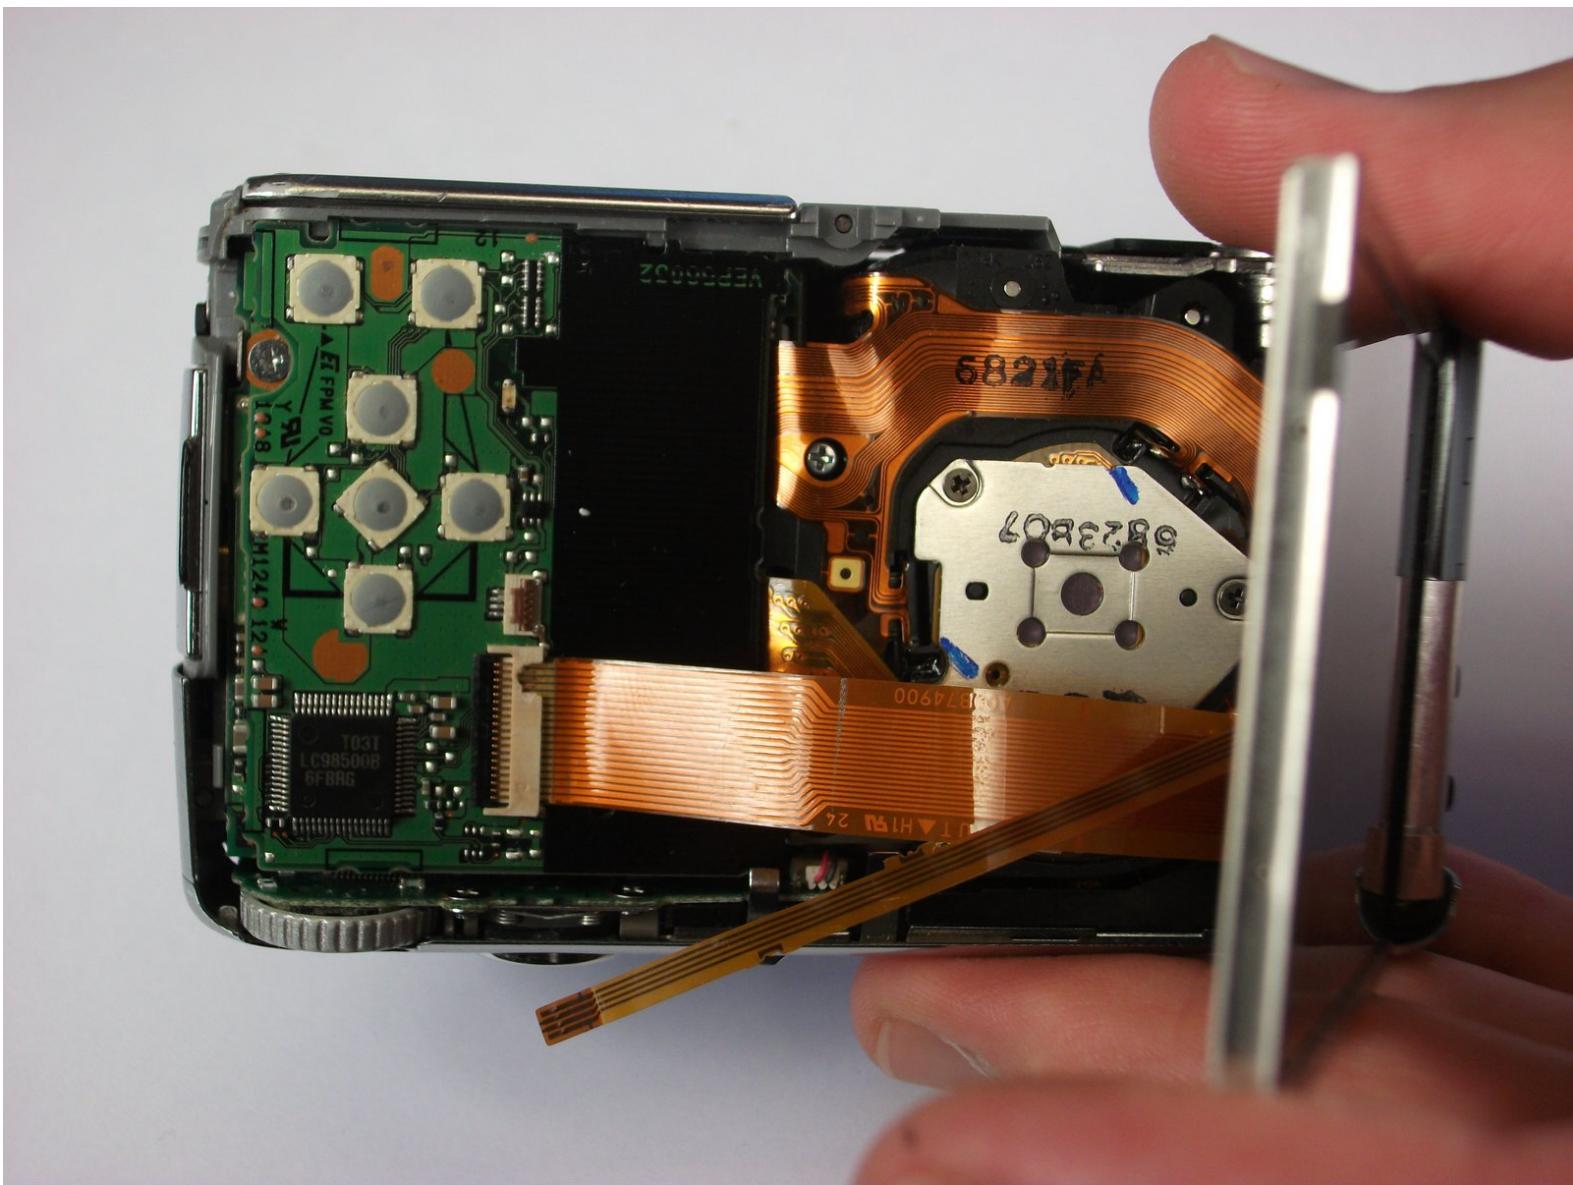

## INTRODUCTION

This guide shows how to remove the LCD screen from the circuit board and replace it.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Battery



- Locate the memory card and battery card latch on the bottom of the camera.
- Slide the latch to the open position.

## Step 2



- Open the battery latch, and slide the battery release lever to the right.

## Step 3



- Remove the battery from the camera.

## Step 4 — Rear Casing



- Using a size #00 Phillips screwdriver, remove the three 4.58 mm screws on the bottom of the camera.
- Use this screwdriver for all screws in the device.

## Step 5



- Remove the 3.15 mm screw on the left side of the camera.

## Step 6




- Remove the left side casing.

## Step 7



- Remove the two 3.15 mm screws on the right side of the camera.

## Step 8

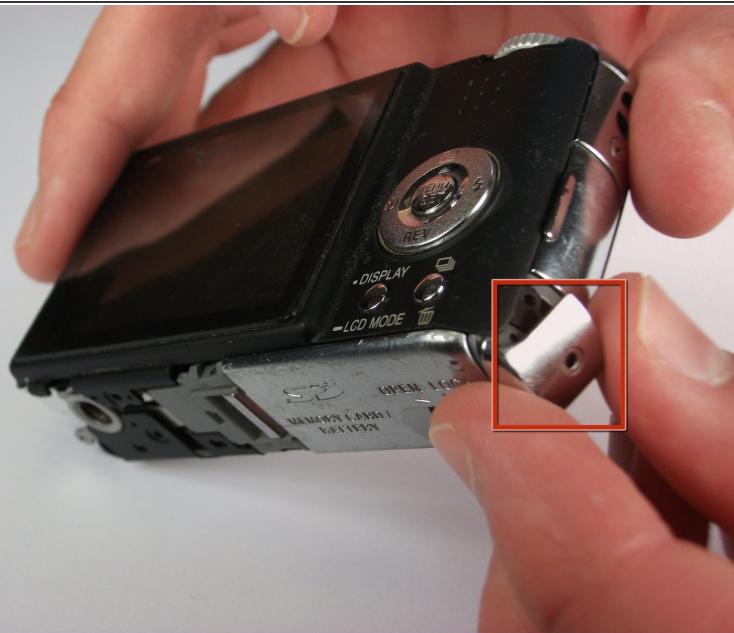

- Remove the bottom right panel.


## Step 9



- Gently remove the back casing.


 Start at the bottom and carefully pry towards the top to get this piece free.

## Step 10 — LCD Screen

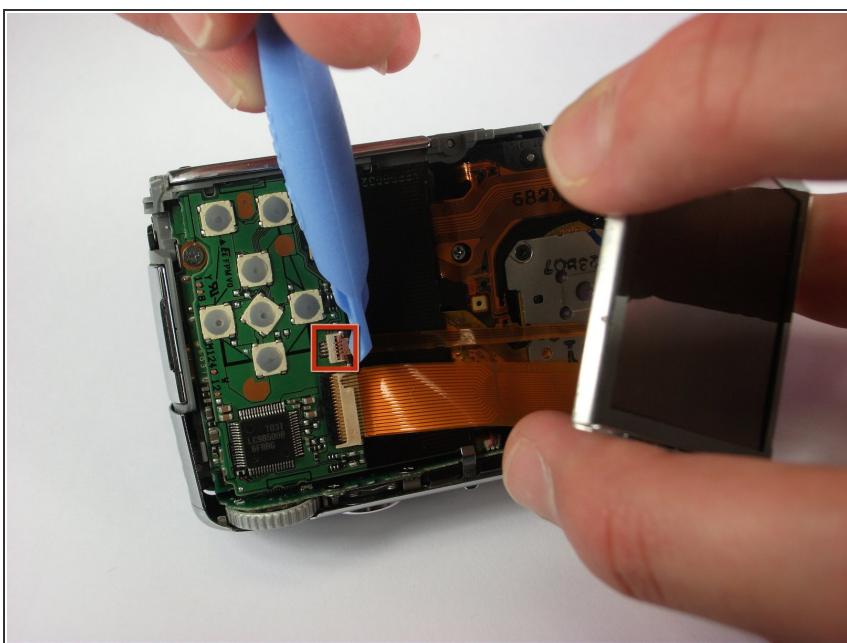

- Gently lift up the LCD screen.
- Using a plastic prying tool, flip up the latch that holds the thin ribbon in place.
- It should fall out on its own or with a gentle tug.

## Step 11

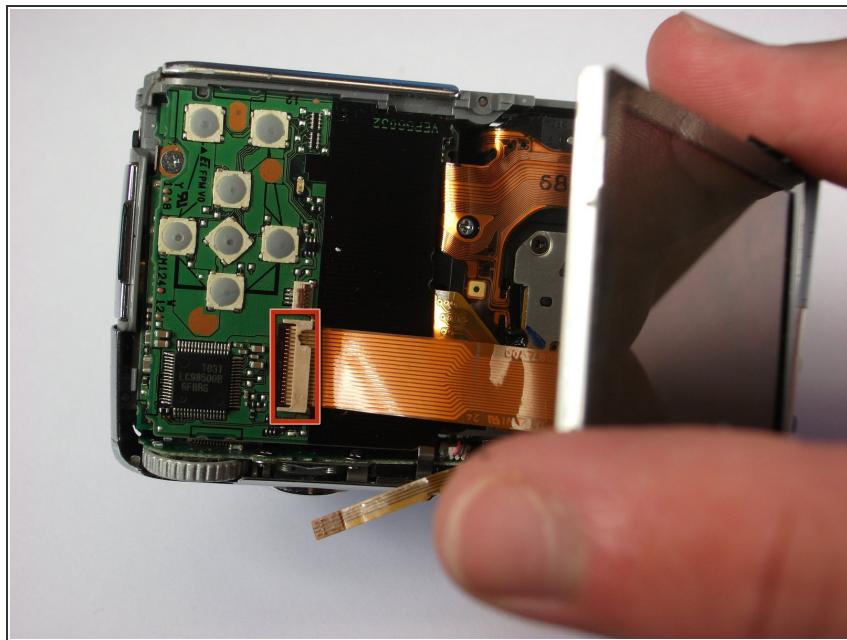

- Gently tug the thicker ribbon to remove it from its housing.

To reassemble your device, follow these instructions in reverse order.