



Panasonic Lumix GX80/85 Teardown


Written By: Andi



INTRODUCTION

Disassembly to get to the sensor. Some images are courtesy of lifepixels.com

Step 1 — Panasonic Lumix GX80/85 Teardown

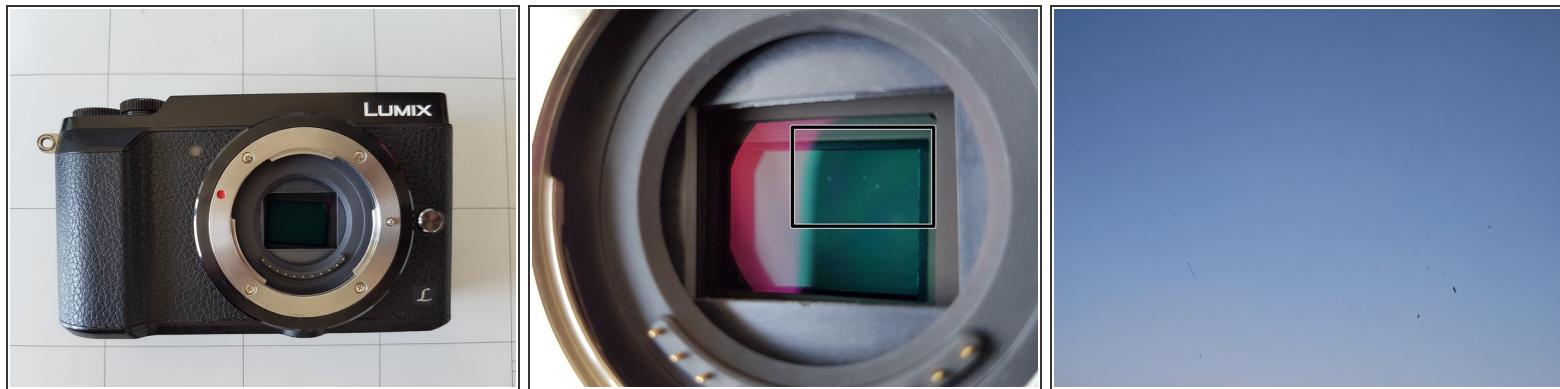

- I have dust particles underneath the sensor glass, so sensor swabs didn't help me. I will try to get inside and under the glass. Additionally the EVF is overbright after a drop and maybe can be rearranged in the process.
- You can spot the dust best if you set the camera to the "A" mode at f/22 and take a picture of the sky

Step 2



- Start with these two screws. Remember screw sizes and position, there are many different lengths used!

Step 3



- remove the flash spring as shown and the four screws

Step 4




- Remove this screw

Step 5




- Insert wisdom here.

Step 6

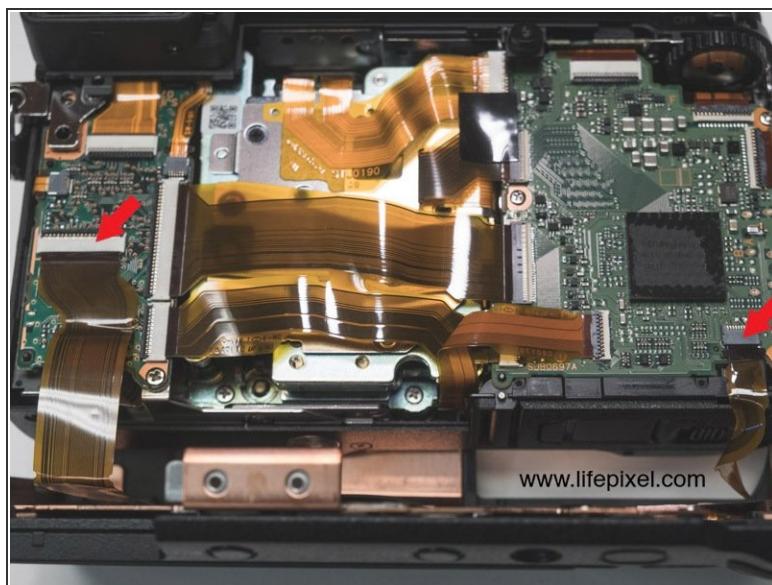


- remove the backplate and remove the ribbon cables

Step 7

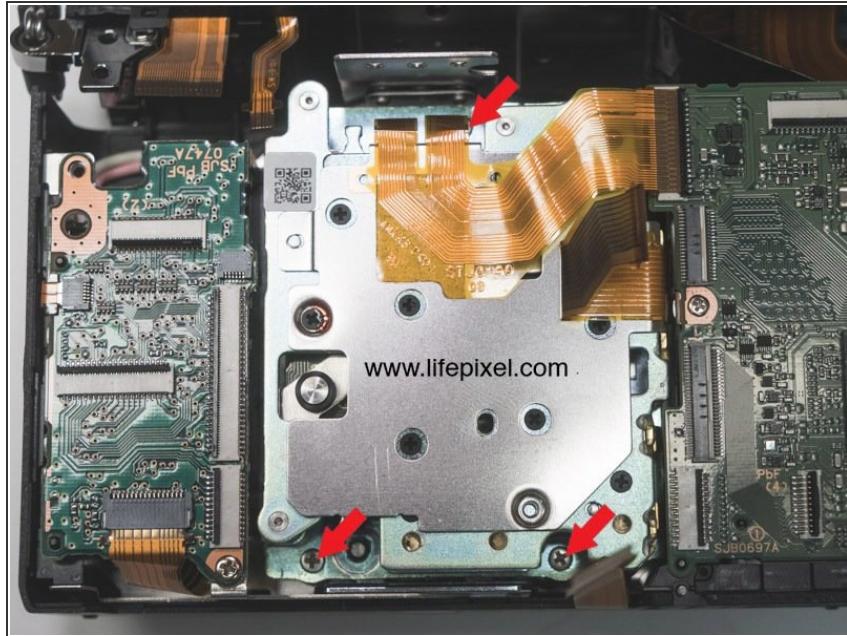


- remove the 3 screws

Step 8

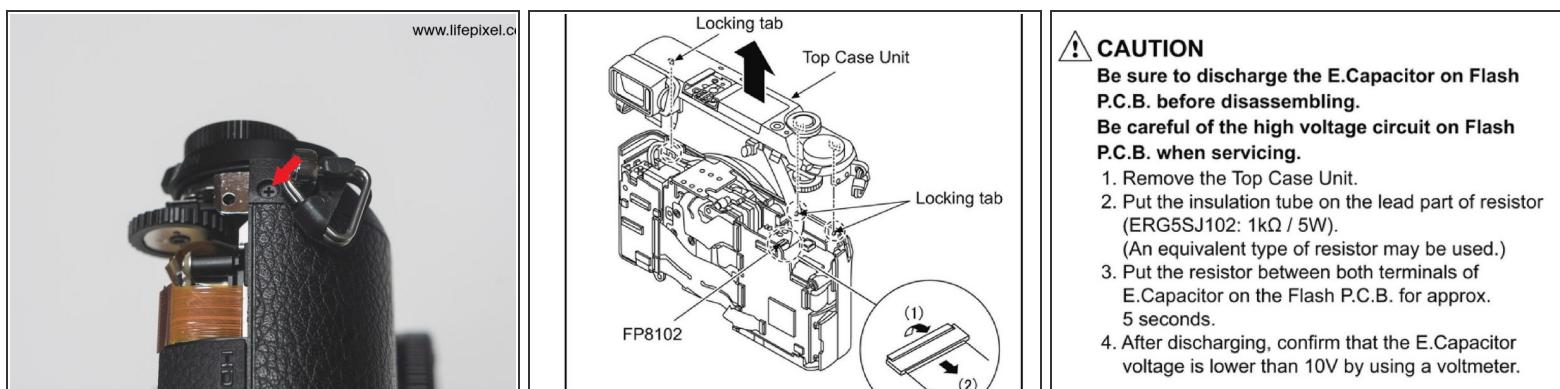


- to remove the sensor more easily you can remove the top bar before

Step 9

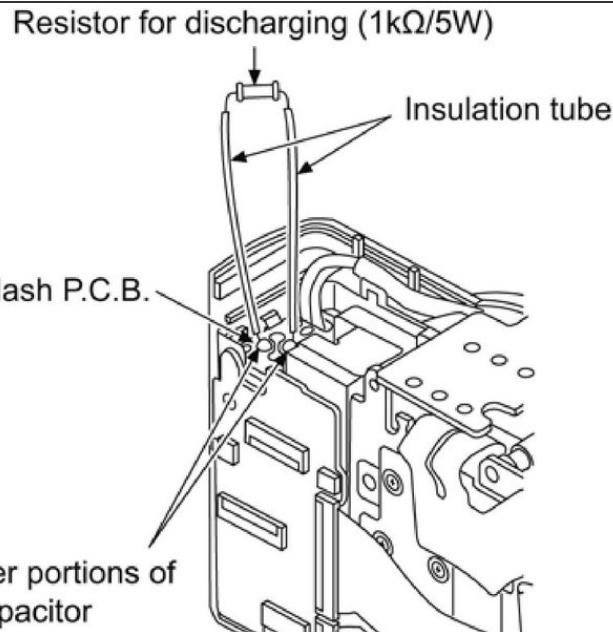

- Flash E.Capacitor removal

Step 10

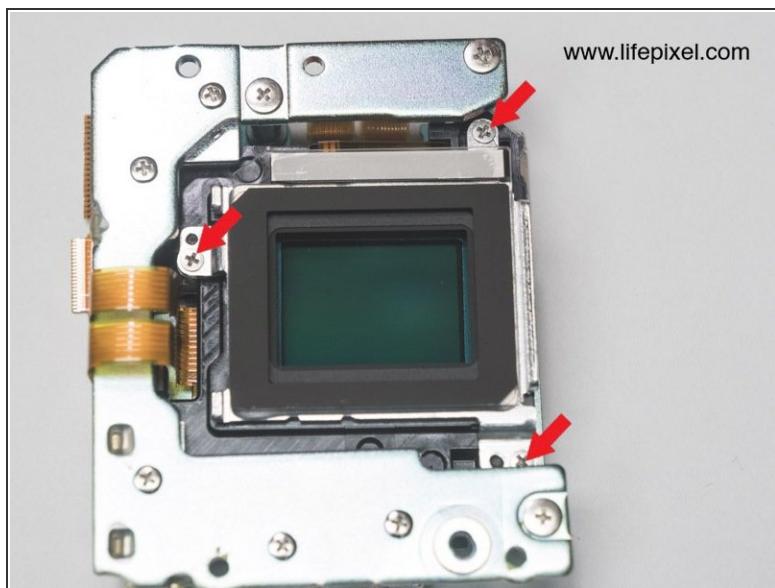

- Remove the 3 screws to get the sensor cover glass off. Be Careful not to let them fall inside the housing. There are extremely strong magnets!

To reassemble your device, follow these instructions in reverse order.

