



# Philips Satinelle Disassembly

This guide will show how to disassemble the Phillips Satinelle for parts replacement.

Written By: Nathan Christian



---

# INTRODUCTION

This guide will teach how to disassemble Phillips Satinelle for parts replacement

---



## TOOLS:


- [iFixit Opening Tools](#) (1)
  - [Large Needle Nose Pliers](#) (1)
  - [Metal Spudger](#) (1)
-

## Step 1 — Philips Satinelle Disassembly



- Unplug the device and remove the purple guard.
- Remove the head by pressing the right side of the head (with the device facing away from you).
- You will hear a 'click' and the head will become dislodged from the body of the device.

## Step 2

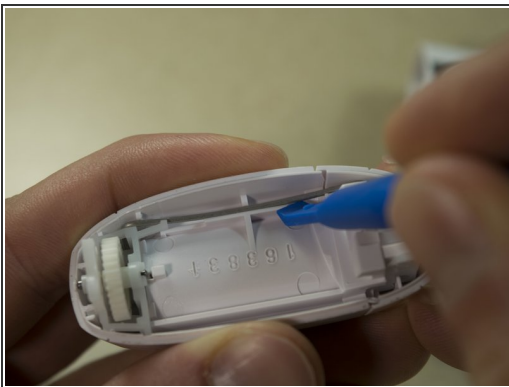




- While wearing safety glasses, use a plastic opening tool to pry from right to left to pry out the tensor clip.
- Be careful not to lose the clip. It will likely fly off when it releases.

### Step 3



- The left side will swing down.
- Remove the Tweezers.

### Step 4

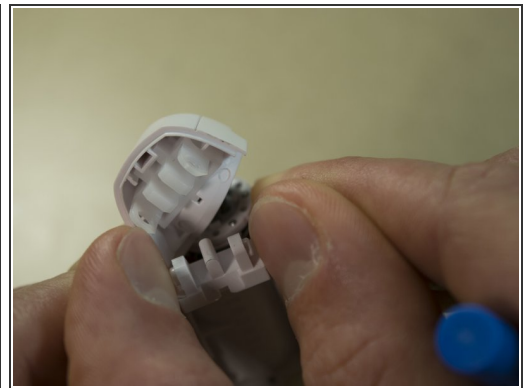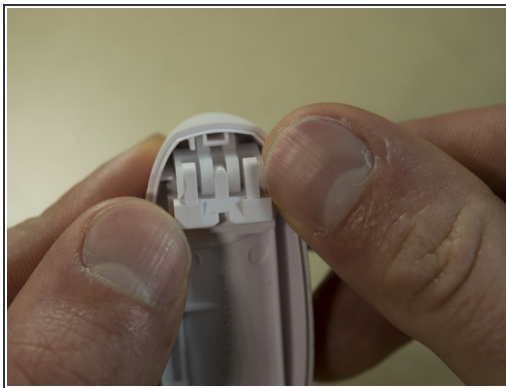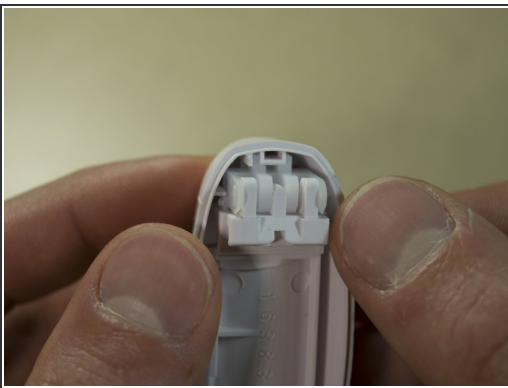




- Remove the plastic component that swings down.
- Use fingernails to lift clips from stubs.

## Step 5




- Using Needle Nose pliers remove metal roller track on both sides of the Tweezers Head.

## Step 6

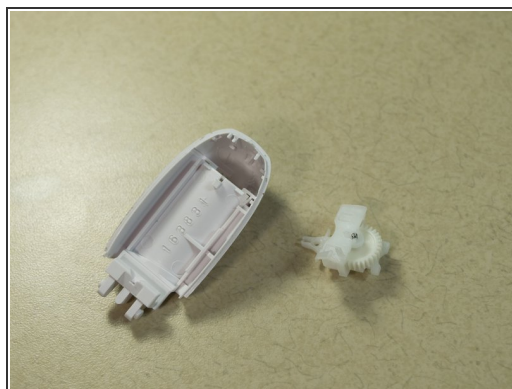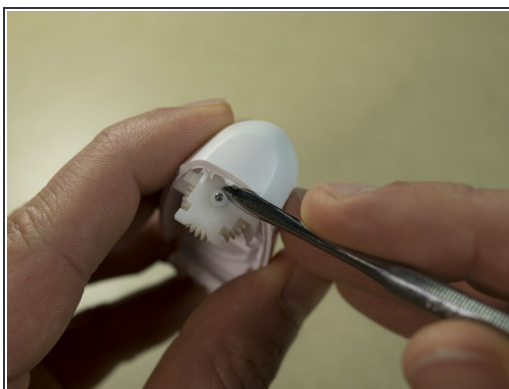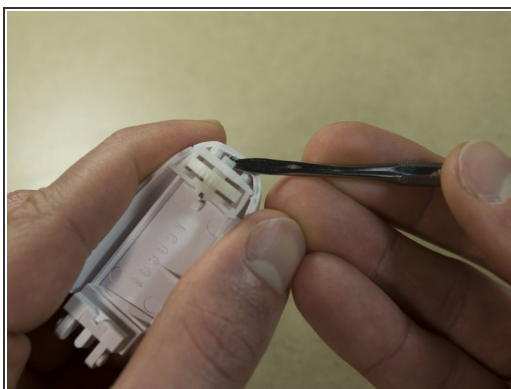

- Use a spudger to pry the gear housing unit from the base.

## Step 7

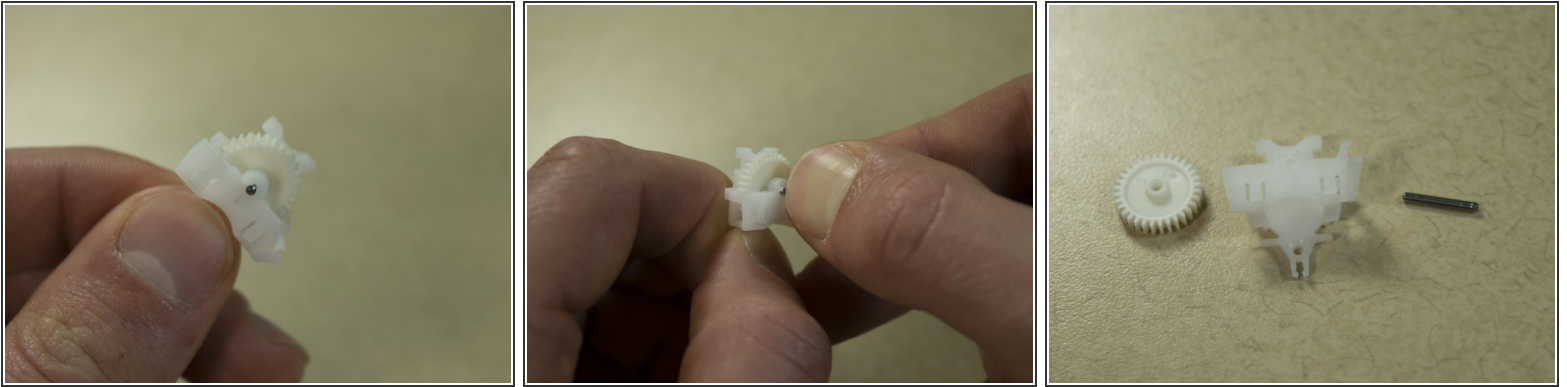

- Use your thumbnail and a pair of needle nose pliers to push out the gear housing retention pin.

To reassemble your device, follow these instructions in reverse order.