



Pioneer A1 XW-SMA1-K Back Panel Replacement

If you are looking to replace the back panel of your Pioneer A1 XW-SMA1-K, here is your replacement guide.

Written By: Luke Patton



INTRODUCTION

If you are looking to replace the back panel of your Pioneer A1 XW-SMA1-K, here is your replacement guide.



TOOLS:

- [Metal Spudger](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Back Panel




- Use the spudger to remove the mesh front panel.

Step 2



- Use a Phillips #1 screwdriver to remove the thirteen 12 mm screws in the speaker frame.
- Remove the speaker frame by pulling vertically upwards revealing the motherboard.

Step 3

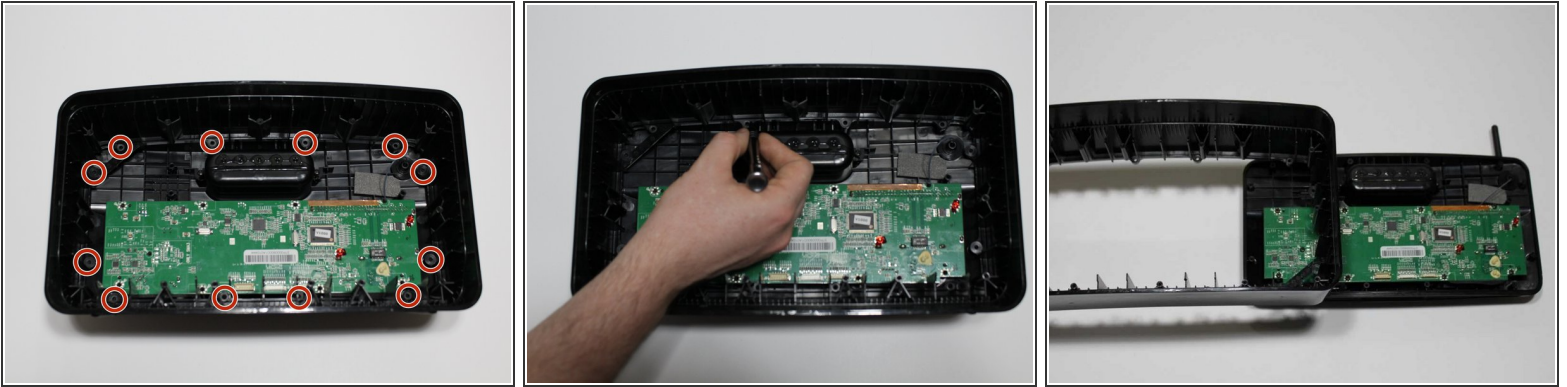

- Use a Phillips #1 screwdriver to remove the twelve 12 mm screws from the middle frame.
- Remove the middle frame by pulling upward and vertically.

Step 4



- Use the Phillips #1 screwdriver to remove the nine 12 mm screws from the motherboard.
- Flip the motherboard over.
- Remove the motherboard by detaching the antenna.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2020-01-23 12:11:20 AM (MST).

