




RIDGID R84015 X2 Case Removal

Written By: Evan Long

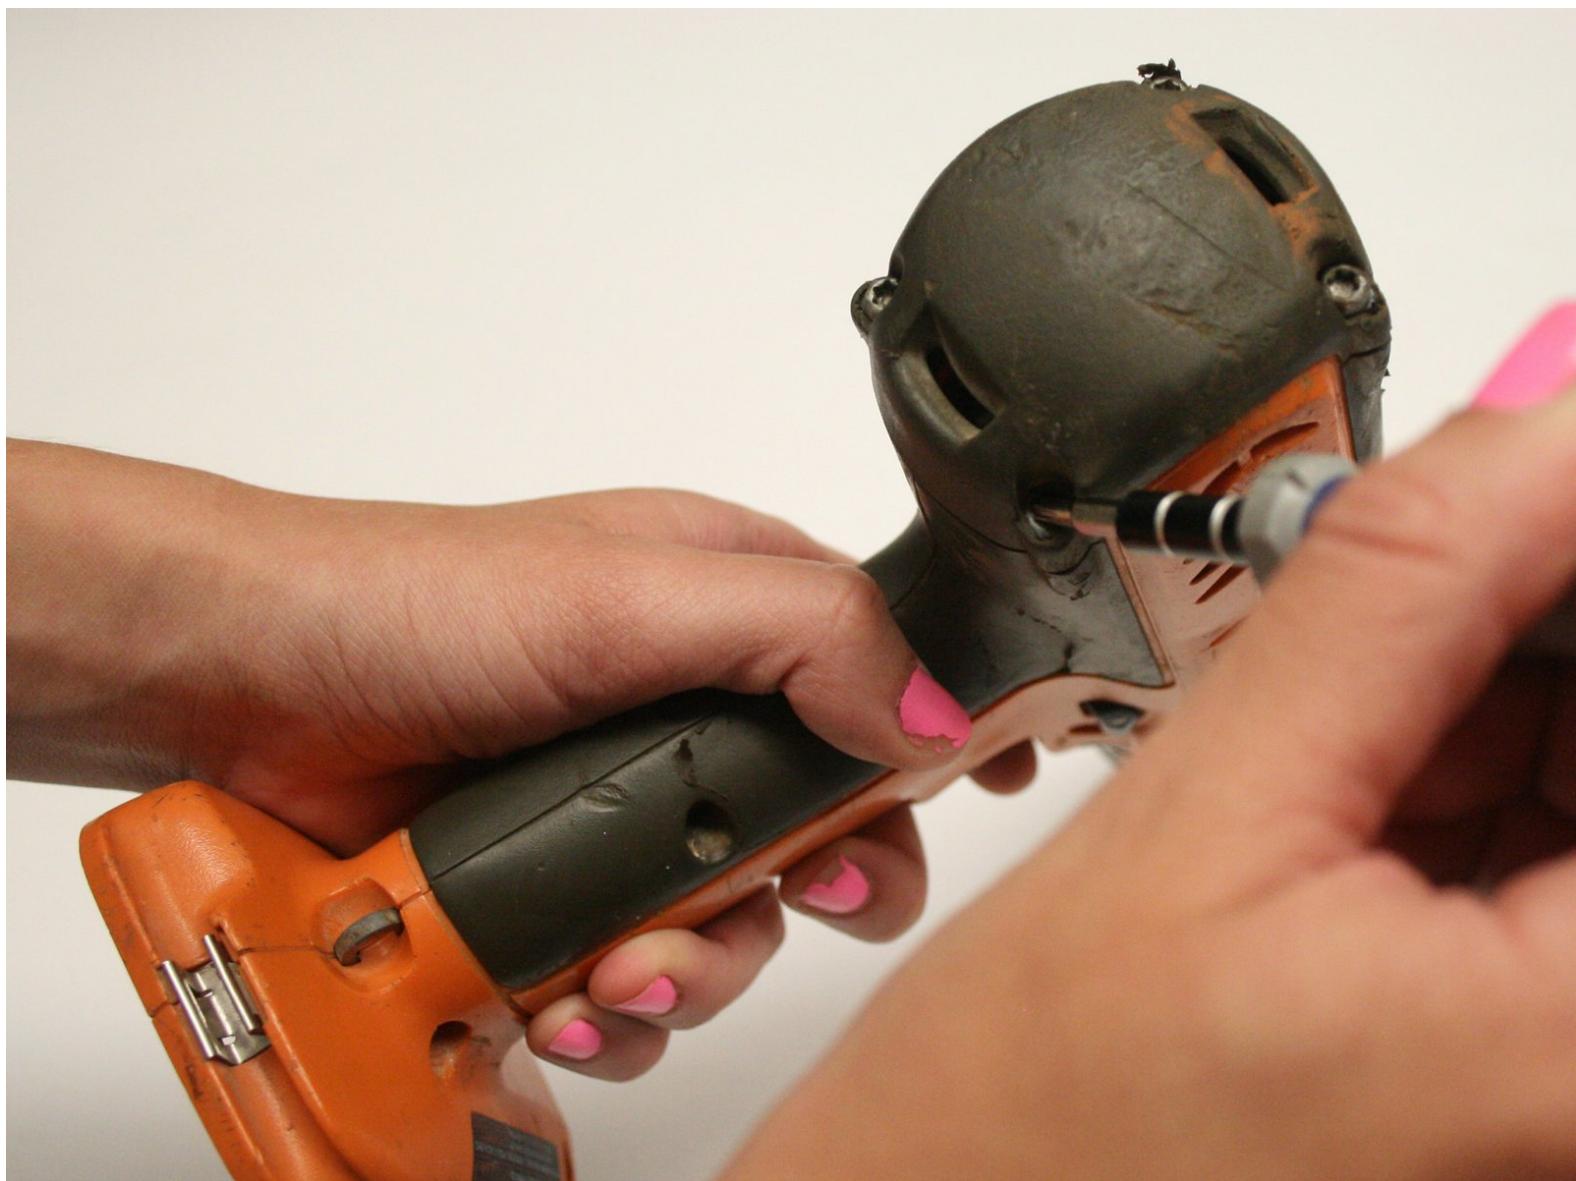

INTRODUCTION

First step to repairing RIDGID drill. All it takes is getting the case off...

TOOLS:

- [Phillips #2 Screwdriver \(1\)](#)
- [T20 Torx Screwdriver \(1\)](#)

Step 1 — RIDGID R84015 X2 Case Removal



- Remove the backplate.
- Using a Torx T20 screwdriver, remove the four screws attaching the back plate.

Step 2



- Remove the drill handle.
- Using the Phillips #2 screwdriver, remove the five screws attaching the drill handle to the body.

Step 3



- Remove the gear casing from the body.
- Using the Philips #2 screwdriver, remove the four screws attaching the gear casing to the body.

To reassemble your device, follow these instructions in reverse order.