



RedOctane X-Plorer Teardown

Complete teardown of this plastic guitar used on xbox 360, ps3, and pc.

Written By: thefluffyfist




INTRODUCTION

The screws could be torx or Philips head in the body and where the neck bolts to the body.

TOOLS:

- **T10 Torx Screwdriver (1)**
- **Phillips #1 Screwdriver (1)**

Step 1 — Case

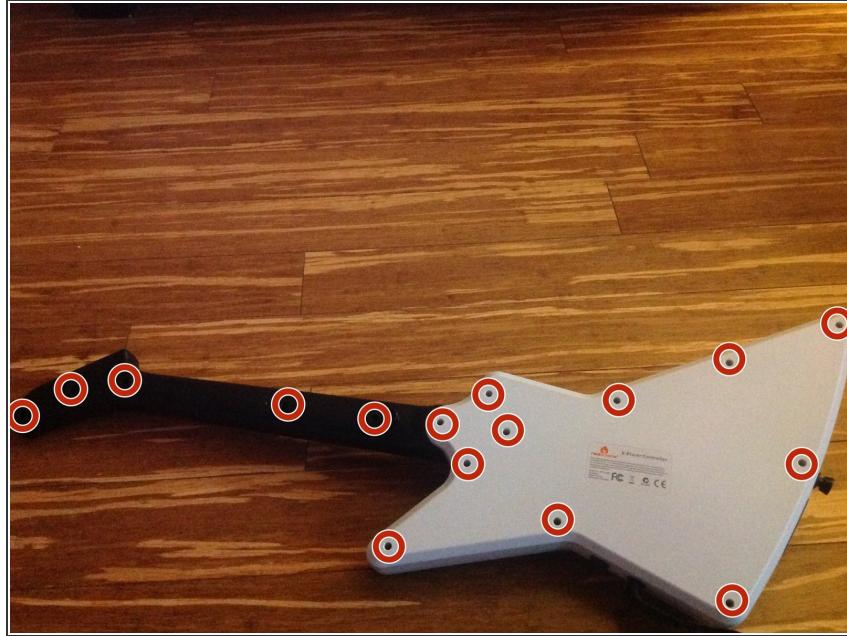


- Remove all 16 #10-torx screws from the back side of the case.
- Gently separate the case pieces.

i A strong magnet helps greatly when taking out the screws.

! Keep in mind when reassembling, the case is plastic so, don't tighten the screws too tight.

Step 2 — Neck

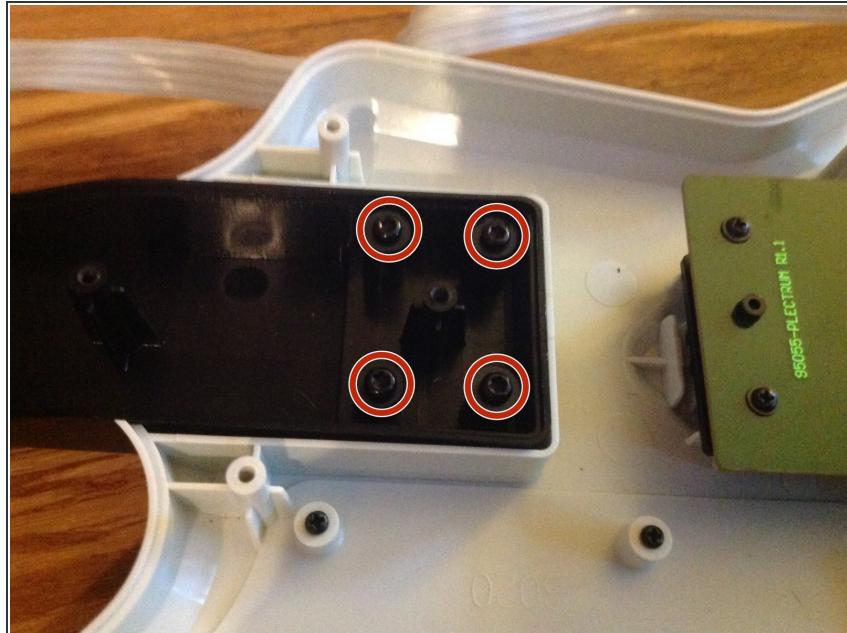

- Unscrew the 4 #10-torx screws.

Step 3 — Colored Keys




- Unscrew the 2 Philips head screws
- Peel off the pads.
- Push the colored keys out from the other side.

Step 4 — Strum Bar




- Unscrew the red screws and pull the board out.
- Then, unscrew the blue screws
- Pull the bracket things off.
- Pull out the pin.

Step 5 — Unused port

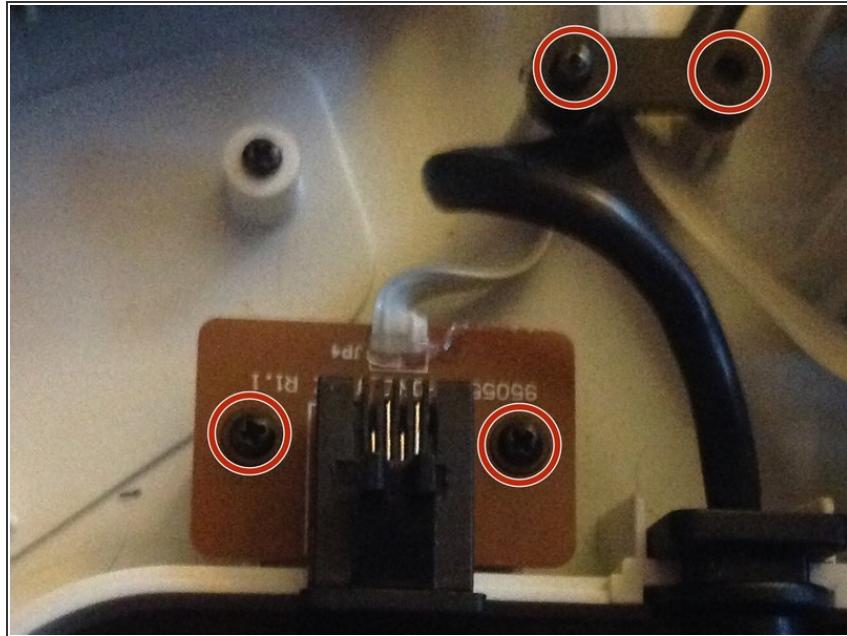


- Unscrew the 4 Philips head screws.

Step 6 — Aux Port

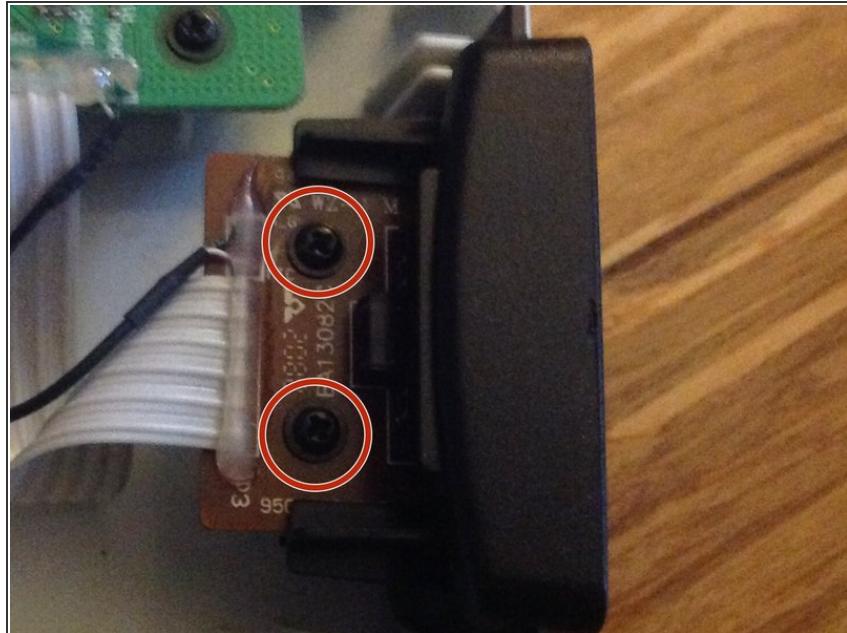


- Unscrew these 2 Philips head screws.

Step 7 — Whammy Bar

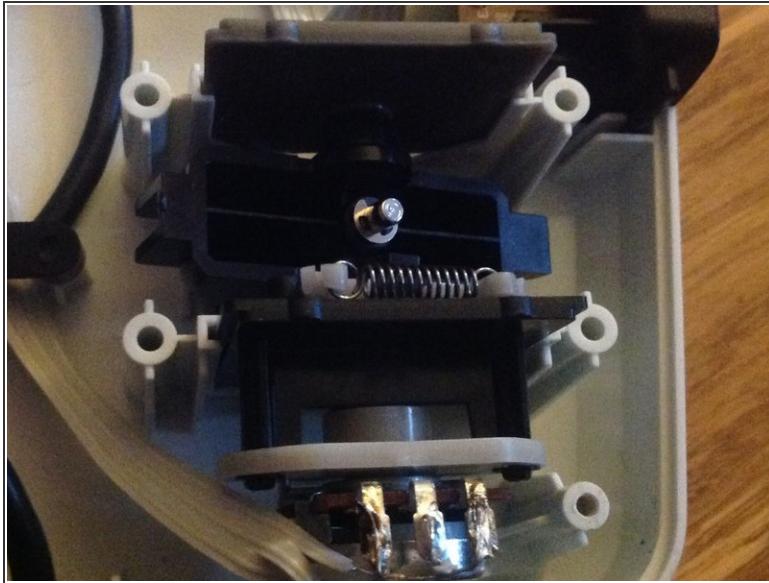

- Push from the other side until it comes out.
- Take the spring off with the connector

Step 8 — Motherboard

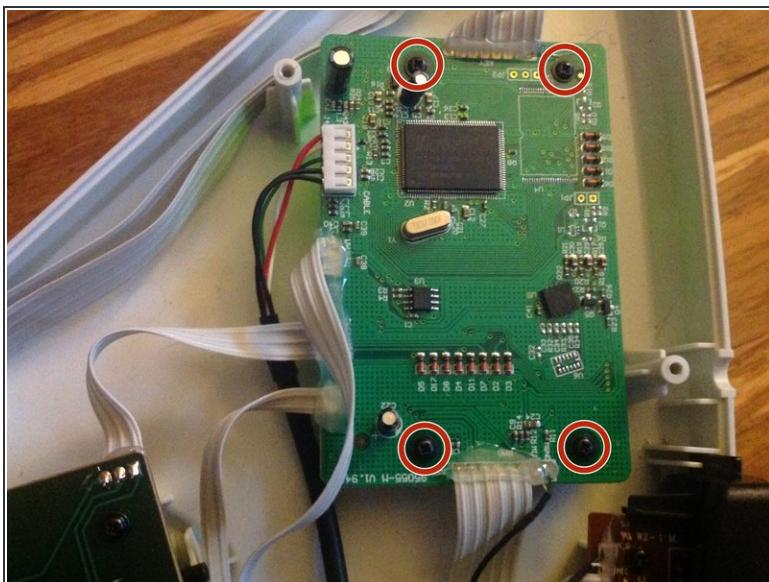

- Unscrew the 4 Philips head screws.
- Peel off the contact pads.

This document was generated on 2019-09-18 02:36:59 AM (MST).

