



# Samsung Chromebook XE500C21-A03US Back Cover Replacement

Guide on how to take off the back cover of your Samsung Chromebook XE500C21-A03US.

Written By: Alexis Cortez



This document was generated on 2019-09-21 10:43:33 PM (MST).

## INTRODUCTION

A fast and simple guide on how to take off the Back Cover on your Chromebook. This procedure is a prerequisite for doing most repairs to your Chromebook.

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)


## Step 1 — Back Cover



 Turn the power off before beginning this step.

- ⓘ Most Chromebooks contain rubber circle pads on each of the four corners to cover the screws. In order to remove the rubber pads, simply use any opening tool.
- Lay the Chromebook down so that the bottom cover is facing upward.
- Using a Phillips #00 screwdriver, remove all seven 5.5 mm screws from the back cover.

## Step 2

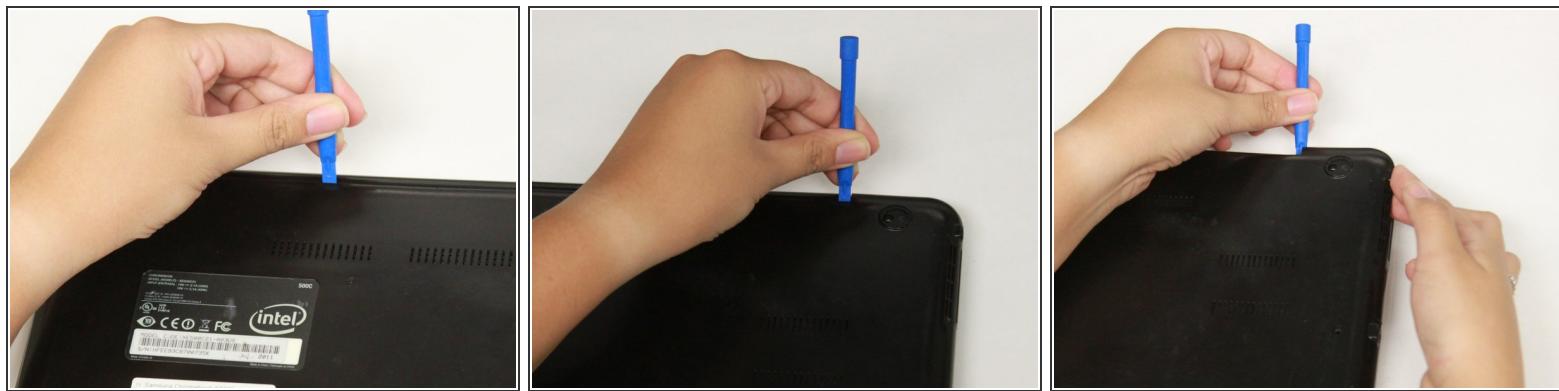

- Place the opening tool in the divot between the spine of the Chromebook and the back cover.
- Slowly glide and push down the end of the opening tool along all sides of the Chromebook to detach the brackets. You will hear the brackets detach.

## Step 3



- Using the opening tool, pry off the back cover of the Chromebook

 Be gentle while prying to avoid breaking the back cover.

To reassemble your device, follow these instructions in reverse order.