



# Samsung Galaxy Note5 Teardown

Written By: Sophia



# INTRODUCTION

[Witrigs](#) provides all of Samsung Galaxy Note 5 replacement parts.

[video: <https://www.youtube.com/watch?v=FyeTtEd5GHk>]

## TOOLS:

- Heat Gun (1)
- iFixit Opening Picks set of 6 (1)
- Suction Handle (1)
- Phillips #000 Screwdriver (1)
- Spudger (1)
- Tweezers (1)

## PARTS:

- Samsung Galaxy Note 5 replacement parts (1)

## Step 1 — Samsung Galaxy Note5 Teardown




- Remove SIM card tray at first. It's Samsung Galaxy Note 5 Duos, so there are two slots.

## Step 2




- Remove S pen.

## Step 3

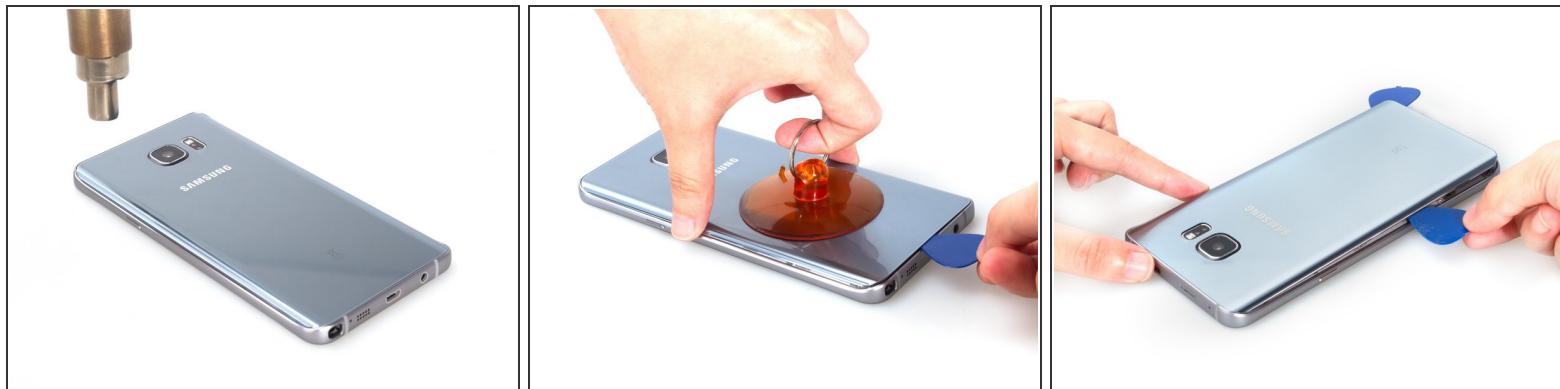

- Heat the back cover and cut it sticker underneath. Really strong adhesive. Please be careful with the glass and edged back cover.

## Step 4

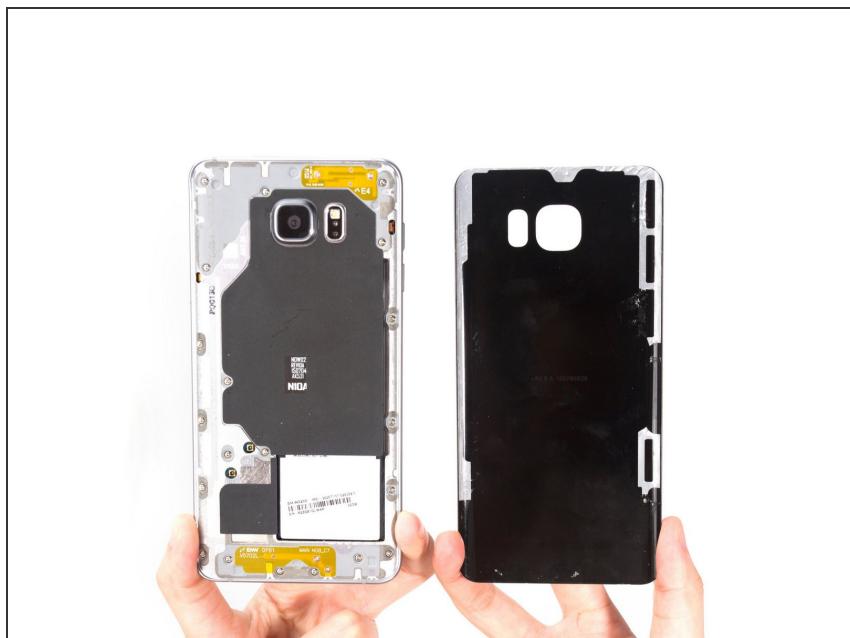

- Remove the back cover. And the white strip is adhesive sticker.

## Step 5



- Twist off all 20 screws together.

## Step 6



- Push the front assembly out from middle housing. There are a little black adhesive sticker on every corners.

## Step 7



- Release battery connector from motherboard and pry the battery up. Yes, there is also some adhesive underneath.

## Step 8






- Remove two pieces of signal flex cables. And different versions Samsung Galaxy Note 5 may have only one piece signal cable.

## Step 9




- Release LCD connector, digitizer connector, earpiece assembly connector, home button connector on the motherboard.

## Step 10

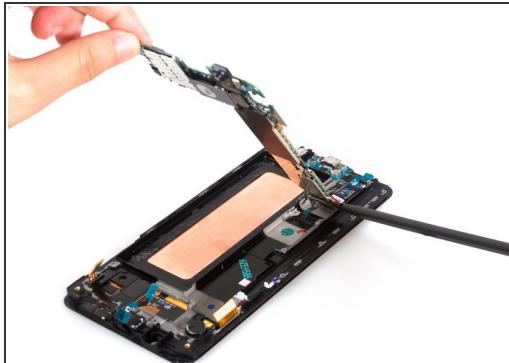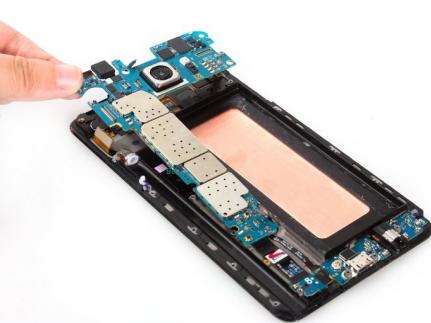


- Release USB board connector on the back and remove the whole motherboard.

## Step 11

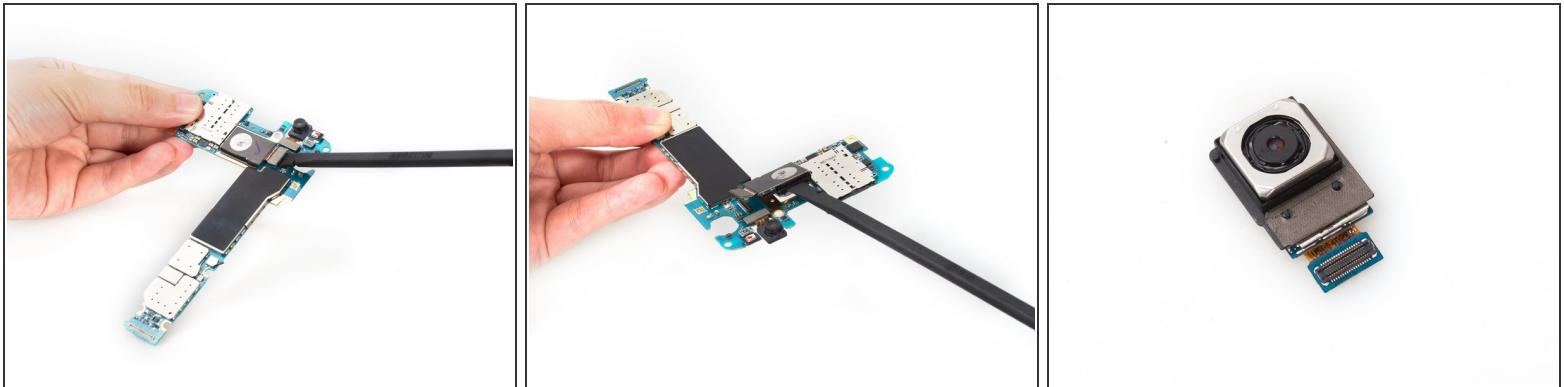


- Remove the rear camera. There is a black plastic bracket around camera. So we have to remove them together. And there is a little adhesive underlying.

## Step 12

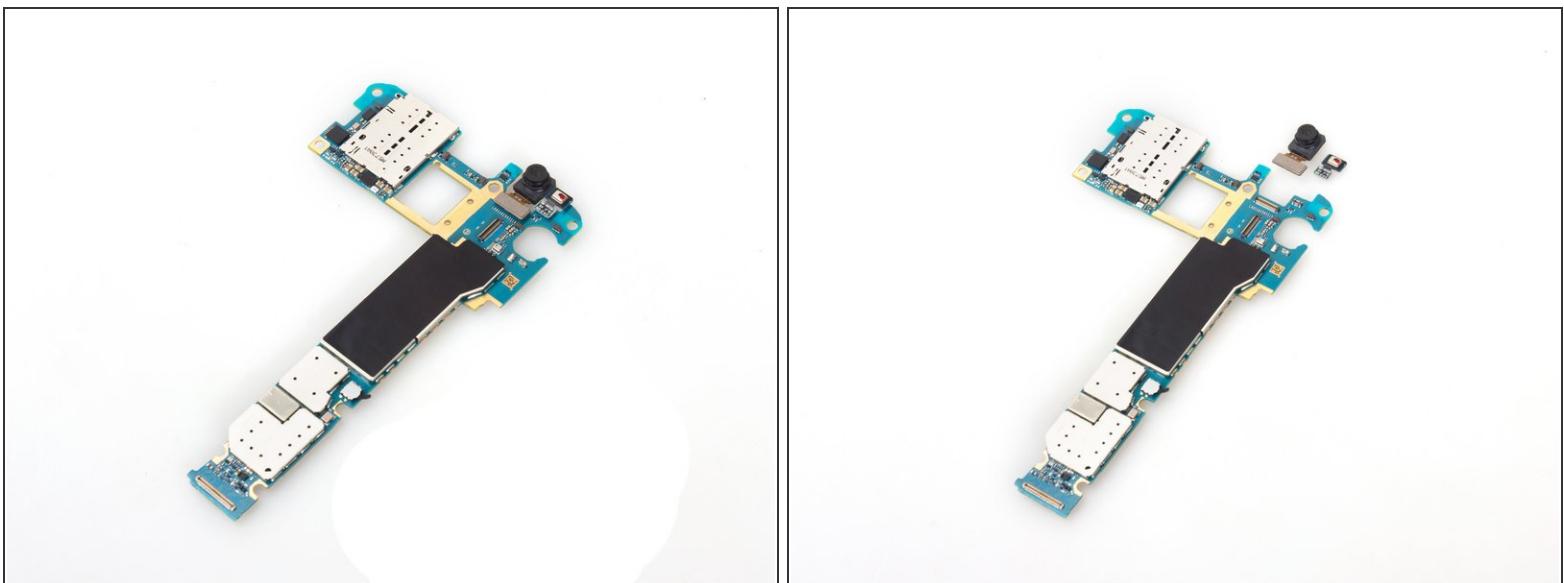


- Remove front camera and noise-canceling mic.

## Step 13

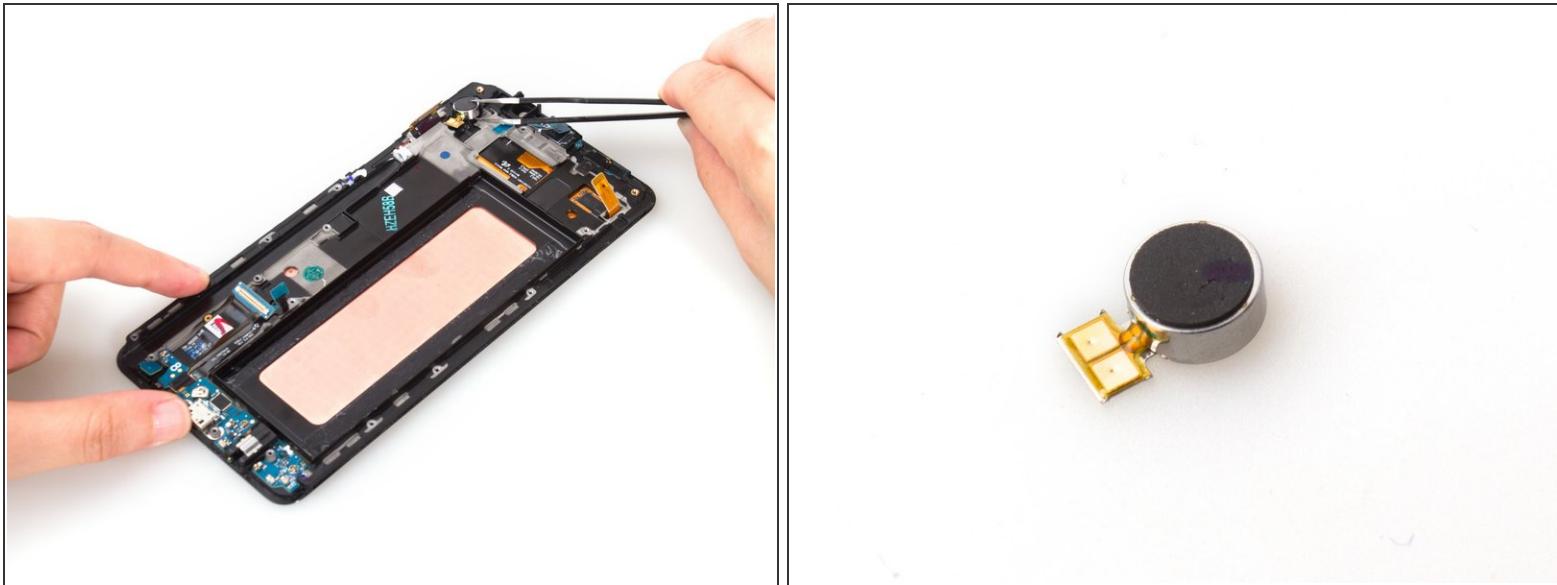

- Remove motor vibrator easily.

## Step 14

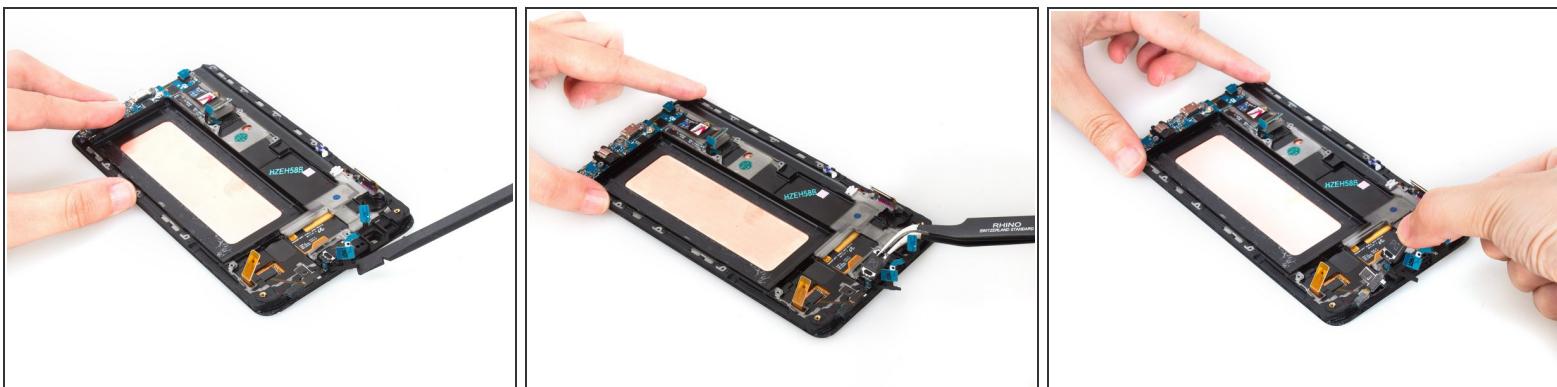

- Remove earpiece speaker assembly.

## Step 15



- That's Samsung Galaxy Note 5 earpiece assembly. It's integrated by speaker and sensors.

## Step 16




- Now try to separate LCD screen from frame. The difficulty and risk to remove screen alone are getting nearly 5 stars (5 scores all together)respectively. The screen is weak and the adhesive are strong as well too much.

## Step 17




- Since Samsung applied the design that the USB board come with soft keys together, DIY replace USB board and LCD screen alone become much more difficult.
- Be careful with the soft sensor keys on the bottom especially the flex.
- In fact, the replacement of Samsung Galaxy Note 5 LCD screen, USB board or home button nearly the same with that teardown.

## Step 18

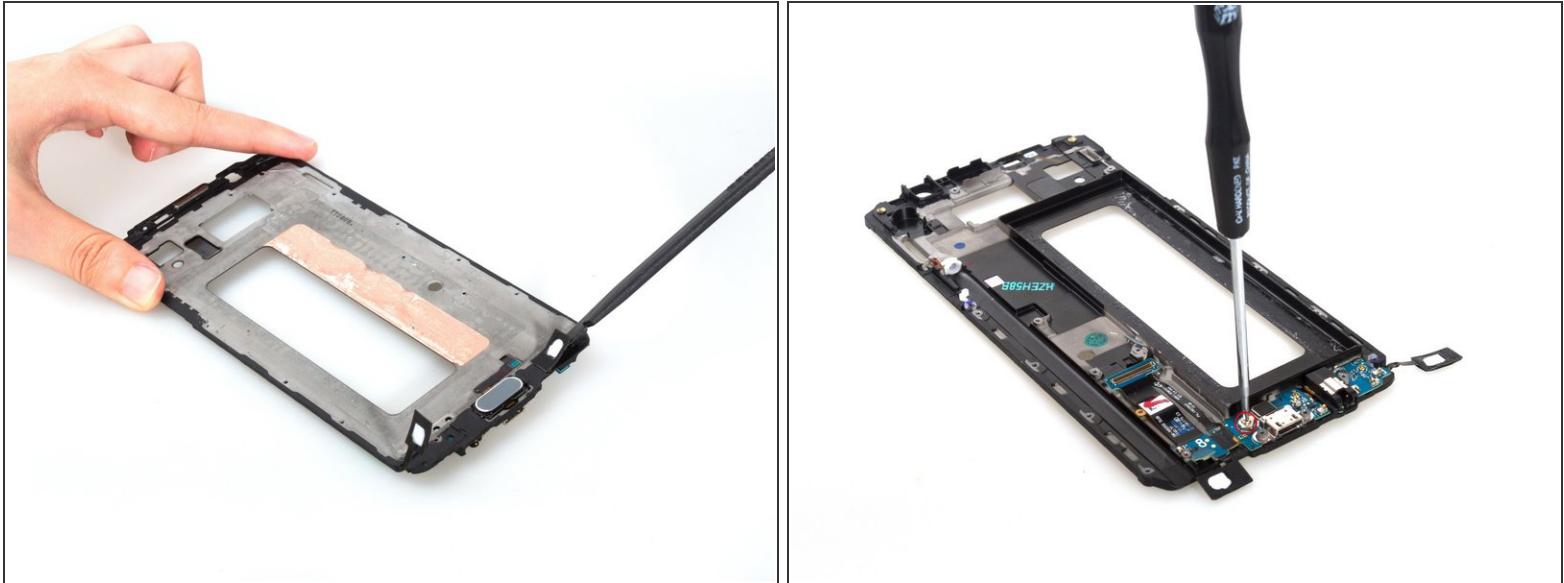


- Loosen two soft sensor keys from frame carefully. And remove the last securing screw on USB board.

## Step 19

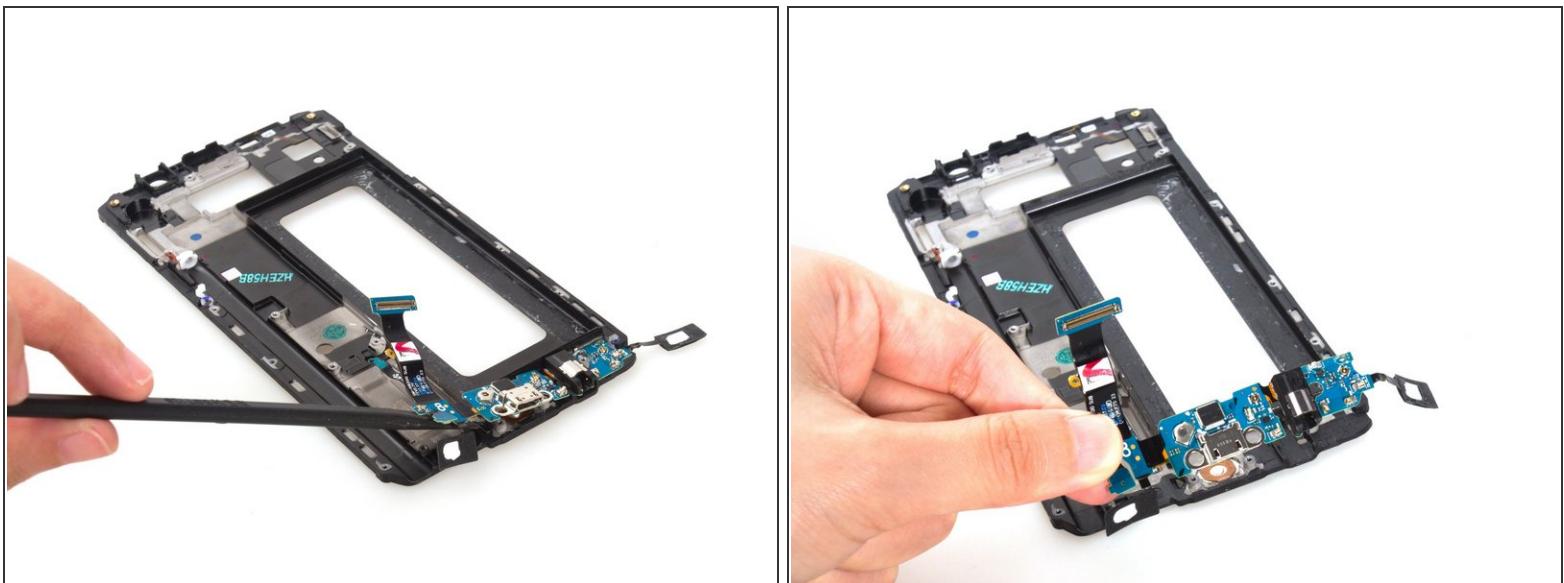


- Remove the USB board finally.

## Step 20

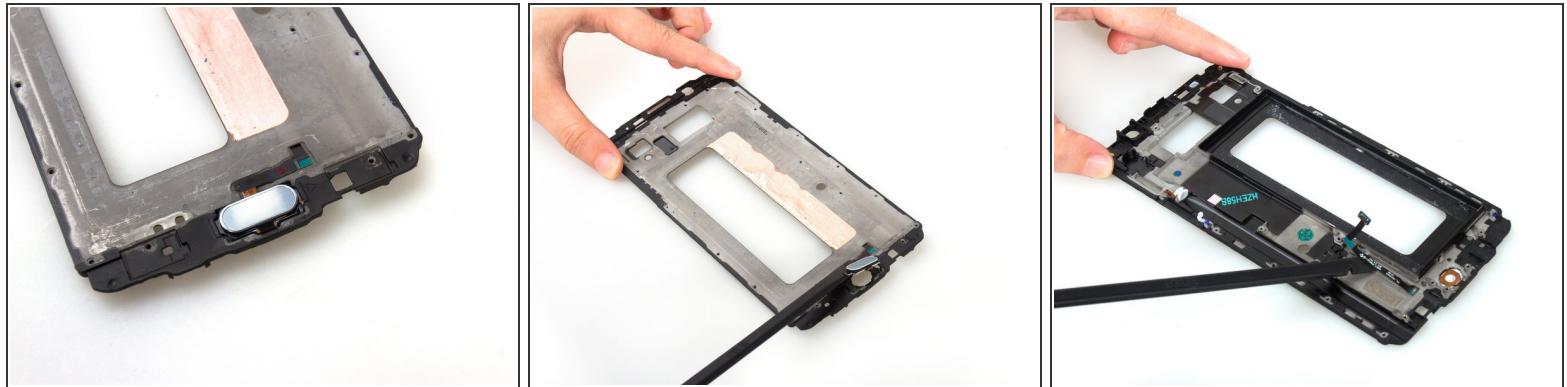

- Could you see the mark on the right of the home button? Push the button as its direction and can loosen it from securing slot easily. And then cut the adhesive sticker under the flex.

## Step 21

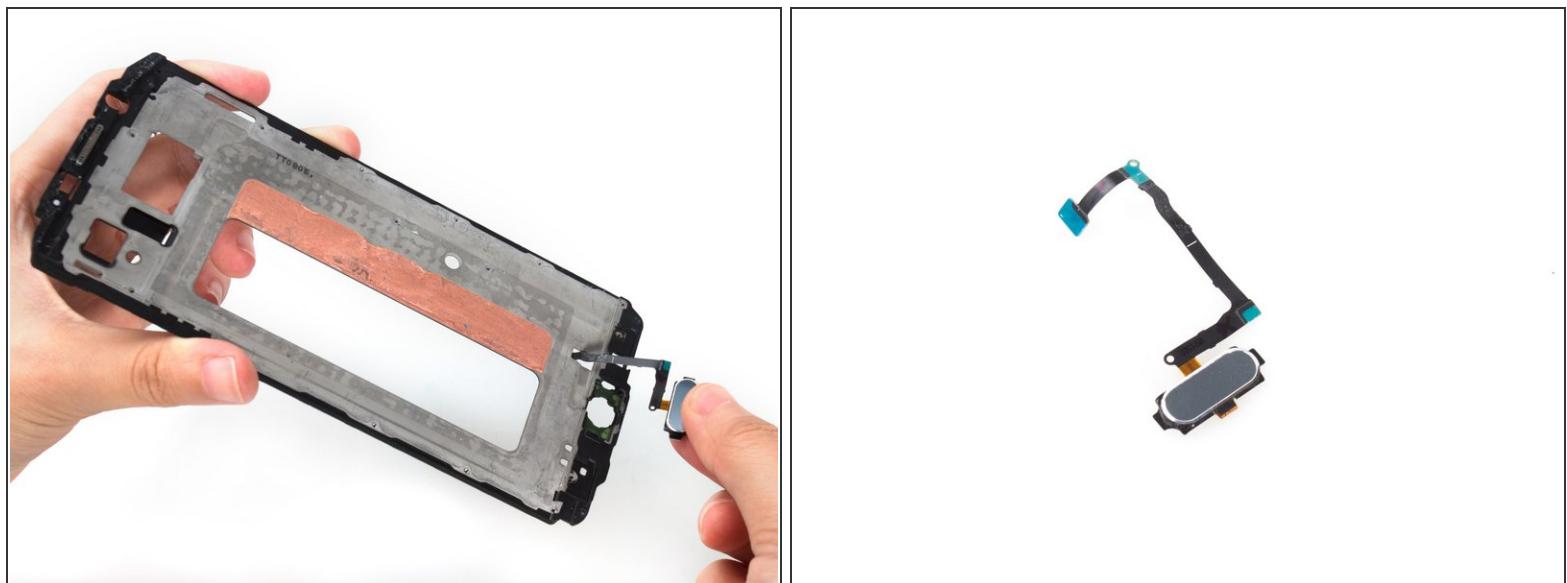

- Remove home button flex. Though it's a small component, it's really complicated and difficult to replace, even at the risk to break the screen.

## Step 22

- Done.

