




Samsung Galaxy Tab A 9.7 Battery Replacement

Use this guide to replace the Samsung Galaxy Tab A 9.7 battery.

Written By: Paulina Nguyen

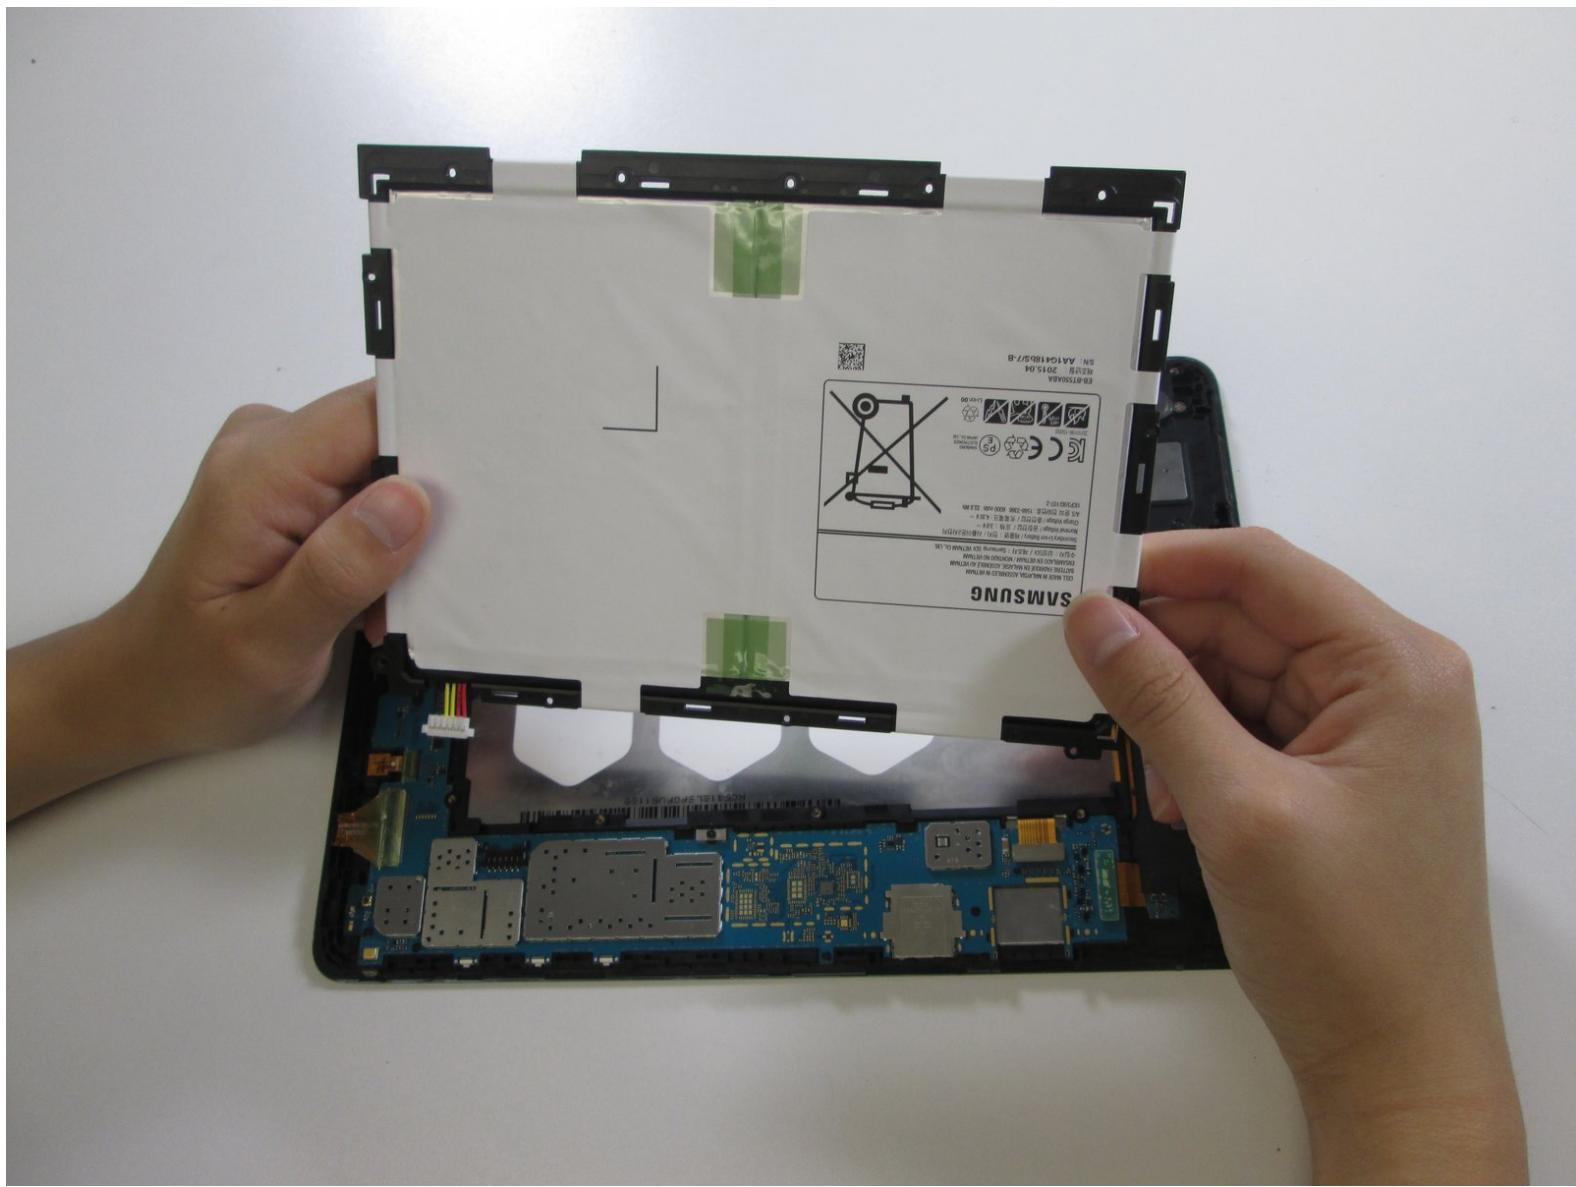

INTRODUCTION

Bring new and uninterrupted life back to your beaten and dead Samsung Galaxy Tab A 9.7 through the replacement of the battery inside the device.

TOOLS:

- Metal Spudger (1)
- Heavy-Duty Spudger (1)
- Phillips #000 Screwdriver (1)

PARTS:

- Galaxy Tab A 9.7 Battery (1)



Step 1 — Back Cover



- Insert a metal spudger between the back case and the screen of the device.
- The back cover is attached to the device by a series of snaps. The snaps are positioned about an inch from each other.
- Move the spudger along the perimeter of the device while it is in between the back case and the screen to open each snap.


(i) There will be an audible click every time a snap releases.

Step 2 — Battery

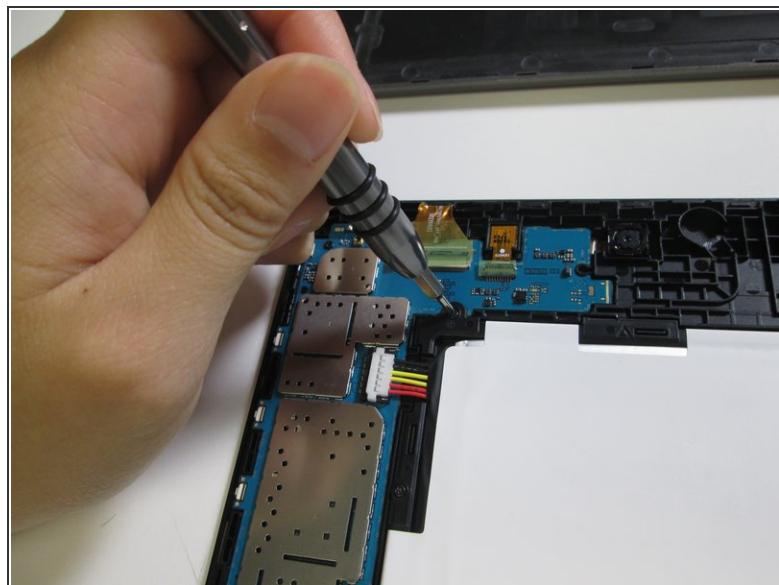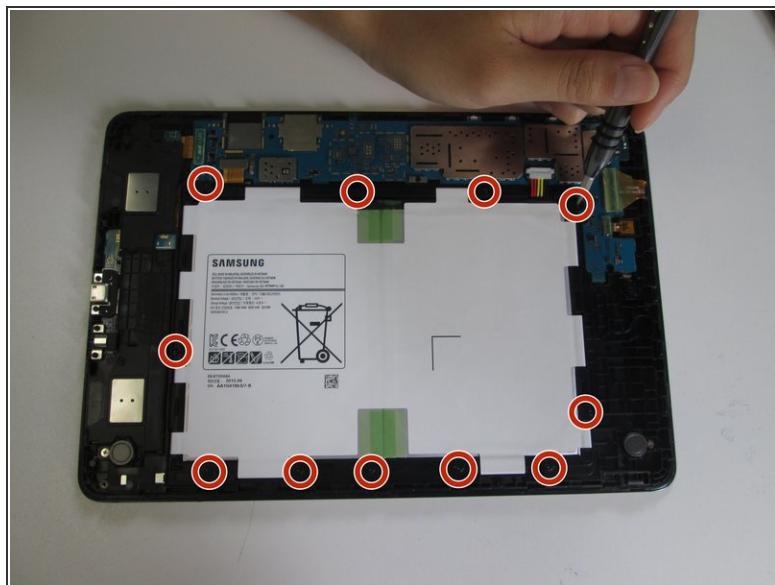


- Remove the eleven #000 Phillips 2.8mm screws that hold the battery in place.

Step 3

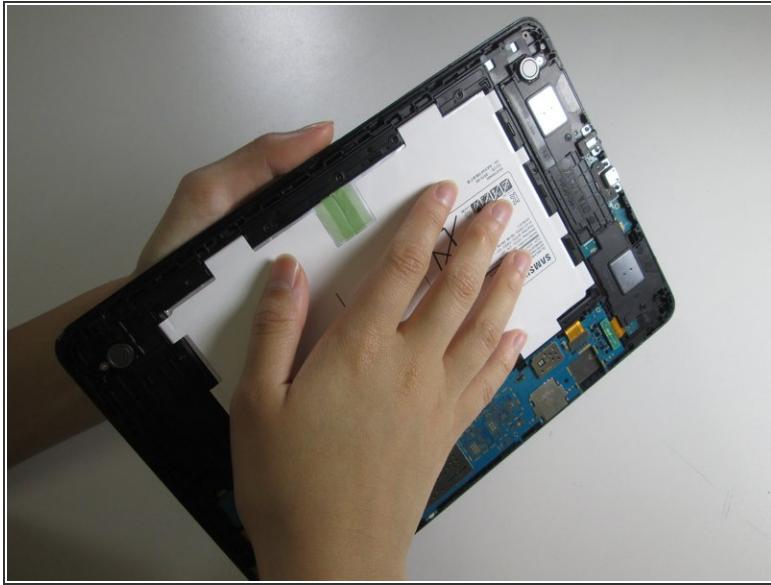


- Place one hand on the battery and grasp the outer edge of the device with the other hand.
- Flip the device over so that the battery falls over and onto your hand.

Step 4

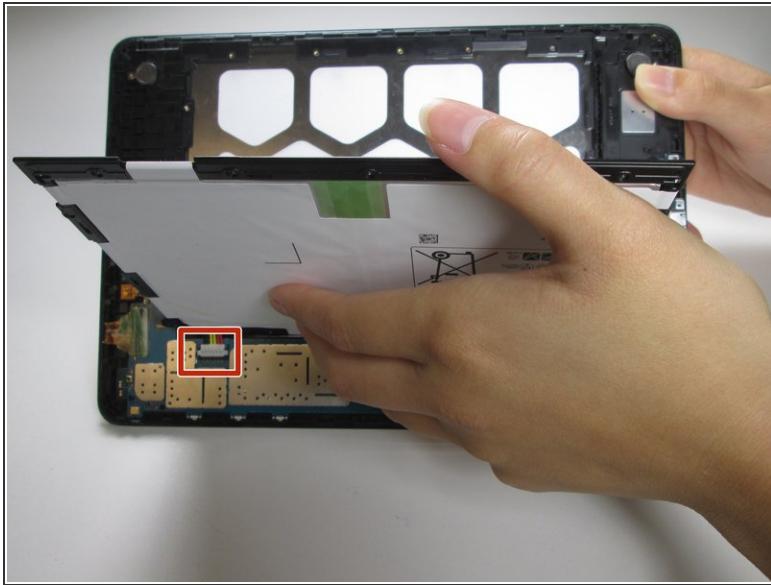

- Pull the battery out until it is only connected to the device by the black, yellow, and red connectors.

Step 5

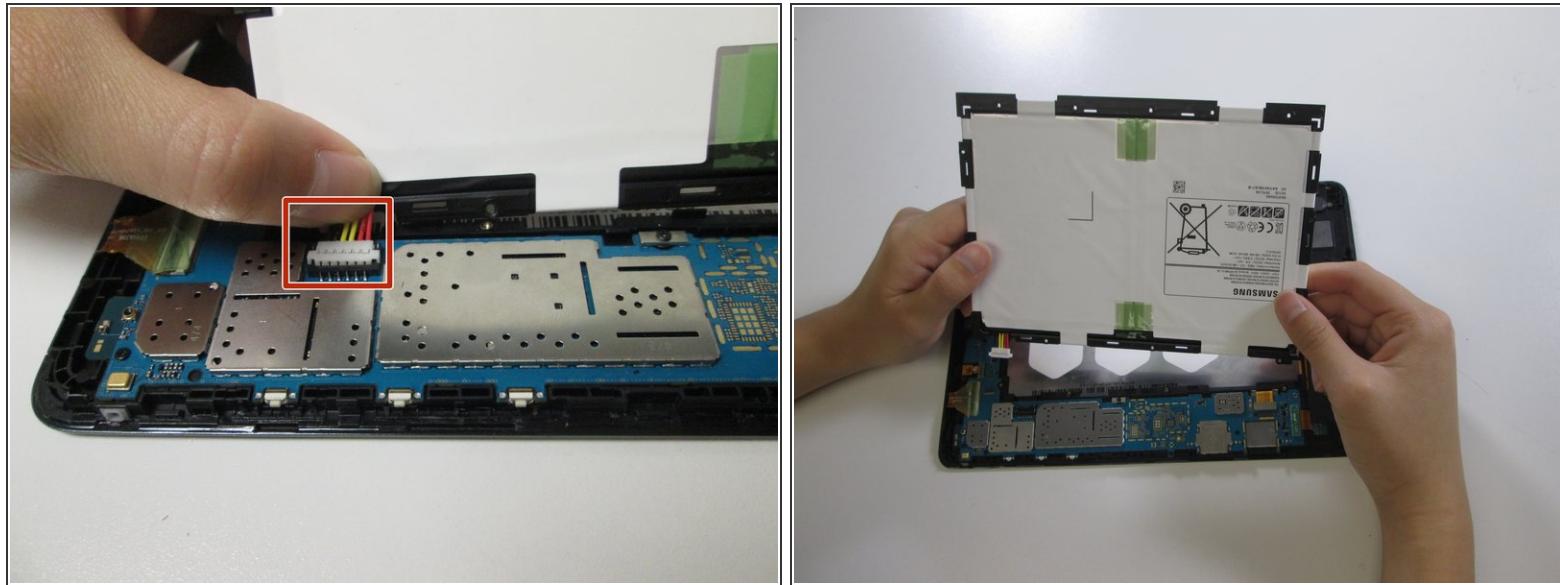

- Hold the battery and grip the wires with your thumb and finger.
- Pull the wires away from the device to remove the white connector from the black socket.
- Lift the battery away from the device.

To reassemble your device, follow these instructions in reverse order.