



Samsung Galaxy Y Touch Screen Replacement

This guide will teach you how to replace the Samsung Galaxy Y's touchscreen display.

Written By: Aidan Kurz



INTRODUCTION

This guide will describe how to replace a Samsung Galaxy Y's touchscreen and LCD display, should the touchscreen be cracked or the LCD malfunction and cause the phone to display only a black screen.



TOOLS:


- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)
- [Metal Spudger](#) (1)
- [Phillips #000 Screwdriver](#) (1)



PARTS:

- [Samsung Galaxy Y Touch Screen Display](#) (1)

Step 1 — Back Panel

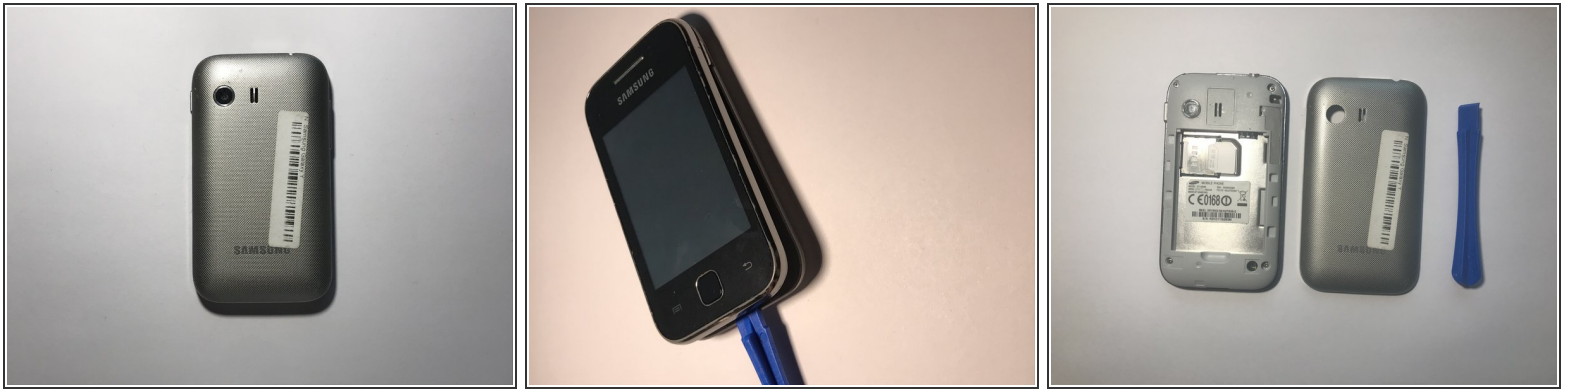

- Use the blue plastic opening tool to pry the back-panel off of the device.

Step 2 — Touch Screen/Display



- Use the screwdriver with a Phillips #000 screwdriver head to remove the four 5mm screws located in the corner of the interior back panel.
- Remove the SD card as well by sliding the card out of it's slot.

Step 3



- Use the metal pry tool to separate the interior back panel from the interior hardware and screen.

⚠ Using a metal spudger may cause further damage to your device.

Step 4



- Disconnect the orange motherboard connection, then remove the interior hardware from the front screen display.

To reassemble your device, follow these instructions in reverse order.