



Sony Cyber-shot DSC-TX7 Back Cover Replacement

Follow this guide to learn how to take off the back cover of the Sony Cyber-shot DSC-TX7.

Written By: Leslie Mundell



INTRODUCTION

This guide will teach the user how to take off the back cover of the camera.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

Step 1 — Battery



- The battery compartment is located on the bottom of camera.
- Move the slider from the 'lock' position to the 'open' position.

Step 2



(i) Battery not shown.

- Pull battery from compartment.
- Insert newly charged battery into compartment, as shown in diagram (located in compartment).
- Shut compartment door.
- Move the slider back to the 'lock' position.

Step 3 — Front Cover



- Use the Phillips #00 screwdriver to remove the 4mm length screws. There are 6 screws total.

Step 4



- The 4 mm length screws are located on each side and on the bottom of the camera.
- 2 screws on each side (4 total).
- 2 screws on bottom.

Step 5



- Gently pry around the front cover using the plastic opening tool.
- Carefully separate front cover from body of camera.


Step 6



- The front cover is now removed from the camera and the internal hardware is now visible.



 The front cover will still be connected by a ribbon. Be careful not to break the ribbon.

Step 7 — Back Cover

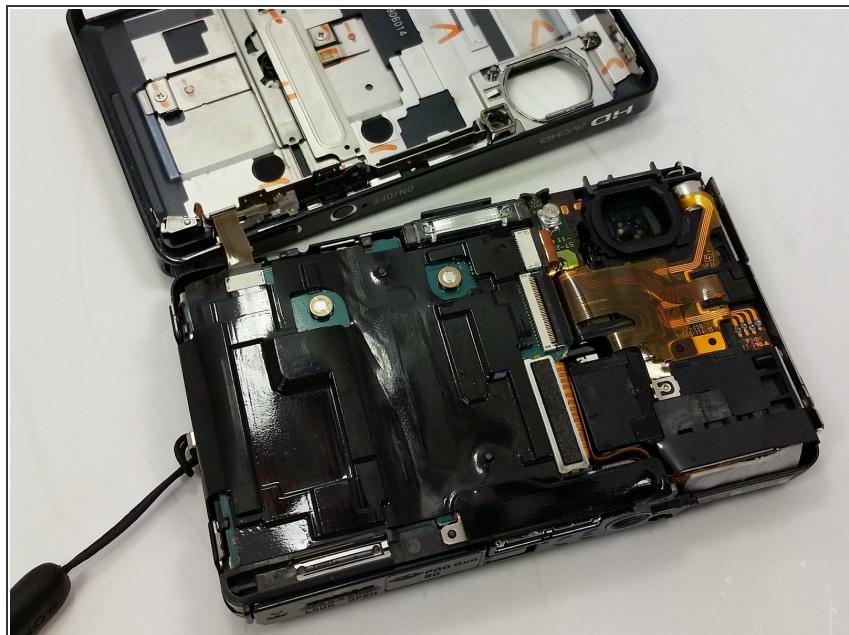



- This is the camera with the front cover unscrewed and partially removed.

Step 8

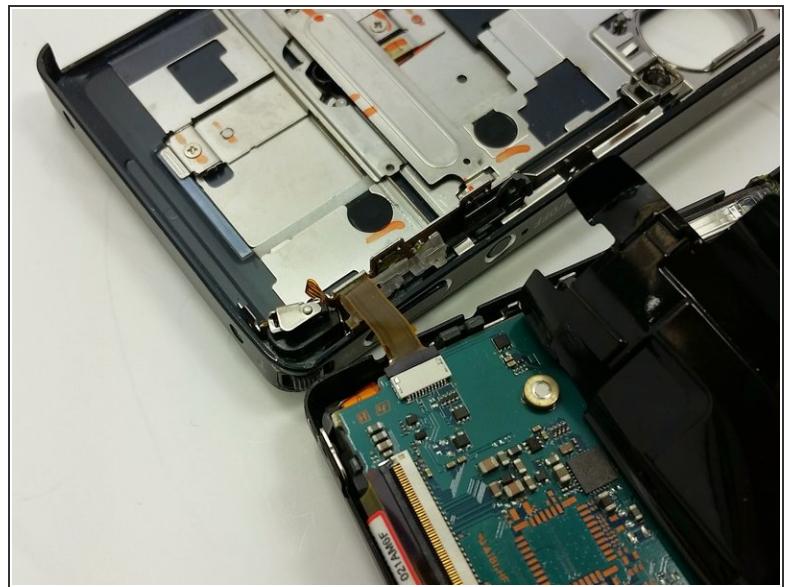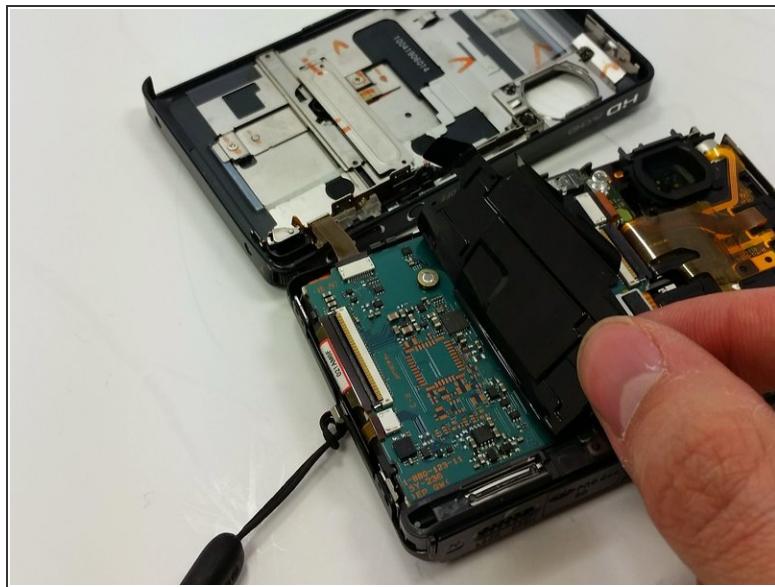


- Peel the black sticker from the motherboard.
- Locate the connection ribbon between the front cover and the body of the device.

Step 9

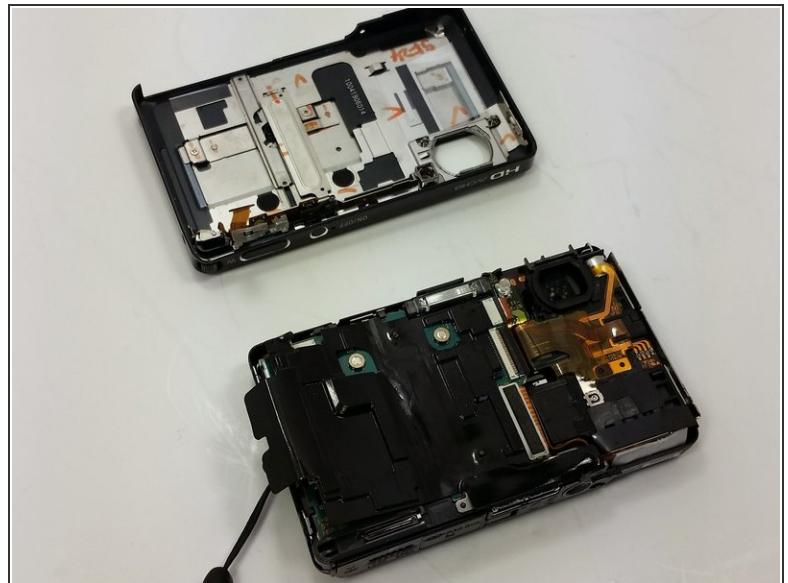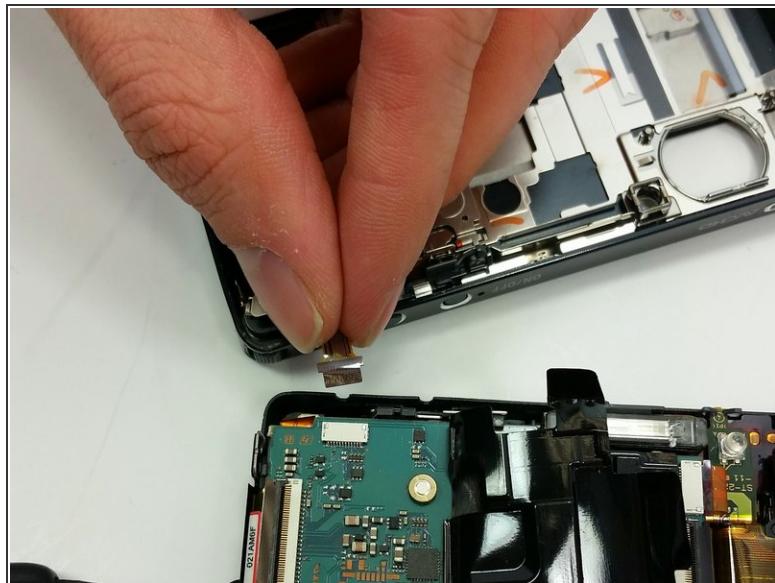


- Pull the ribbon out of the connection port so that they are completely disconnected.

Step 10

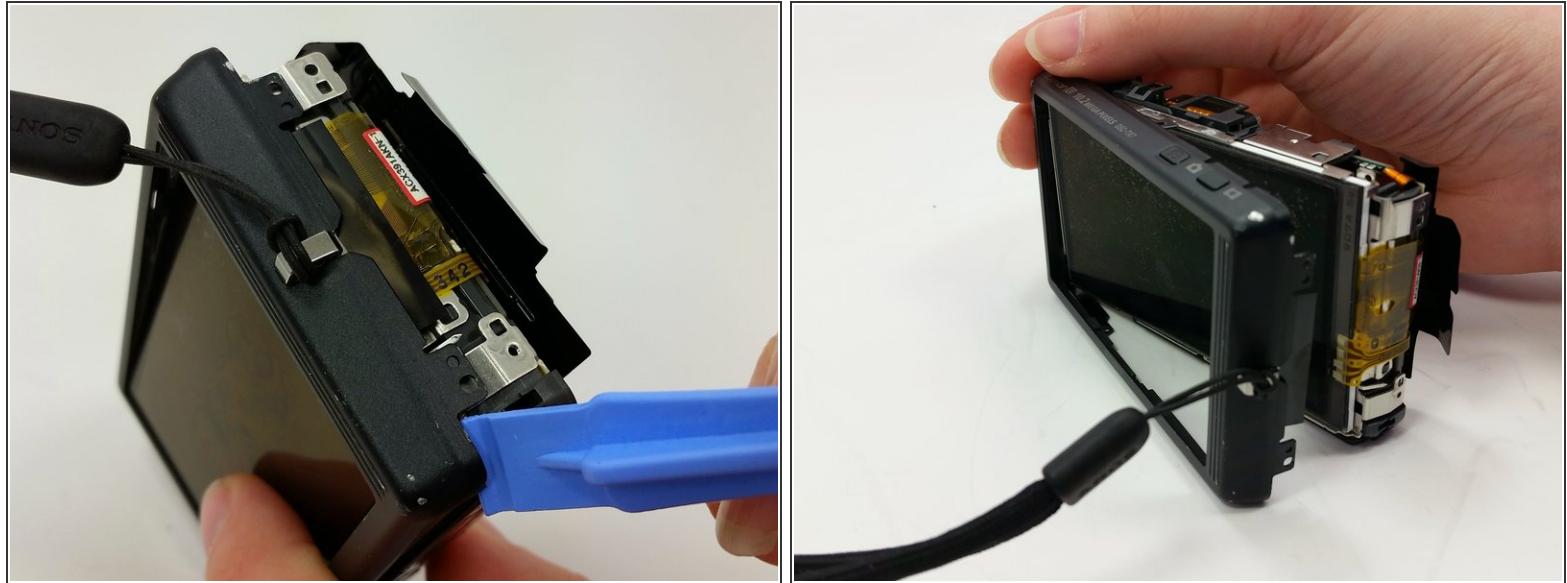

- Use the plastic opening tool to separate the back cover from the inner hardware.
- Continue until back cover can be pulled away from inner hardware.

Step 11

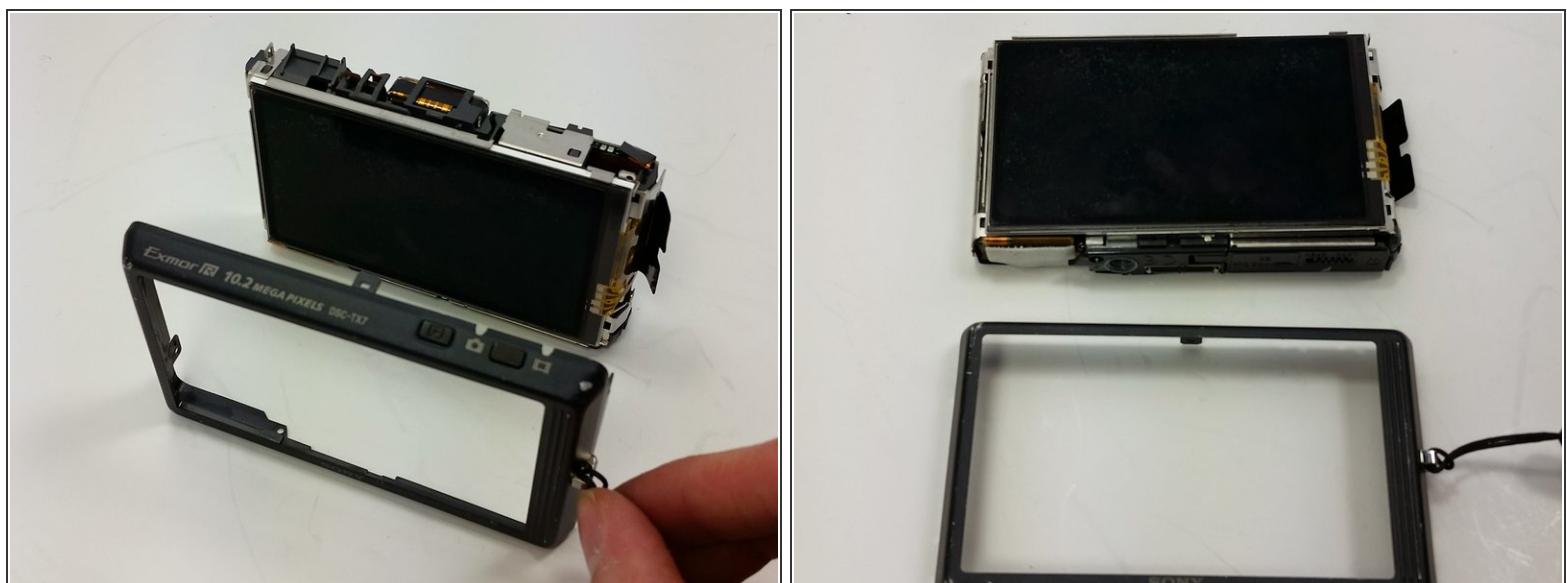

- Remove the back cover so that the back cover is now completely separate from the body of the device.

To reassemble your device, follow these instructions in reverse order.