



# Sony Vaio Fit 13A Screen Replacement

This guide will walk you through the steps of replacing the screen of your Sony Vaio Fit 13A laptop.

Written By: Marii



 **TOOLS:**

- [Tweezers \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)
- [Metal Spudger Set \(1\)](#)

## Step 1 — Screen




- Unlock the screen and lift the corner. Carefully turn it over until it faces away from the keyboard. This is the same procedure as turning the screen over to use the computer in the fashion of a tablet.

## Step 2 — Unscrew the Screen




- Locate and remove all ten 1 mm Phillips #0 screws.

## Step 3 — Remove the Screen

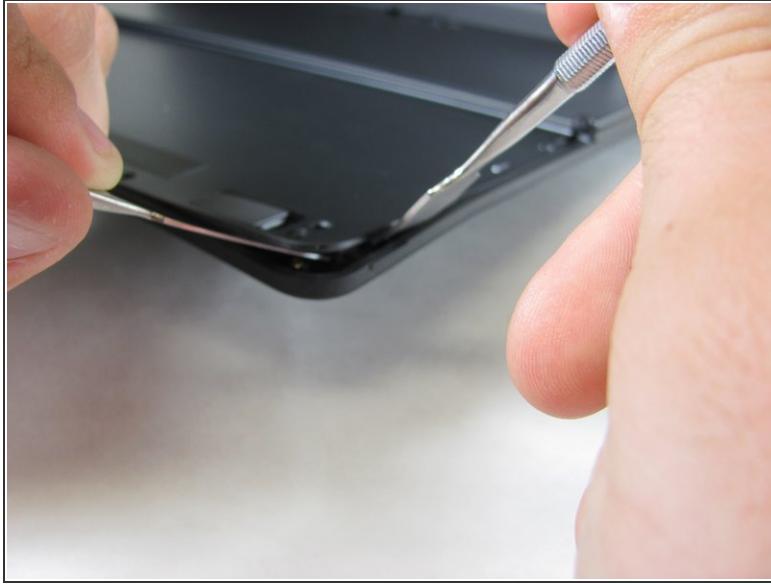

- Use the Metal Spudger Set to carefully separate screen from backing. Be sure to keep the grey panel flush with the screen front.

## Step 4 — Remove this Connection

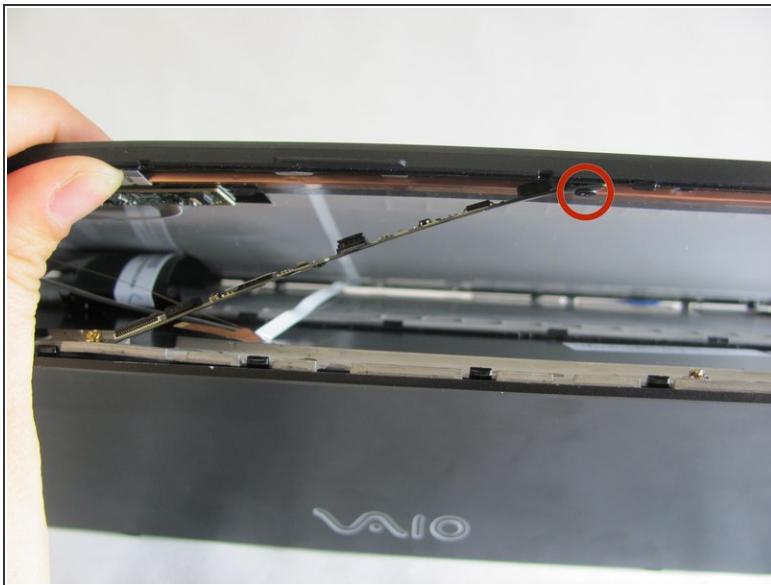

- Remove the single 1mm Phillips #0 screw that is connecting the screen and the device.

## Step 5 — Remove Strip



- Use tweezers to carefully separate the two connections of the strip from screen back panel.

## Step 6 — Screen is Now Removed



- Replace with the new screen.

To reassemble your device, follow these instructions in reverse order.