



# Toshiba Satellite CL15t-B1204X Network Card Replacement

Walk user's through the process of opening up the device, then finding and replacing the network card.

Written By: Royce Alexander Porter



This document was generated on 2020-04-04 03:32:06 AM (MST).

 **TOOLS:**

- Phillips #0 Screwdriver (1)
- Phillips #1 Screwdriver (1)
- Spudger (1)

## Step 1 — Battery



- Flip the laptop over so the bottom of the device is facing upward.

## Step 2



- Unscrew the 10 5mm Phillips screws, located on the bottom side of the notebook using the PH1 bit and the Magnetic Driver.


## Step 3



- Pry open the bottom cover of the notebook with the plastic spudger tools. Slide a thin tool along the edges without ports to pop open the latches.


 Be careful not to bend or crack the plastic back cover.

## Step 4

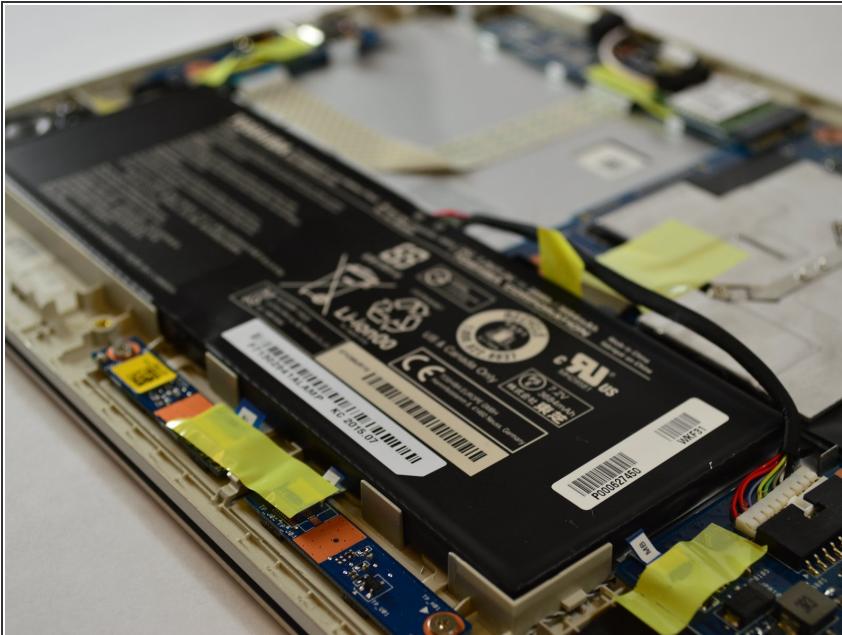


- Remove the 1" yellow tape on top of the battery. This piece of tape is holding down the battery connection cable.

## Step 5

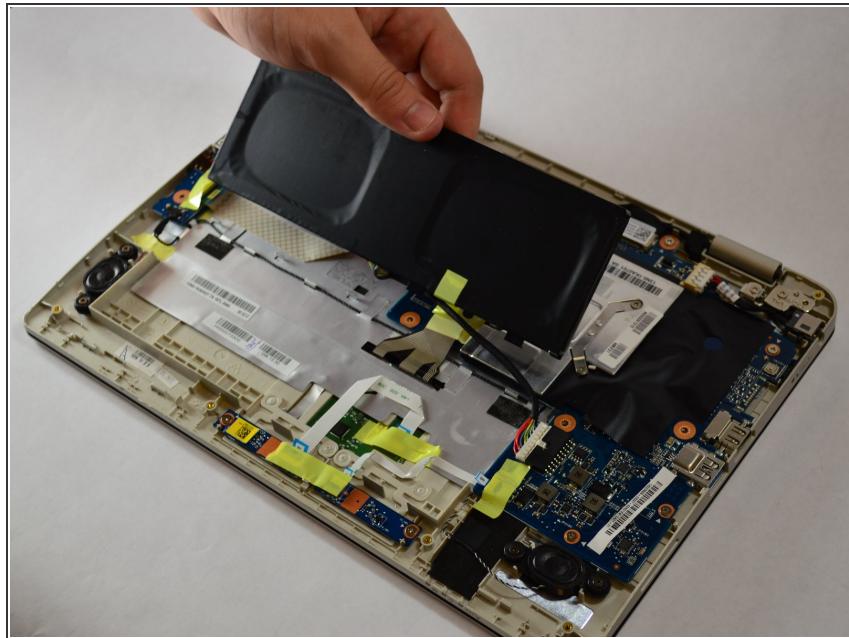



- Lightly grip the battery on the two longest sides. Gently pull up until the adhesive on the notebook is separated from the battery.

## Step 6

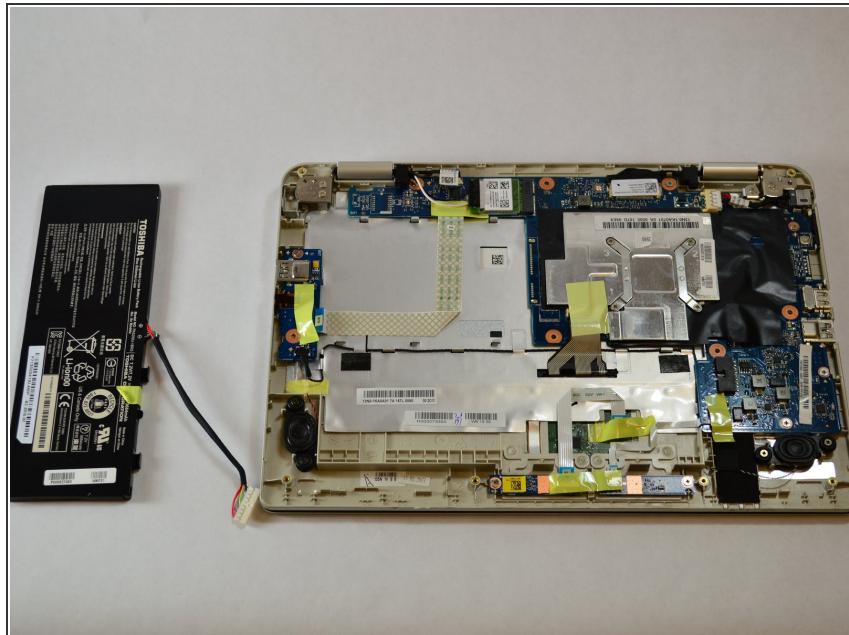


- Carefully unplug the battery from the device motherboard.

## Step 7 — Network Card

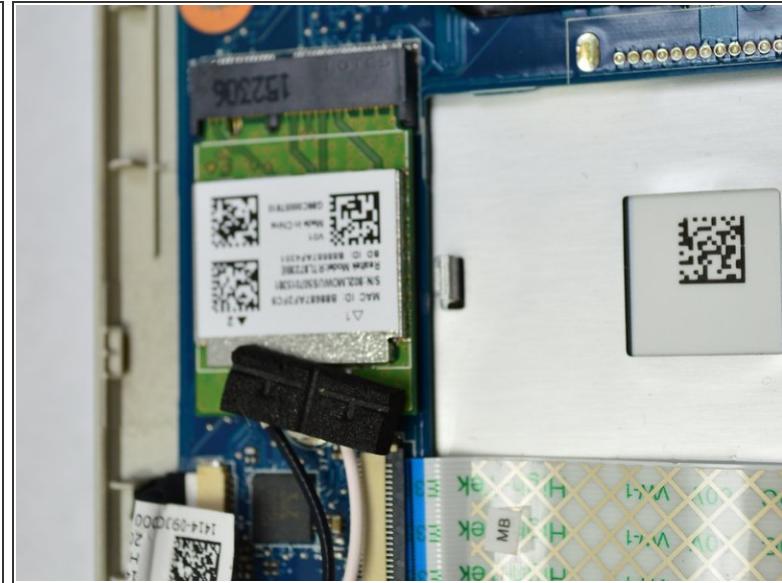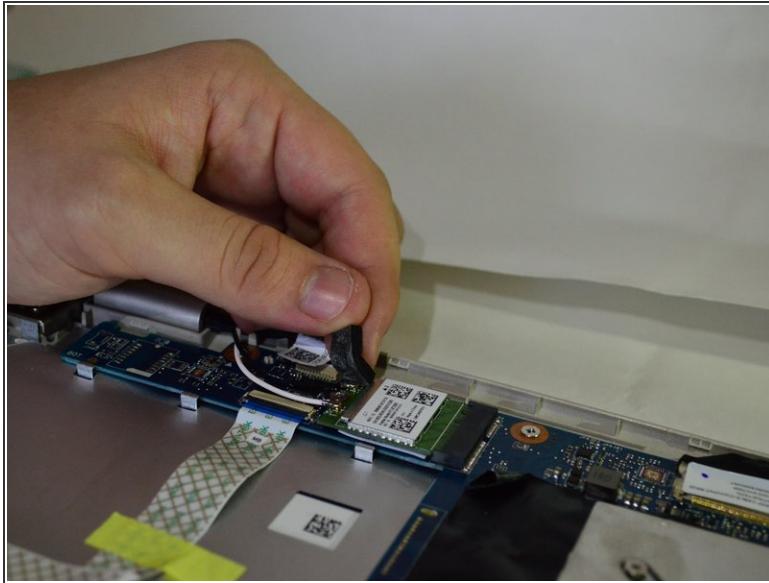

- Peel off the black antenna stuck to the card.

## Step 8

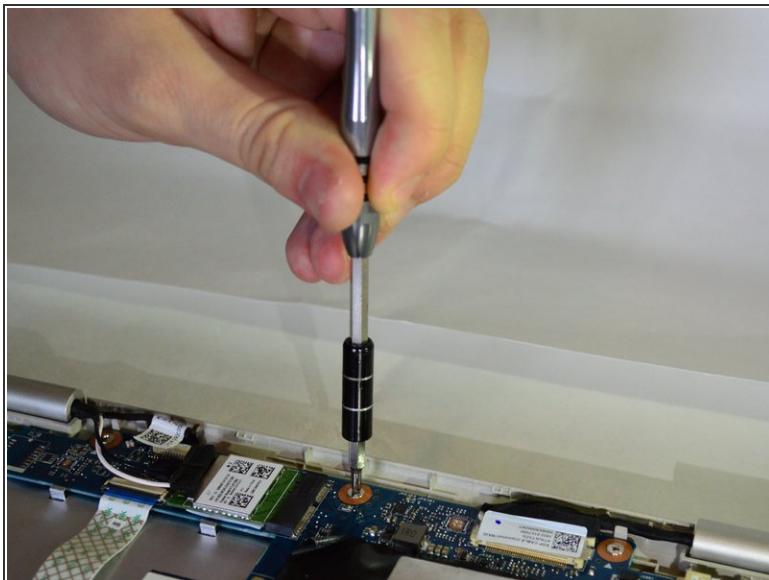

- Carefully use the PH1 screw head to unscrew the one 3mm screw on the network card found near the hinge at the top.

## Step 9



- Remove the network card.

To reassemble your device, follow these instructions in reverse order.