

Written By: Krystal



INTRODUCTION

Are the letters on your buttons fading? Use this guide to replace the buttons on your baby monitor.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Buttons



- Remove the battery cover by sliding it down.

Step 2

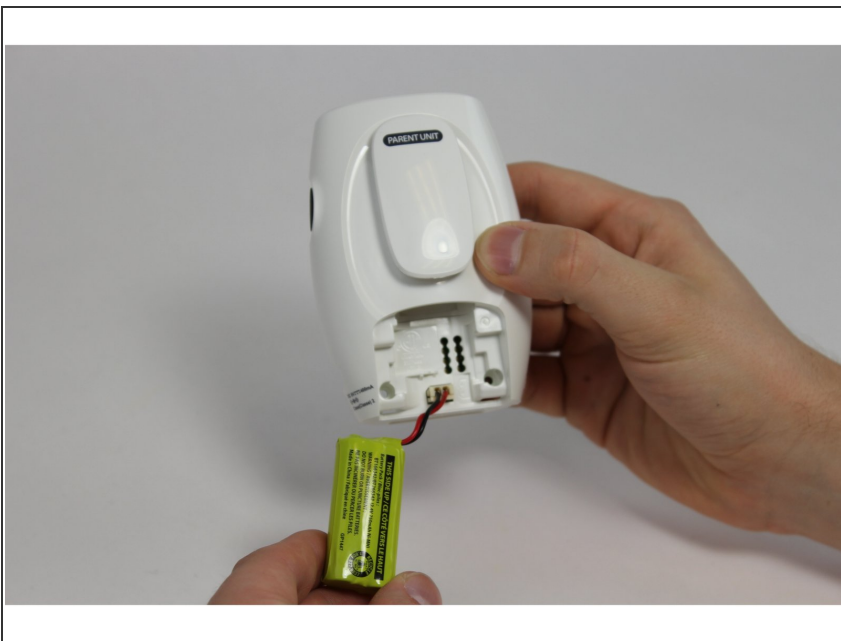

- Firmly grasp the battery and pull to disconnect the battery from its connector.

Step 3



- Using a Phillips #00 screwdriver, unscrew the two 5.0 mm screws located at the bottom of the monitor inside of the device.

Step 4



- Using a **plastic** opening tool, pry apart the front part of the device from the back. There are many

access points, but the best spot to insert the spudger is around the "TALK" button.

- ⚠ Avoid using the metal spudger. When working with electronics, it's important to choose a tool that's ESD-safe to avoid accidental damage to the device. The regular black nylon spudger or a plastic opening tool should be used whenever possible.

Step 5



- Remove the buttons from the front part of the device.

i Tip: The buttons on the front of the device ("POWER," "SELECT," "MENU," "VOLUME") are all connected as one unit. Pull them out carefully.

To reassemble your device, follow these instructions in reverse order.