




Verizon Ellipsis 10 Battery Replacement

How to remove and replace the Verizon Ellipsis 10 Battery. Model number: QTAIR7.

Written By: Mary Duran

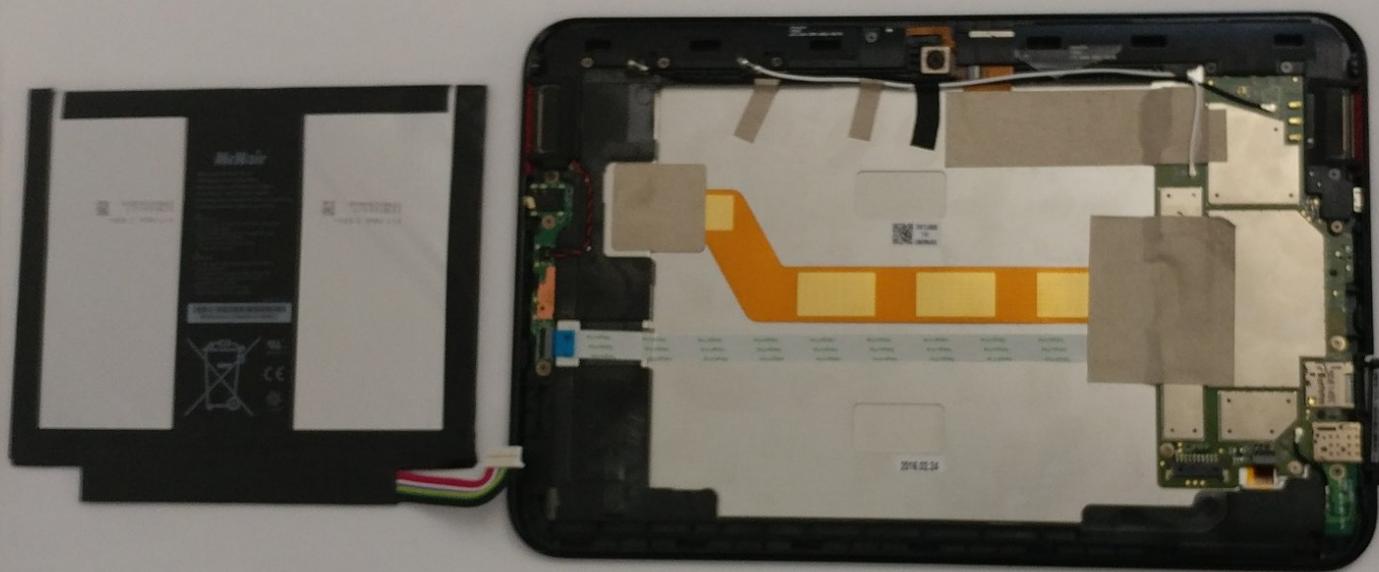

INTRODUCTION

This guide is designed to provide you with a visual and technical description to remove the battery of the Verizon Ellipsis 10.

TOOLS:

- [iFixit Opening Tools \(1\)](#)

Step 1 — Back Cover




- Open the SD/SIM card cover to start prying off the back cover.

Step 2



- Start using the iFixit Opening Tool in the SD/SIM area to release the clips holding the back panel on.

Step 3

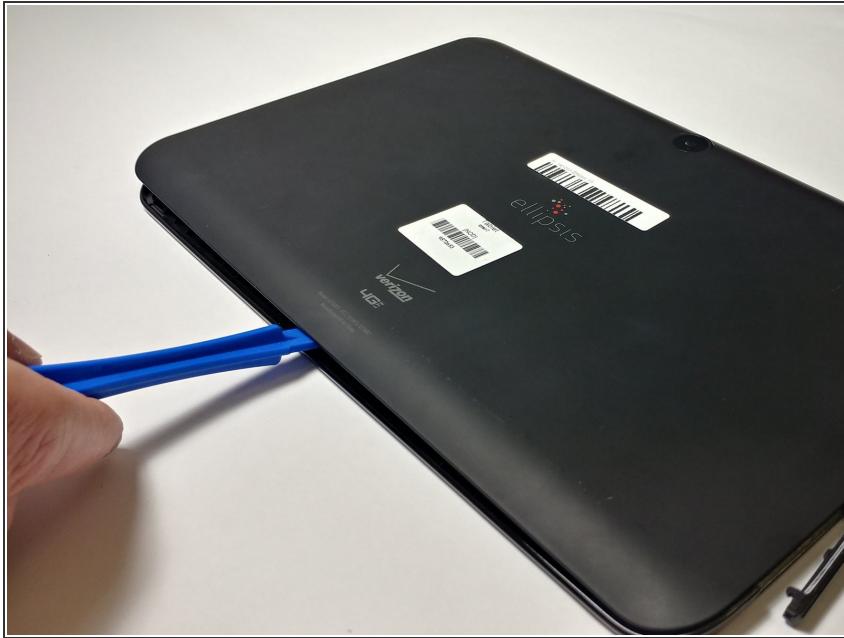

- Follow along the edge of the device to undo all of the retaining clips.

Step 4




- Once all the clips are undone, the back panel should come off with little effort.

Step 5 — Battery




- Remove the bottom piece of tape securing the battery making sure you are not peeling up anything else in the process.

Step 6

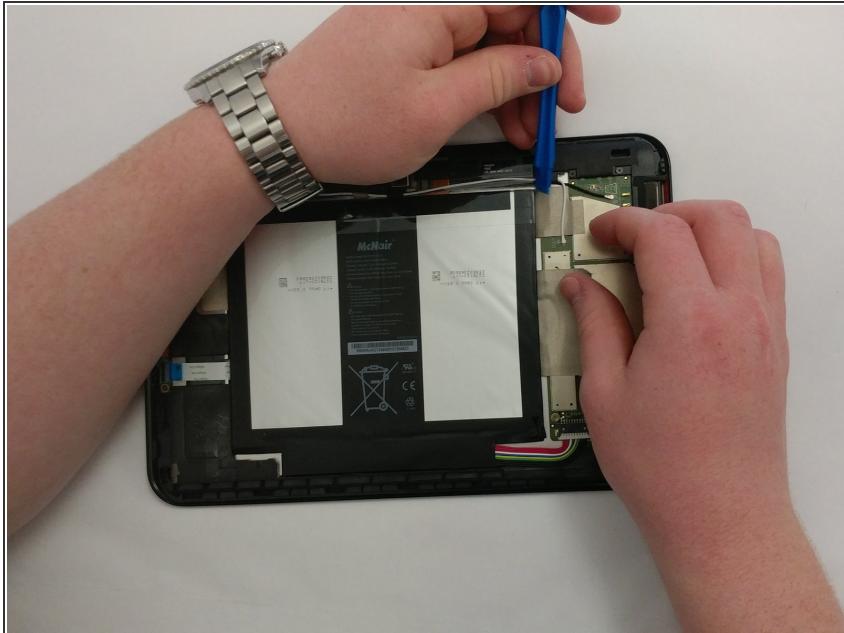

- Remove the top piece of tape. You can use the iFixit opening tool to get a hold on it.

Step 7

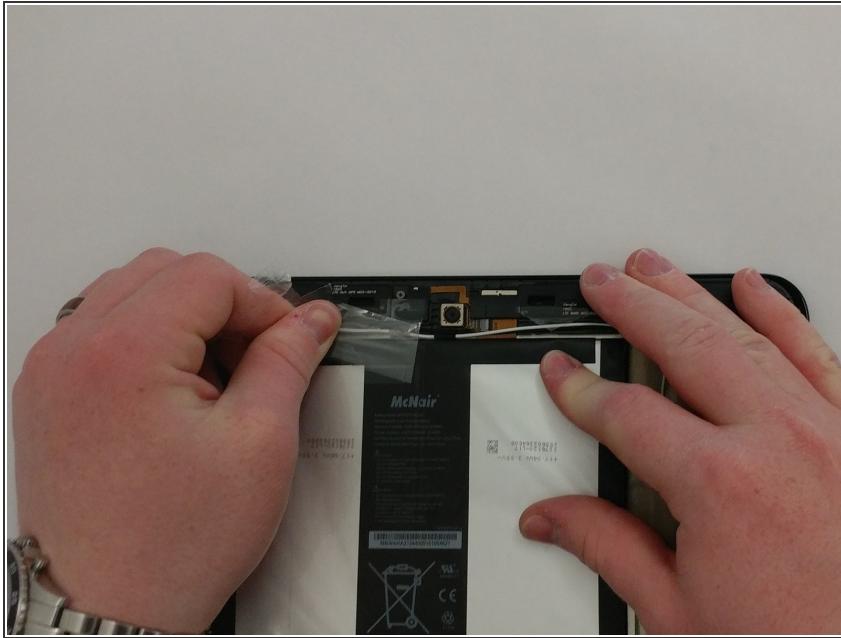


- Once you have a hold on the tape, carefully remove it making sure you aren't damaging the battery in the process.

Step 8



- Unplug the battery power connector by sliding the white plastic plug down away from the board.

Step 9

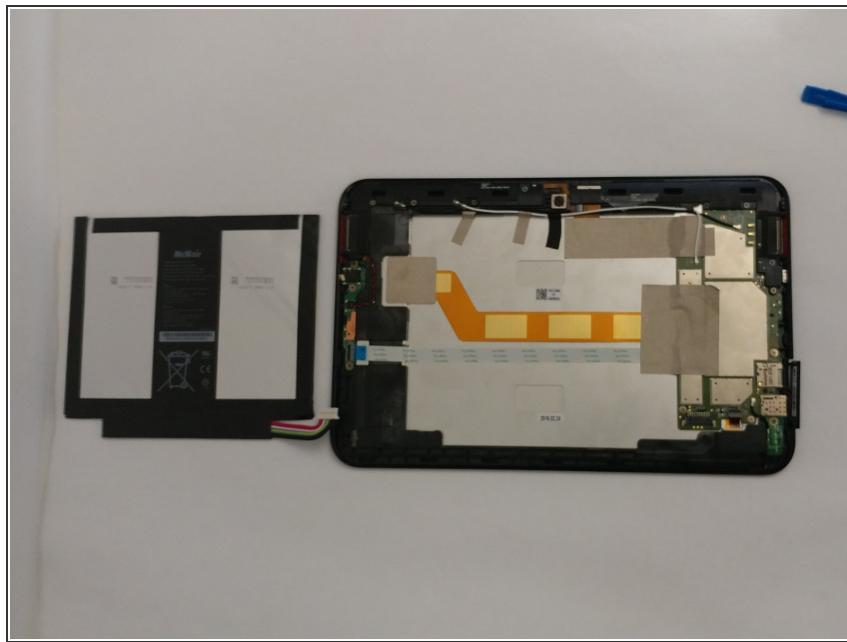

- The battery should be free to come out of the device. Make sure not to bend or damage the battery.

To reassemble your device, follow these instructions in reverse order using new tape to secure the battery.