




Vivitar XO 7 Battery Replacement

This guide will show how to remove the battery from a Vivitar XO7 Tablet.

Written By: Barron Dillman

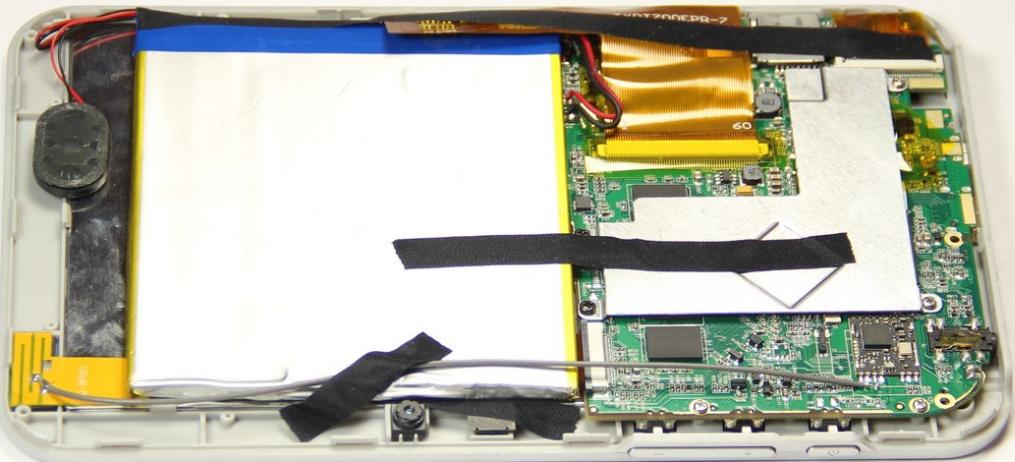

INTRODUCTION

Follow these simple steps to remove the battery from your device!

TOOLS:

- [Tweezers \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

Step 1 — Back Cover



- Remove the two 3mm Phillips #00 screws on the bottom of the tablet.

Step 2




- With the plastic opening tools, pry open the back cover.

Step 3





- Remove the back cover from the tablet.

Step 4 — Battery

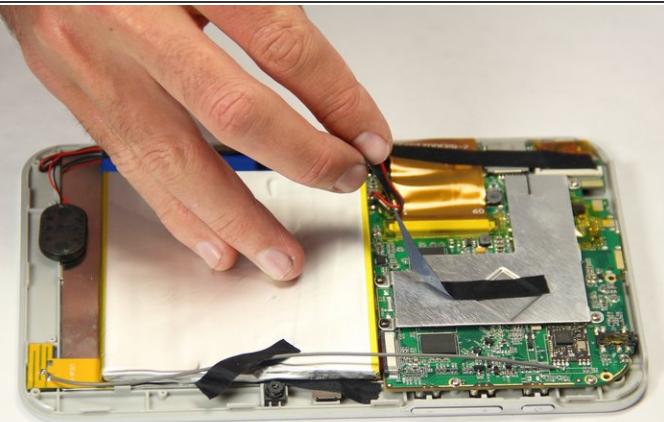



- Peel off the black pieces of tape from the internal components.

Step 5

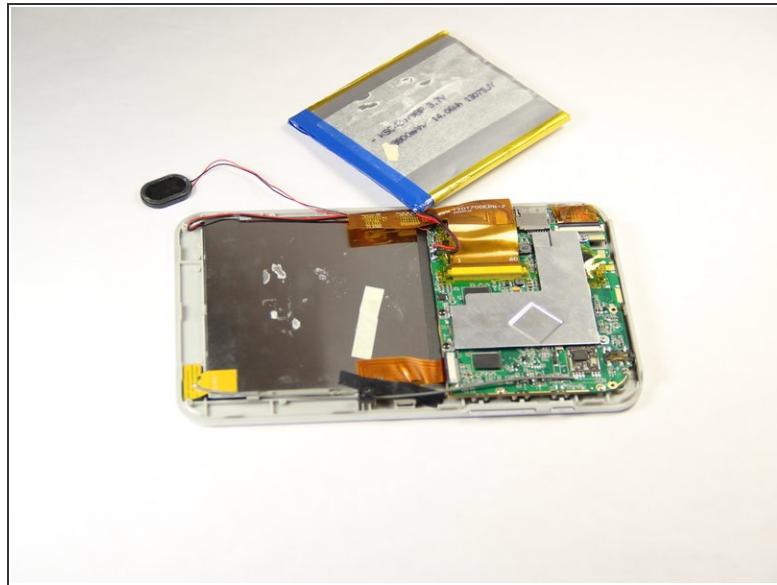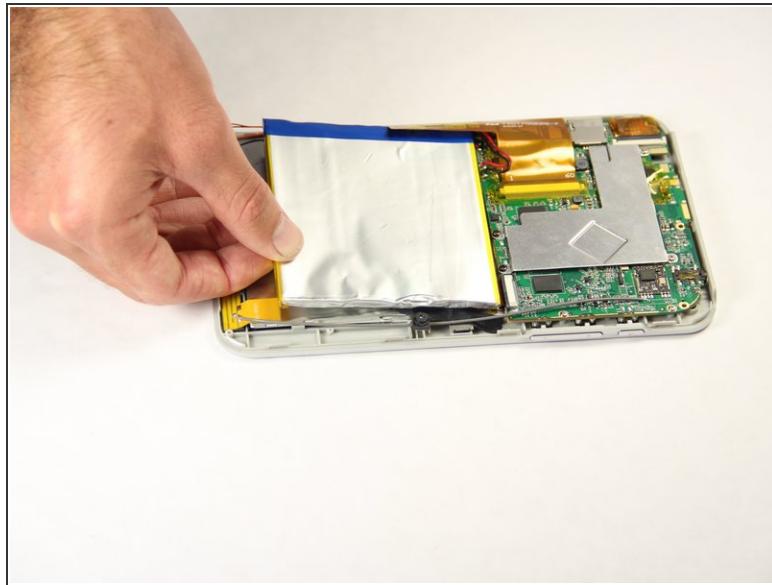

- Carefully remove the battery from the tablet.

Step 6

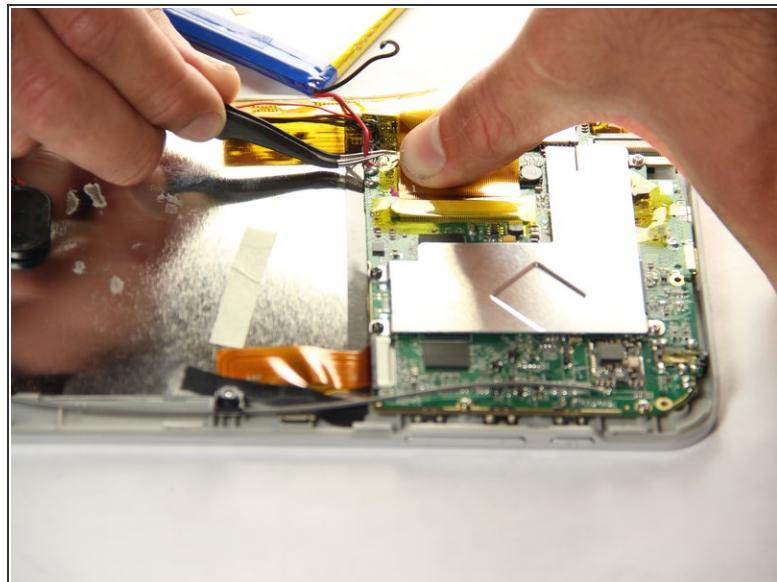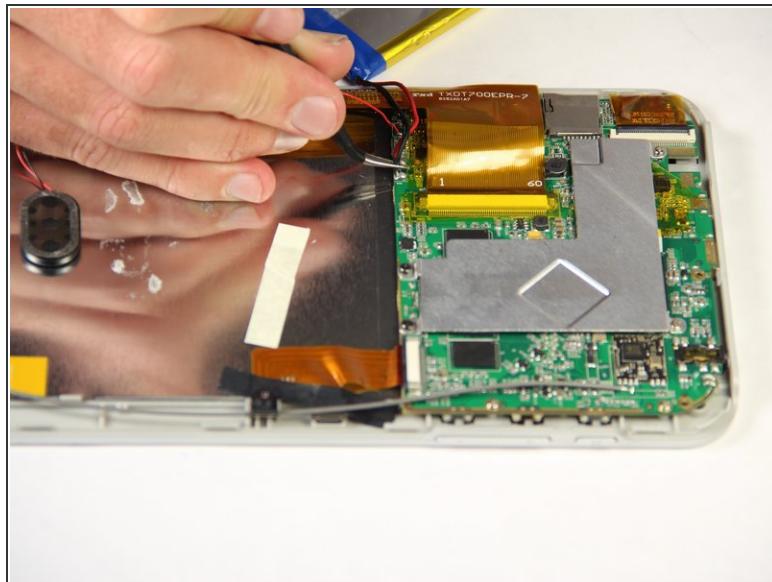

- With the tweezers, firmly grab the wire at the base and pull to disconnect the battery from the motherboard.

To reassemble your device, follow these instructions in reverse order.