




iPod 4th Generation or Photo Rear Panel Replacement

Written By: iRobot

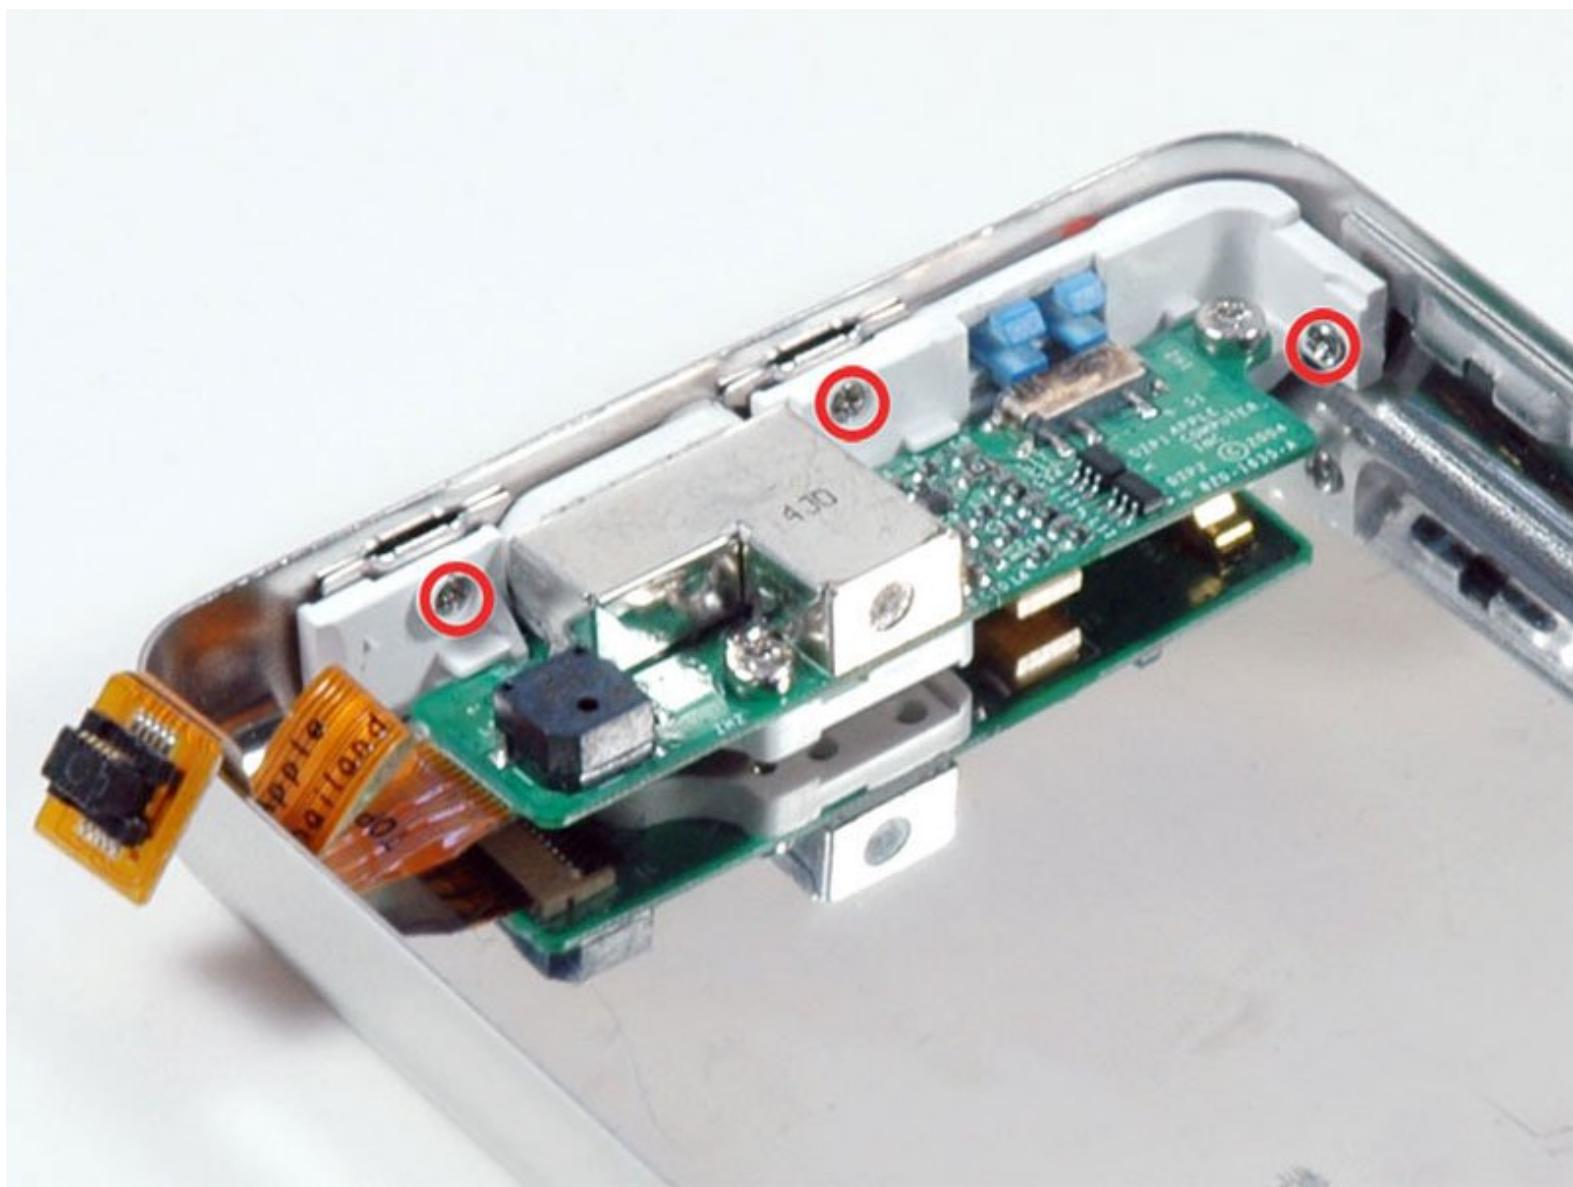

INTRODUCTION

The shiny rear half or your iPod case.

TOOLS:

- iFixit Opening Tools (1)
- Phillips #00 Screwdriver (1)

PARTS:


- iPod 4G 20 GB Rear Panel (1)
- iPod 4G 40 GB Rear Panel (1)
- iPod Photo Thick Rear Panel (1)
- iPod Photo Thin Rear Panel (1)

Step 1 — Rear Panel



ⓘ Before opening your iPod, ensure that the hold switch is in the locked position. The orange bar should be visible, indicating hold is active.

Step 2

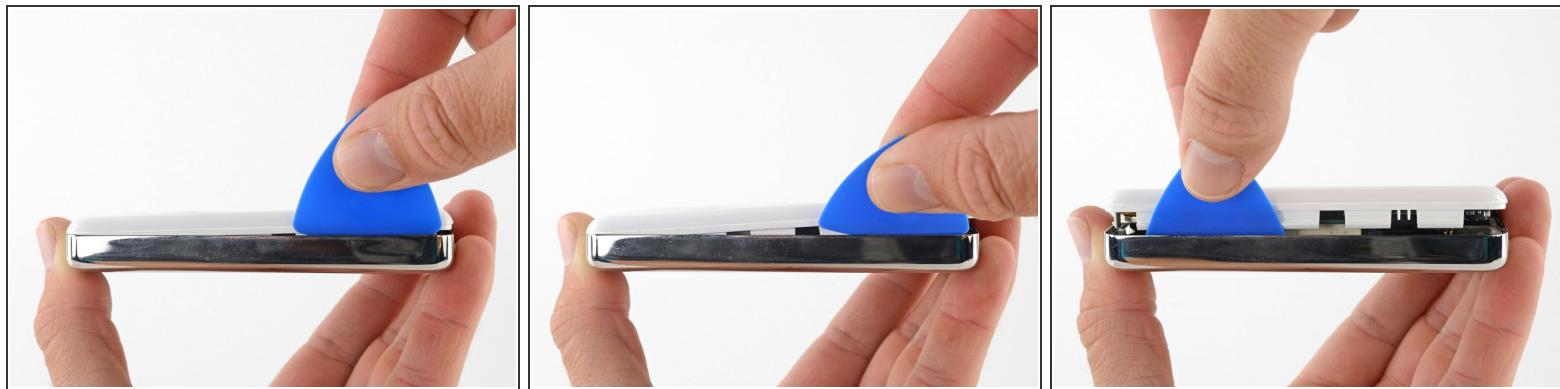


- Insert an opening pick as far as possible into the seam between the plastic front and the metal rear panel, on the right edge of the iPod.
 - You may need to rock the pick back and forth to slide it in farther.
- Use the opening pick to pry up against the plastic front panel and release five retaining tabs (seen in the third photo).
- Slide the pick along the edge of the iPod and continue prying to release the rest of the retaining tabs.
- After all five tabs along the right side are free, the case should easily open.

Step 3



- ⓘ The iPod case is now open, but don't separate the two halves just yet. There is still an orange ribbon cable connecting the headphone jack to the logic board.
- Open the case like a book with the dock connector edge at the top, and lay the rear panel next to the front half of the iPod.

Step 4

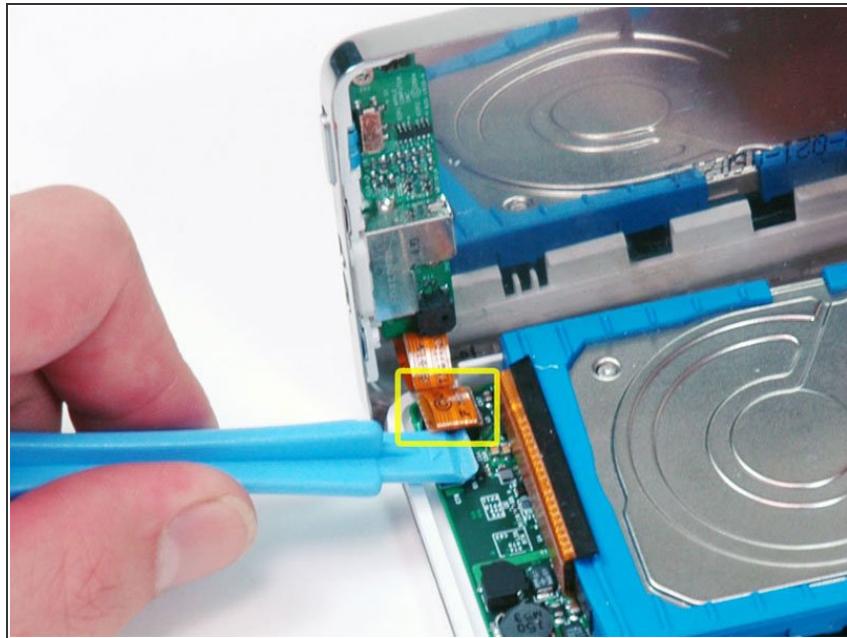


- Use a plastic tool or your fingernails to carefully disconnect the orange headphone jack cable. Be sure to pull straight up on the connector, not the cable itself.

Step 5 — Rear Panel



- Remove the 3 silver Philips screws securing the headphone jack to the rear panel.

Step 6

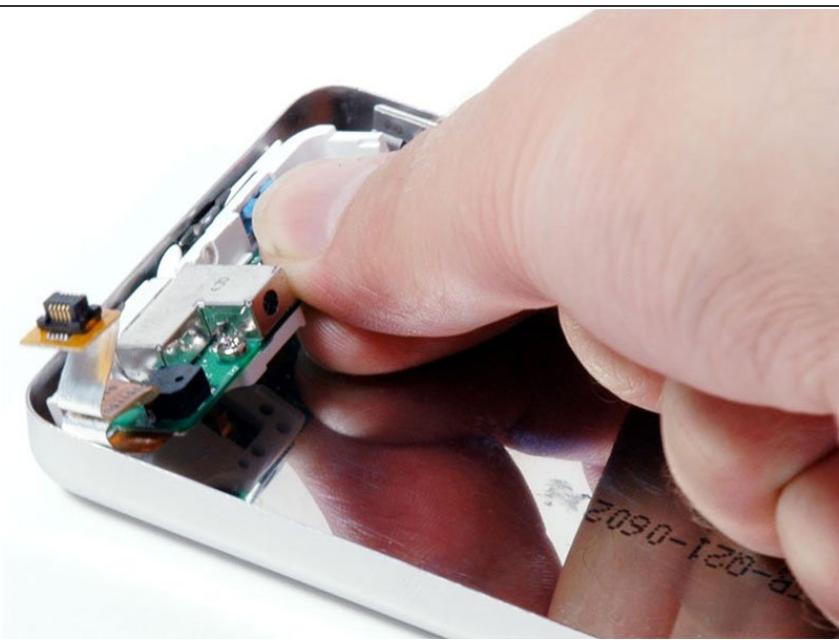

- Lift the headphone jack assembly out of the iPod.
- Rear panel remains.

To reassemble your device, follow these instructions in reverse order.