




iVIEW-754TPC Battery Removal

Prerequisite Only


Written By: Robert Clark

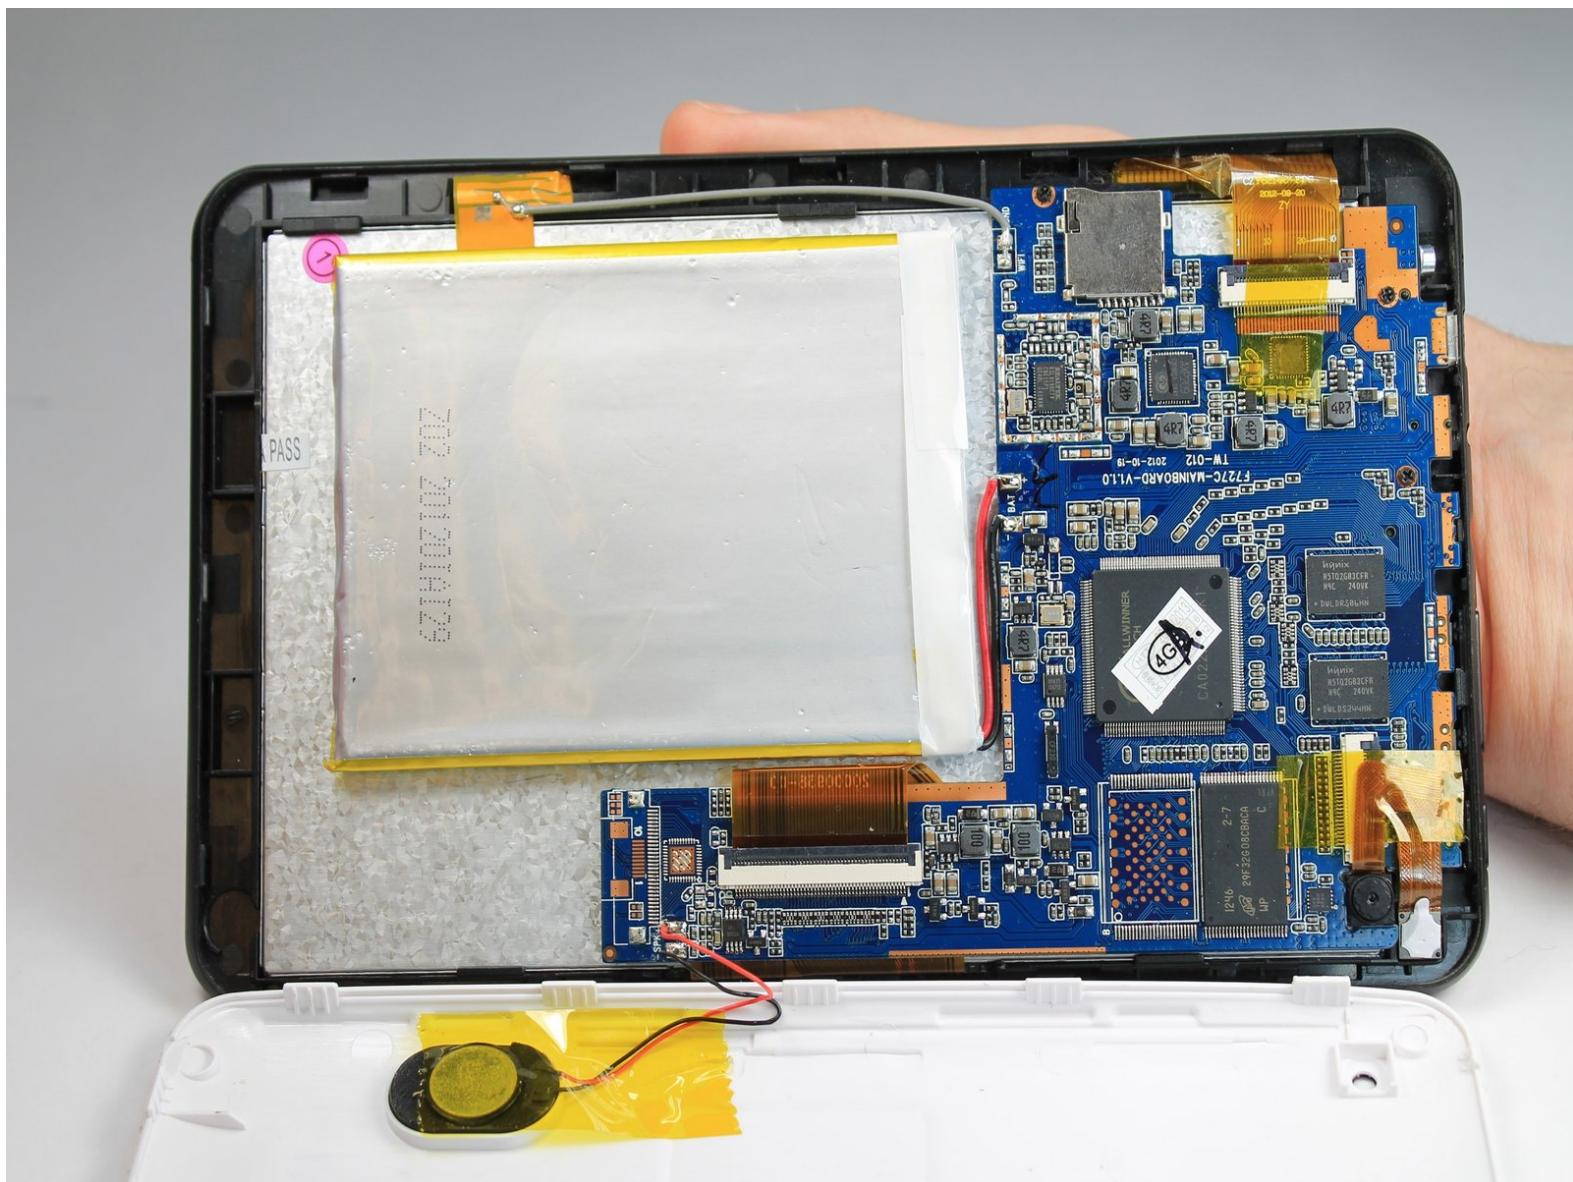

 **TOOLS:**

- [Spudger \(1\)](#)

Step 1 — Remove Battery

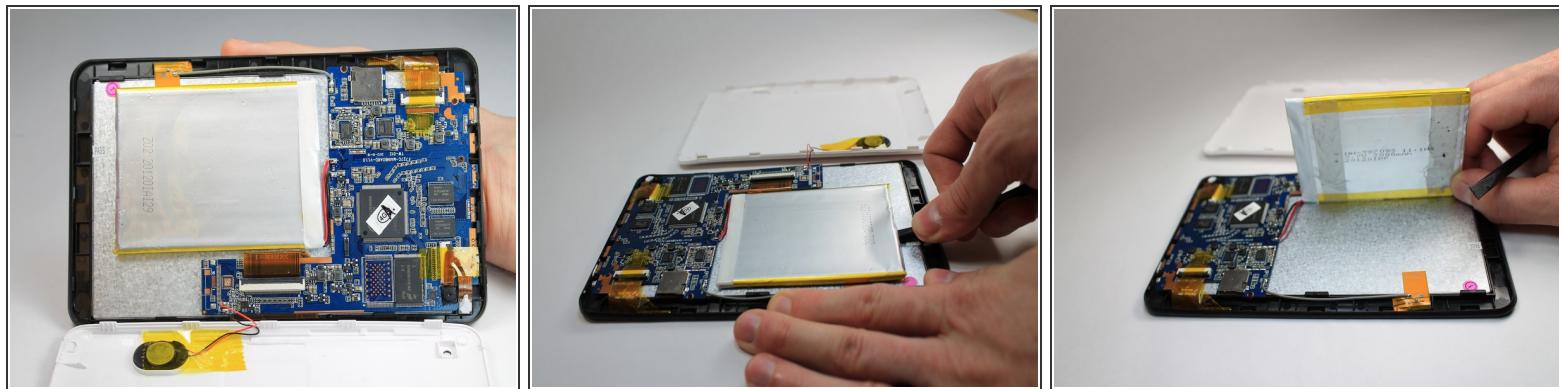

- Use flat side of the spudger to get under battery and use pressure to release from glue. Do this all the way around battery until it comes off.
- *(i)* At this point do not attempt to fully remove the battery as it is still attached to the logic board.

To reassemble your device, follow these instructions in reverse order.